



2026 Owner's Manual

OPEN ROAD
A L L E G R O



DISCLAIMER

Many of the features and appliances described in this manual might not be reflected in the actual motorhome purchased, depending on the options and models selected by the motorhome owner. All items, materials, instructions, and guidance described in this manual are as accurate as possible at the time of printing. However, due to Tiffin Motorhomes' ongoing and dedicated commitment to excellence, improvement of Tiffin's motorhomes is a continuing process. Consequently, Tiffin Motorhomes reserves the right to make substitutions and improvements in its makes and models of motorhomes without prior notification. Substitutions of comparable or better materials, finishes, appliances, instrumentation, and instruction might be made at any time it is deemed prudent to provide the customer with the best possible motorhome, meeting the customer's requirements.

Copyright © by Tiffin Motorhomes, Inc. – all rights reserved.

**Tiffin Motorhomes, Inc.
105 2nd St. NW
Red Bay, AL 35582
Phone: 256-356-8661**

**Fax: 256-356-8219
Email: customersupport@tiffinmotorhomes.com
www.tiffinmotorhomes.com**



TIFFIN

Many Adventures. One Dream.™



There are many ways to adventure in our products, but all customers share a similar dream of leisure, exploration, and fun while making lifelong memories with the most important people in their lives. Our products are the vehicle for customer's adventures and helping them realize their dreams.

TABLE OF CONTENTS

1 General Information.....	9
Welcome to a life of “Roughing it Smoothly”.....	10
About This Manual:.....	10
Delivery:.....	10
Dealer Responsibilities:	11
Customer Responsibilities:	11
Reporting Safety Defects (USA):.....	12
Reporting Safety Defects (Canada):.....	12
Signalement Des Defauts De Securite A Transport Canada Pour Les Proprietaires Canadiens:	13
Tiffin Motorhomes Limited Warranty:.....	13
Major Equipment Manufacturers:.....	13
Warranty Service:.....	14
Owner’s Information Package:.....	14
Customer Relations:.....	15
Specification Labels:.....	15
Weighing Procedures:.....	16
Weight Distribution:.....	17
Safety Messages.....	17
2 Safety Instructions	19
Safety Considerations.....	20
General Warnings	20
Pre-Departure Checklist	21
Driving Safety.....	22
Fuels for the Motorhome:.....	23
Liquid Propane (LP) Gas System:.....	24
LP Gas Regulator:.....	26
LP Distribution System:.....	26
Recommended Practices:	27
Carbon Monoxide Warning:.....	27
CO/LP Gas Detector:.....	28
Fire Safety and the Fire Extinguisher:.....	29
Smoke Detector:.....	30
Electrical:.....	31
Loading:	31
Maintenance:.....	31
Emergency Exits:.....	31

TABLE OF CONTENTS

Parking Procedures:.....	32
Towing Hitch:.....	33
3 Heating & Air Conditioning	34
Furnace:.....	35
Air Conditioning System:.....	36
Thermostat on Spyder Controls System:.....	37
Heat Pump Controls:.....	38
4 LP Gas System.....	39
LP Gas Tank Filling & Monitoring:.....	40
5 Major Appliances.....	41
Residential Refrigerator:.....	42
Ice Maker:.....	42
Microwave Oven:.....	43
Air Filtration Fan:.....	43
CookTop and Optional Oven:.....	43
To light the Oven for the First Time:.....	44
To operate the Three-Burner Cooktop:.....	44
Water Heater:.....	46
120 Volt AC Electrical Operation:.....	46
Water Heater Storage:.....	46
Pressure Relief Valve:.....	47
6 Entertainment.....	48
Television Antenna:.....	49
Television Satellite Dish (Optional):.....	49
Flat Screen Television and Soundbar:.....	50
7 Cabinets & Furniture.....	51
Cabinets:.....	52
Furniture: Kitchen, Living, & Dinning Areas	53
8 Structural Features	57
Chassis Features:.....	58

TABLE OF CONTENTS

9 Electrical Features.....	59
General Information:.....	60
External Solar Port:.....	61
Electrical Cautions:.....	61
Circuit Breaker Boxes:.....	62
Auxiliary Start Switch:.....	62
Battery Inspection and Care:.....	63
120 Volt (VAC) AC Receptacles:.....	65
12 Volt DC (VDC) Receptacles:.....	65
USB Receptacles:.....	65
Ground-Fault-Circuit-Interrupt Receptacles:.....	66
Converter/Inverter:.....	66
Electrical Generator:.....	68
Automatic Transfer Switch:.....	69
Circuit Breakers:.....	69
Fuse Blocks:.....	69
Seven-Pin Towing Connector:.....	70
Solar Roof Top Prewire (Optional):.....	71
WIFI-Satellite Preparation:.....	71
House Battery Disconnect Panel:.....	71
12 Volt DC Disconnect Switch:.....	71
Spyder Controls System:.....	72
Multiplex System:.....	73
Wifi Antenna (Optional):.....	73
Electrical Diagram location Link:.....	74
10 Slide-Out Features.....	77
Slide-Out Overview:.....	78
General Considerations:.....	78
Operating Precautions:.....	79
Extending the Slide-Out Room:.....	79
Retracting the Slide-Out Room:.....	80
Emergency Slide-Out Room Control Override:.....	80
11 Exterior Features.....	82
Towing Hitch:.....	83
Exterior Sides:.....	83
Security Lights:.....	83

TABLE OF CONTENTS

Roof & Ladder:.....	84
Electric Steps:	85
Using the Electrical, Double- Entrance, Door Steps:.....	85
Mirrors:.....	86
 12 Interior Features.....	 88
Bedspread:.....	89
Elevated Beds- Caution:.....	89
Flooring:.....	90
Ceiling/Lighting:.....	91
Overhead Bunk Bed:.....	91
Window Treatments:	92
 13 Plumbing & Bath Features.....	 93
Freshwater System:	94
Tank-Level Monitor:.....	94
Kitchen Sink:.....	94
Bathroom sink, Shower, & Accessories:	94
Showermiser:.....	95
Water Pump:	95
City Water Connection:.....	96
Filling the Freshwater Tank:.....	97
Water Filter:.....	97
Sanitizing:.....	98
Water Heater Bypass System:	99
Freshwater Lines:.....	99
Wastewater System:.....	99
Wastewater General Information:.....	99
Toilet:.....	100
Black-Water Holding Tank:.....	100
Gray-Water Holding Tank:	101
P-Traps:.....	101
Wastewater Disposal:.....	101
Sewer Connection and Camping:.....	102
No Fuss Flush:.....	102
Exterior Shower	103
 14 Windows, Awnings, Vents, & Doors.....	 104
Windows:	105

TABLE OF CONTENTS

Awnings:.....	105
Vents:	107
Doors:.....	108
 15 Driving Your Motorhome.....	 109
Ecomaster Camera Monitor System:.....	110
Basic Rear View Camera Operation:.....	110
Side-Mount Camera:.....	110
AM/FM Stereo System:.....	111
Dashboard Heating/Cooling Controls:.....	111
Automatic Leveling System:.....	111
 16 Routine Maintenance	 113
Washing:	114
Seals:.....	115
Proper Sealants for Application:	115
Wheel Care:.....	116
Roof Care & Maintenance:.....	116
Moisture Management:.....	116
Interior Care of Your Motorhome:.....	117
Control Relative Humidity:.....	117
Avoid Drastic Thermostat Setbacks:	117
Manage Window Condensation:.....	117
Carpet Care and Moisture Management:	117
Cleaning Floors:.....	118
Storage and Other Isolated Areas within the Motorhome:	118
Use of Un-Vented Combustion Equipment:.....	118
Exterior Care of Your Motorhome:.....	118
Use of Your Motorhome:.....	119
Severe Environments:.....	119
Storage of Your Motorhome:.....	119
Modifications to Your Motorhome:	119
Wet Areas:	120
Tire & Safety Information:.....	120
Section One:.....	120
Section Two:	128
Section Three:.....	129
Tire Pressure:.....	132
Interior Care:.....	136

TABLE OF CONTENTS

Fabrics:.....	137
Walls & Ceiling:	138
Dashboard:.....	138
Woodwork & Floors:.....	138
Countertops:	139
Accessories:.....	140
Detectors:	140
Condensation:.....	140
Routine Maintenance Schedules:.....	141
Winterizing:	142
De-Winterizing:	145
 17 Maintenance & Data Charts	 146
RV Owner Data Sheet:.....	147
RV Owner Maintenance Record.....	148

GENERAL INFORMATION

Chapter

1

WELCOME TO A LIFE OF “ROUGHING IT SMOOTHLY”:



**Tiffin Motorhomes – Made to
Move You**

Tiffin Motorhomes is excited that you have entered the world of motorhome travel, and we believe that you and your family will enjoy this way of life for years to come. Your Tiffin-built motorhome provides many of the comforts of home while allowing you to travel



freely as you choose. However, before heading out on the open roads, make yourself familiar with this owner's manual to learn more about the operations of your

motorhome. Also, work with your dealer to learn as much as possible about the functionality and features of your coach. In addition, remember, *“Wherever you go, we go.”*

ABOUT THIS MANUAL:

Carefully read this manual to understand how everything in your motorhome works.

NOTE: This operator's manual describes the features of your motorhome and includes instructions for their safe use. The manual, however, including its photography and illustrations, is of a general nature. Some equipment and features described in this manual might be optional or unavailable on your model.

The instructions included are meant to serve as a guide and in no way extend the responsibilities of Tiffin Motorhomes beyond the standard written warranty. The descriptions, illustrations, and specifications in this manual were correct at the time of printing and Tiffin Motorhomes reserves the right to change specifications or design without notice, and without incurring the obligation to install the same on products previously manufactured.

Many of the instruction sheets and manuals for the various appliances inside your motorhome have been incorporated into this manual for your convenience.

DELIVERY:

Throughout the entire manufacturing process, your Tiffin Motorhome has been regularly inspected by our qualified personnel to ensure that you receive the finest product of the highest quality. However, the final inspection at our factory is not the last one. The pre-delivery inspection and system check that your dealer perform are the final inspections before you receive your new motorhome. Your dealer is also available to assist you in understanding the warranties and completing the necessary forms to activate the warranties for the various appliances and accessories installed in your motorhome.

DEALER RESPONSIBILITIES:

- **A pre-delivery inspection and systems check** is performed to ensure a thorough inspection of the motorhome and the proper operation of all factory-installed components.
- **A customer walk-through** is performed to familiarize the buyer with the motorhome, its systems and components, and their proper and safe operation.
- Delivery of the **Owner's Information Package**, which contains warranty cards and registrations for the vehicle and all factory-installed components from other vendors and suppliers to Tiffin Motorhomes. The detailed operation and maintenance instructions on these components are also included in this package.
- Assisting the customer in **completing the registration forms** to avoid loss of warranty coverage. The dealer will review the limited-warranty provisions with the customer and stress the importance of completing the warranty cards and registration forms for the components in the motorhome to enable the manufacturers to receive them within the prescribed time limits.
- Providing the customer with **information regarding warranty and non-warranty work** on the vehicle and its separately warranted components.

CUSTOMER RESPONSIBILITIES:

The customer is responsible for regular and proper maintenance of the motorhome. Properly maintaining your motorhome will prevent conditions arising from neglect that are not covered by your Tiffin Motorhomes limited warranty. The maintenance guidelines in this manual and any other applicable manuals must be followed. It is your responsibility and obligation to return the vehicle to an authorized dealer for repairs and service. To assist you in avoiding problems with your motorhome, Tiffin Motorhomes recommends that you do the following:

- **Read the warranty.** Go over it thoroughly with your dealer to make sure you understand all the terms and conditions of the warranty.
- **Inspect the motorhome;** do not accept delivery until after you have gone through the motorhome with the authorized Tiffin Motorhomes dealer.
- **Ask questions** about anything you do not fully understand about your motorhome. Tiffin Motorhomes is here to serve you and ensure that you have all the information necessary for the safe and enjoyable use of your new motorhome.
- When you are taking the delivery, **set an appointment for adjustments.** This appointment must be within two weeks after you accept delivery.
- You are responsible for using **your motorhome in a responsible, safe manner.** Take the time to familiarize yourself with the proper operation of the unit before you attempt to use it.

REPORTING SAFETY DEFECTS (USA):

575.6(a)(2)(i) At the time a motor vehicle manufactured on or after September 1, 1990 is delivered to the first purchaser for purposes other than resale, the manufacturer shall provide to the purchaser, in writing in the English language and not less than 10-point type, the following statement in the owner's manual; or, If there are no owner's manual, or a one-page document:

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying TIFFIN MOTORHOMES.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Tiffin Motorhomes.

To contact NHTSA, you may either call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to <http://www.safercar.gov>; or write to: Administrator, NHTSA, 1200 New Jersey Avenue, S.E., Washington, DC 20590. You can also obtain other information about motor vehicle safety from <http://www.safercar.gov>.

(ii) The manufacturer shall specify in the table of contents of the owner's manual the location of the statement in 575.6(a)(2)(i). The heading in the table of contents shall state "Reporting Safety Defects."

REPORTING SAFETY DEFECTS (CANADA):

Vehicles domiciled in Canada that are thought to have a defect that could cause a crash, injury, or death, should immediately be reported to Transport Canada and Tiffin Motorhomes at 1-256-356-8661.

If Transport Canada receives similar complaints, it may open an investigation; if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, Transport Canada cannot become involved in individual problems between you, your dealer, or Tiffin Motorhomes.

To contact Transport Canada, call the Defect Investigation and Recall Division toll-free in Canada at 1-800-333-0510 or 1-819-994-3328 in the Gatineau-Ottawa area or internationally.

By Mail:
Transport Canada – ASFAD
330 Sparks Street
Ottawa, ON K1A0N5

SIGNALEMENT DES DEFAUTS DE SECURITE A TRANSPORT CANADA POUR LES PROPRIETAIRES CANADIENS:

Si vous pensez que votre véhicule présente un défaut lié à la sécurité, vous devez immédiatement en informer Transports Canada (TC) ainsi que Tiffin Motorhomes, Inc. Si Transports Canada reçoit des plaintes similaires, il pourrait ouvrir une enquête à ce sujet. Si le Ministère constate l'existence d'un défaut de sécurité au sein d'un groupe de véhicules, il pourrait ordonner une campagne de rappel et de réparation. Toutefois, Transports Canada ne peut pas intervenir en cas des problèmes individuels entre vous, votre concessionnaire ou Tiffin Motorhomes, Inc. Vous pouvez communiquer avec Transports Canada par l'un des moyens suivants: Par téléphone: 819-994-3328 (région de Gatineau-Ottawa ou international) Numéros sans frais: 1-800-333-0510 (au Canada).

**Par la poste:
Transports Canada – ASFAD
330, rue Sparks
Ottawa (Ontario) K1A 0N5**

Vous pouvez également consulter le site Web de Transports Canada à tc.canada.ca pour remplir en ligne un formulaire de plainte de défauts.

TIFFIN MOTORHOMES LIMITED WARRANTY:

The Tiffin Motorhomes limited warranty is provided to you by your authorized Tiffin Motorhomes dealer during the pre-delivery inspection. When you enquire about the Tiffin Motorhomes warranty, refer to this document. If you require an additional copy of the warranty or other information, contact:

**Tiffin Motorhomes, Inc.
105 2nd St. NW • Red Bay, AL 35582
Phone: 256-356-8661
Email: info@tiffinmotorhomes.com**

Visit www.tiffinmotorhomes.com for access to related materials.

MAJOR EQUIPMENT MANUFACTURERS:

The following list is a compilation of the vendors and suppliers of the major subsystems and components of your motorhome. This list is provided for your convenience and is not a substitution of the literature accompanying the “how to contact us” information supplied by

the vendors and suppliers in your Owner's Information Package. Where appropriate, website information is also provided.

• Aqua-Hot	(800) 685-4298	aquahot.com
• Denso Corporation	(800) 366-1123	globaldenso.com
• Franklin Corporation	(662) 456-7734	service@flexsteel.com
• HWH Corporation	(800) 494-3213	hwhcorp.com
• Onan Corporation	(256) 883-8164	onanindiana.com
• RV Products (Coleman A/C)	(316) 832-3400	airxcel.com
• Precision Circuits Inc.	(630) 240-9832	precisioncircuitsinc.com
• Saf-T-Alert (CO/LP Alarm)	(800) 383-0269	safetalert.com
• Suburban Manufacturing Co.	(423) 775-2131	suburbanmanufacturing.com
• The Dometic Corporation	(219) 294-2017	dometic.com
• Whirlpool	(800) 749 7929	whirlpool.com
• Winegard	(800) 288 8094	help@winegard.com
• LG	(800) 243-0000	lg.com

WARRANTY SERVICE:

All warranty service needs to be completed during the warranty period (basic warranty: 12 months or 12,000 miles). **Tiffin Motorhomes warrants its unitized construction for (5) five years and its laminations for (3) three years.** Any service work performed after the expiration of the Tiffin Motorhomes warranties **WILL NOT** be covered by those warranties.

Exceptions may be made, on an individual basis, to this deadline, because of the unavailability of parts and/or service appointment time where work is to be performed. However, do not rely on the possibility of an exception; schedule any desired in-warranty work before your warranty expires.

OWNER'S INFORMATION PACKAGE:

The Owner's Information Package includes valuable documents about your motorhome and its components and systems. By consulting the booklets and instruction manuals included in the Owner's Information Package, you will learn how to operate, maintain, and troubleshoot these items safely and effectively. The Tiffin Motorhomes Owner's Manual does not cover every possible detail of equipment—standard and/or optional—installed on or in your vehicle.

As with all valuable documentation, keep them in a safe, secure place for your later use and consultation. When you complete and mail to the respective manufacturers any warranty/guaranty registration cards, make a photocopy of both sides of each card before mailing, and keep the photocopy in your permanent records for your motorhome.

CUSTOMER RELATIONS:

To schedule maintenance or service, or order parts, notify your local authorized Tiffin Motorhomes dealership to set up an appointment. If you are unsure of the location of your nearest authorized Tiffin Motorhomes dealership, access the Tiffin Motorhomes website at www.tiffinmotorhomes.com, and then click on the “Locate Dealer” button, and then enter the appropriate search criteria, such as state and retail sales, and then click on the red ball located on the map to find dealer information in that area.

SPECIFICATION LABELS:

There are two main numbers used to identify your motorhome. The Vehicle Identification Number (VIN) is the legal identification of the vehicle. The VIN is the number used by the state for vehicle identification and registration. Additionally, there is a Tiffin serial number (Figure 1-1). This number can be found on the side of the dashboard. A typical sample of this identification label is shown below.



Figure 1-1: Tiffin VIN and Serial Number Label



Figure 1-2: RVIA Label

MANUFACTURED BY:	TIFFIN MOTOR HOMES INC	DATE:	4/18/2014
GVWR 10669	KG(23500 LB)		
GAWR FRONT 3859	KG(8500 LB)	TIRES 26570R19.5	RIMS 19.5X8.25
	COLD INFLATION PRESSURE 758	KPA(110	PSI
GAWR INTERM	KG(15000 LB)	TIRES 26570R19.5	RIMS 19.5X8.25
	COLD INFLATION PRESSURE 758	KPA(110	PSI
GAWR REAR 6810	KG(15000 LB)	TIRES 26570R19.5	RIMS 19.5X8.25
	COLD INFLATION PRESSURE 758	KPA(110	PSI
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON 4/2014			
V.I.N	5VBRC93A4EA115569	TYPE:	MPV

Figure 1-3: Federal Motor Vehicle Safety Standards label located at the entrance.

Other required labels affixed to the motorhome are the Recreational Vehicle Industrial Association (RVIA) Label (Figure 1-2), FMVSS Weight label (Figure 1-3), and the Motorhome Weight Information Label (Figure 1-4). Tiffin Motorhomes, a manufacturer-member of RVIA, has an obligation to disclose the following information to the purchaser of the motorhome:

- An indication of the contents of the motorhome weight label affixed to the motorhome.

to determine that the final weight is within specified limits for the motorhome. To Determine the Final Weight of the Motorhome:

- Drive the motorhome onto the scales so that all wheels are on the scales; this provides the gross vehicle weight (GVW) of the vehicle and can be recorded as such. The GVW must not exceed the GVWR specified for the vehicle.
- Drive the motorhome so that only the rear wheels remain on the scales; this provides the total weight of the motorhome, save for the front axle. This weight must not exceed the total rating of the axles remaining on the scales. The front axle weight is determined by subtracting the weight from the GVW that was obtained in the first step. The result must not exceed the listed front-axle weight rating.

WEIGHT DISTRIBUTION:

To ensure the maximum stability of the motorhome under static (i.e., parked) and dynamic (i.e., moving) conditions, the distribution of the items to be carried and stored within the motorhome and in the storage bays underneath the motorhome must be performed in such a manner as to strive for reasonably even side-to-side and front-to-rear dispersion of the weight of the stored items. This process will ensure that the motorhome is not “lop-sided” in weight distribution (i.e., all the stored weight is not on one side and/or mainly toward the front or the rear). Keeping a center of mass of the motorhome essentially centered on a front-to-rear and side-to-side basis will provide better control of the motorhome when it is in motion.

SAFETY MESSAGES

Note that several labels listed in this manual represent items that need your attention. The Danger, Warning, Caution, and Notice labels alert you to precautions that might help you to avoid damage to your motorhome, its equipment, or your personal safety. Read and follow them carefully.

NOTICE

NOTICE is used to address practices not related to personal injury, or damage to the equipment.



CAUTION

CAUTION indicates a hazardous situation, which, if not avoided, could result in minor or moderate personal injury, or damage to the equipment.



WARNING

WARNING indicates a hazardous situation, which, if not avoided, could result in death or serious personal injury, or damage to the equipment.



DANGER

DANGER indicates a hazardous situation, which, if not avoided, will result in death or serious personal injury, and damage to the equipment.

SAFETY INSTRUCTIONS

Chapter

2

SAFETY CONSIDERATIONS

Before using the motorhome, especially for the first time or after a long period of non-use, read all the instructions in the owner's manual and the chassis-manufacturer's manual thoroughly. There are several safety considerations that you must be aware of and follow while your motorhome is in motion. These safety considerations, as well as others meant to preclude any damage to the motorhome, are listed in this chapter. Besides the driver, it would be helpful for the passengers to be familiar with these safety considerations and precautions too.



WARNING

Before your motorhome is to be towed, be sure that you have read the entire Owner's Manual and that you fully understand the equipment on your motorhome and how to use that equipment safely.

GENERAL WARNINGS

In general, there are several "common-sense" safety precautions that must be taken every time the motorhome is to be used on the road. These precautions include:

- Only seats with seat belts must be used while the motorhome is in motion; the seat belts should be worn by all people (driver and passengers) in the motorhome at that time.
- While the motorhome is moving, lock all seats in the forward-facing position to provide maximum safety for the users.
- While the motorhome is moving, no one (e.g., young children) inside should ever stand or kneel on the seats.
- In most states, it is the law that seat belts must be used (fastened snugly about the chest and hip areas), anytime the motorhome is in motion, to provide desired protection in the event of a crash.
- Any fire extinguishers must be inspected monthly to ensure that each extinguisher is properly charged and ready for operation.
- Any smoke and/or carbon monoxide (CO)/liquid propane (LP) alarms must be regularly inspected and tested. If it is being used for the first time, the smoke and/or CO/LP alarm must be properly activated, and fresh batteries installed before the motorhome is placed into service. Never sleep in a motorhome not having functional smoke and/or CO/LP alarms.
- While the motorhome is moving, the sleeping facilities are not to be used.

- Be sure to be familiar with all emergency exits (doors, emergency window). Do not use the emergency window as a routine exit; this is to be used for emergency purposes only.
- Movement inside the motorhome should be minimized while the motorhome is in motion.
- Never leave the driver's seat unattended while the motorhome is in motion.

PRE-DEPARTURE CHECKLIST

For your continued safety and convenience, the following is a representative “checklist” designed to ensure your safety while driving:

- ✓ Clean all windows, mirrors, and light lenses (front, back, and sides) to ensure that you can “see” and “be seen.”
- ✓ Reposition any mirrors or other fixtures to provide an unobstructed view (front, back, and sides) from the driver's seat.
- ✓ Remove or secure all loose fixtures (e.g., awnings, flags, antennas, portable lights) to keep them from falling from the motorhome when the vehicle is in motion.
- ✓ Make a “walk-around” visual inspection of the motorhome to note any irregularities (e.g., loose trim) or problems (e.g., low tires), correct noted problems accordingly.
- ✓ Check all exterior storage-compartment and generator-compartment doors to make sure that they are properly latched. If need be, check inside all exterior compartments to make sure that all cargo and equipment are properly secured so that they do not work loose and become hazards during sudden starts and stops.
- ✓ Check the tires for proper inflation (i.e., cold-inflation pressure: 100 psi). If the motorhome has not been used, make sure that the “cold-inflation” pressure is maintained. If the motorhome has recently been used, make sure that the “hot inflation” pressure (see the tire-manufacturer's literature to determine appropriate “hot inflation” pressure) is maintained on each axle. Not all axles require the same tire pressure.
- ✓ Examine wheel lug nuts to ensure their proper tightness. If any lug nuts are found to be loose, first check the fit of the wheel to the hub to make sure the wheel is mounted properly. An improperly mounted wheel will produce a “wobbly” wheel when the motorhome is in motion.
- ✓ Before starting the motorhome engine, make sure all lines (e.g., water, sewer) and electrical power cords are disconnected and properly stowed.



- ✓ Ensure that the leveling jacks are in the “travel” position and antennas are securely docked.
- ✓ Check all fluid levels (e.g., engine oil, transmission fluid, coolant, power-steering fluid, brake fluid, battery fluid [if applicable], windshield-washer solvent) to ensure that correct levels are maintained. Fill any low reservoirs, as needed.
- ✓ DO NOT SUBSTITUTE any other fluids for specified oils, transmission fluid, brake fluid, or other hydraulic fluid substitutions are not acceptable and can void warranties.
- ✓ After entering the motorhome, make sure that the electrically actuated, retractable step has properly operated to retract the step fully before starting the engine of the motorhome.
- ✓ Check all interior doors (e.g., shower, microwave, refrigerator, etc.) to ensure that they are locked and/or secure. Make sure that all large items are stored away and secure (e.g., coffee pots, corning ware, etc.).

DRIVING SAFETY

Various adjustments must be made to ensure the driver's comfort and the safety of the motorhome before starting and moving the motorhome; these include:

1. Do not attempt to adjust the driver's seat while the vehicle is moving.
2. Do not adjust the tilt steering while the vehicle is moving.
3. The driver must be familiar with all gauges, instruments, switches, and indicators on the instrument panel before driving as shown in Figure 2-1.
4. Do not operate the cruise-control function during any extreme weather situations (e.g., snow, ice, sleet, heavy rain), when road conditions are hazardous (icy, snowy, winding roads, city traffic), when a constant speed of the motorhome is not possible, or if traffic conditions do not warrant such.
5. Avoid driving the motorhome through any standing water. If deep enough, such water can wet the brake pads and cause fading of the brakes (i.e., loss of braking power) and lead to excessive sliding or pulling to one side or the other.
6. Know the limits of operation of the motorhome. Do not try to achieve excessive speeds, climb overly steep hills, traverse overly long grades, attempt to use as an "off-the-road" (OTR), rapidly switch lanes, or rapidly accelerate or decelerate the motorhome. When in doubt about the handling characteristics of the motorhome, consult your chassis manual for information.



Figure 2-1: Driver's side Dashboard and Instrument Console



CAUTION

DO NOT overextend either shade as this might block the view of the road.



WARNING

Liquid propane (LP) gas containers, gasoline, or other flammable liquids must not be placed or stored inside the motorhome because a fire or explosion might occur. LP gas containers (Figure 2-2) are equipped with safety valves that might relieve excess pressure by discharging gas into the atmosphere—any containment of that vented LP gas constitutes an explosive hazard.

7. The solar shade is operated by pressing the “Solar Shade” toggle switch on the driver’s console. Toggle the switch to lower or raise the shade. The night shade is operated by pressing the “Night Shade” toggle switch. These are time delay switches; see Figure 2-1.
8. NEVER drive the vehicle with a slide-out room extended.



DANGER

All pilot lights, appliances, and their ignitors must be turned OFF before refueling the motor fuel tanks or propane containers. A failure to comply could result in serious injury or death.

FUELS FOR THE MOTORHOME:

The Allegro is designed to use gasoline only:

- Anytime the motor fuel is to be filled, turn OFF the motorhome engine, all pilot lights, and appliances.
- DO NOT SMOKE when refilling the fuel tank as shown in Figure 2-2. NEVER use an open flame to test for LP gas leaks or to examine the fluid levels in the fuel tanks. After filling any LP system, immediately replace and secure all protective covers and caps.
- After closing the LP valve, close and securely latch the LP door to prevent unintentional access or damage.



WARNING

DO NOT FILL the LP container to more than 80 percent of capacity.

- NEVER connect natural gas to the LP gas system—LP gas and natural gas are not interchangeable.
- When lighting range burners, do not turn burner controls ON and allow the gas to escape before lighting.

NEVER use any other “burning” equipment (e.g., charcoal grills, wood stoves, butane lights, propane lights) inside the motorhome. Doing so may cause fires and asphyxiation.



Figure 2-2: LP Tanks and Regulators



WARNING

Any portable fuel-burning equipment (e.g., charcoal, propane, butane, wood) must not be used inside the motorhome. Any use of such equipment inside the motorhome might readily cause fires and/or asphyxiation by carbon monoxide poisoning. Moreover, such unauthorized use will probably invalidate your motorhome insurance policy.

LIQUID PROPANE (LP) GAS SYSTEM:

Check the propane gas system for leaks yearly or as necessary. If you smell propane within the motorhome, perform the following:

- Extinguish any open flames, pilot lights, and all smoking materials.
- Do not touch electrical switches.
- Shut off the gas supply at the tank valve or gas supply connection.
- Open doors, windows, and other ventilating openings.

Leave the area until the odor clears. Have the propane system checked and leakage source corrected immediately.



WARNING

A failure to comply with the above guidance could result in serious injury or death.

A WARNING label such as the following is located near the LP gas container. Any overfilling of the LP gas containers can result in uncontrolled gas flow—a prime condition for a fire or explosion.

The LP tank (Figure 2-2) must be filled to only 80 percent of its capacity; the remainder of the cylinder space is an air space to contain expansion of the liquid when subjected to varying ambient-temperature conditions.

Filling more than 80 percent of the liquid volume of the container reduces the air space and, thus, creates a condition for possible over-pressurization of the container.

All LP appliances in the motorhome have been approved for use in motorhomes by a nationally recognized testing laboratory (i.e., UL and CSA certified). When properly used, LP gas is a clean burning fuel, which can be dependably used. The LP container contains liquid propane under high pressure.

The liquid, when it passes through the tank valve to a lower pressure, vaporizes into a gas, and then passes through a regulator to maintain constant pressure. This gas, then, is the actual fuel distributed through the LP-gas manifold system to the LP-based appliances used in the motorhome.

LP-appliance lighting problems are typically caused by an improperly adjusted gas regulator. NEVER attempt to adjust or reset the gas regulator yourself. An authorized service technician is needed to make these adjustments. As a good preventive-maintenance activity, the regulator should be checked annually by a service technician and before every extended trip.



WARNING

When the motorhome is not in use, be sure to close the main LP gas valve at the tank. When the LP gas tank is to be refilled, close the main valve to preclude the chance of pilot lights possibly igniting fumes from the LP fuel. As some LP-gas appliances (e.g., refrigerator, furnace, water heater) have Direct Spark Ignition (DSI) systems, it is very important that these appliances be turned off when the LP gas is off. The DSI boards will continue to work (i.e., emit an ignition spark) even when there is no LP gas available.

Even though the LP-gas system is leak-checked and verified at the factory at the time of manufacture, normal usage (travel vibrations, etc.) could loosen the fittings. Consequently, it is wise to check the gas fittings periodically for leak tightness.

You can wipe some leak-detector solution (e.g., a “liquid-soap”-like solution) on all the fittings, connections, and junctures when the system is under pressure. Should there be any leaks, small bubbles will appear at any leak sites.

Generally, loose fittings can be tightened to stop the leaks. If this process does not work, then you must shut off the main gas valve at the LP cylinders and immediately consult an authorized service technician to determine what repairs are necessary. Leaks may also be detected by noting a sulphurous odor (i.e., rotten eggs). DO NOT search for a leak by using a match or open flame.

LP GAS REGULATOR:

The LP gas regulator (Figure 2-3) is the most critical element of the LP-gas distribution system. The regulator converts the high-pressure LP gas from the tank into a reduced-pressure LP-gas supply suitable for use in the various appliances in the motorhome.

You must regularly inspect the regulator system. If any damage or corrosion is noted, contact an authorized service technician to inspect and repair or replace the regulator.

Do not attempt to adjust the regulator yourself; the regulator has been pre-set at the factory. Only a qualified LP service technician using specialized equipment should adjust the regulator.

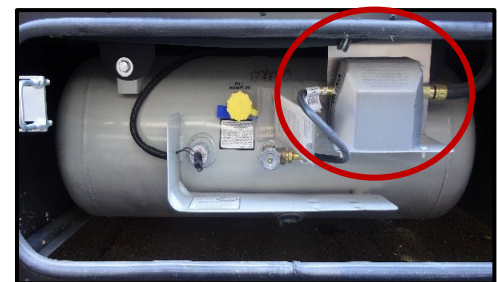


Figure 2-3: LP Gas Regulators

LP DISTRIBUTION SYSTEM:

The primary LP distribution system in the motorhome is a steel manifold located underneath the motorhome. The secondary distribution lines running from this main distribution system are usually reinforced rubber supply lines.

If any of the gas lines break, do not attempt to splice them—always run new lines to maintain the safety of the motorhome. Tiffin Motorhomes recommends that only qualified service technicians perform this work.

Remember, the main valve at the LP gas tank must be closed whenever any gas appliance is to be installed, removed, or serviced—this process prevents LP gas leakage, which could result in a possible harmful explosion. If the odor of LP gas is ever detected, immediately discontinue use of any gas appliances and seek the services of a qualified service technician.



WARNING

The LP gas distribution system in your motorhome is designed for liquefied petroleum (LP) gas ONLY. DO NOT attempt to connect and use any natural gas or butane gas system with this LP gas system.

RECOMMENDED PRACTICES:

The following practices are recommended to ensure continued safety and reliability of the LP gas system. These are representative, and not exhaustive. In all cases, use common sense in the use of the LP system:

- Before any refueling operation of the LP gas system, shut off all the pilot lights.
- Visually inspect the LP fill valve before any refueling operation for foreign materials or debris; remove, as necessary, to ensure a leak-tight connection.
- NEVER, under any circumstances, check for LP gas leaks with any type of open flame; doing so would probably cause an explosion and subsequent fire.
- Annually and before any major trips, visually inspect the entire LP gas distribution system.

Should problems be noted, seek the services of a qualified service technician to make necessary repairs and perform any maintenance.

CARBON MONOXIDE WARNING:



WARNING

Avoid inhaling exhaust gases as they contain carbon monoxide, which is a colorless, odorless, and poisonous gas. Serious illness, injury, or death can result.

A properly maintained engine exhaust and ventilation system are the best way to protect against carbon monoxide's entry into the vehicle. Tiffin Motorhomes recommends that the exhaust system and body be inspected by a qualified motorhome service center:

- Each time the vehicle is serviced for an oil change.
- Whenever a change in the sound of the exhaust system is noticed.
- Whenever the exhaust system, underbody, or rear of the vehicle is damaged.

To allow proper operation of the vehicle's ventilation system, always keep the front ventilation inlet grill clear of obstructions. Do not occupy a parked vehicle with the engine running for

an extended time, and do not run the engine in confined areas, such as a garage. The Allegro is equipped with a combination CO/Gas Alarm (Figure 2-4). This alarm combines a single compact system that detects both Carbon Monoxide (CO) and Propane (LPG) gas. It will detect carbon monoxide gas from any combustion source such as the furnace, oven/range, water heater, refrigerator, chassis engine, and generator engine.

CO/LP GAS DETECTOR:



Figure 2-4: Carbon Monoxide/LP Gas Detector

Since LP gas is denser than air, the LP gas will naturally settle to the lowest point in an enclosed space. In the motorhome, this would be the floor. Because of this, the CO/LP gas detector (Figure 2-4) is necessarily mounted close to the floor. To activate the CO/LP-gas sensor on this detector for the first time, remove the sensor activation strip, if it was not removed during the pre-delivery inspection. If the alarm persists in re-arming and giving further alarms, ventilate the motorhome by opening the doors

and windows, and then check for possible LP gas leaks. If the leak cannot be readily found after the ventilation process is concluded, then close the main valve to the LP tank, turn OFF all gas appliances, shut all the doors and windows, and then take the motorhome to a qualified service technician.

The CO/LP gas detector is a powerful combined alarm that detects both Carbon Monoxide (CO) and explosive gases, such as Propane (LPG) and Methane (Natural Gas). This detector uses the latest microprocessor technology combined with two electronic self-cleaning sensors that operate independently of each other. The combined unit can detect both CO and explosive gases simultaneously.

Carbon monoxide (CO) is a colorless, odorless, tasteless gas which, when breathed, bonds to the hemoglobin in the red blood cells and, thus, drastically reduces or blocks the transfer of oxygen from the lungs to the rest of the body. In enough concentrations, CO kills by asphyxiation. In lesser amounts, CO makes the victim groggy, lethargic, and unable to think clearly or quickly.

CO is one of the products of combustion for many materials including petroleum-based products (e.g., gasoline, diesel fuel, propane, butane, etc.). Since many of the appliances and the engines associated with the motorhome produce CO in their normal operations, it is necessary to ensure that CO levels do not rise to dangerous levels within the motorhome. In sufficiently high concentrations, CO can kill in minutes. The people most susceptible to CO poisoning are unborn babies, small children, pregnant women, senior citizens, and people with cardiovascular or respiratory problems.

Consequently, it is prudent to check the CO monitor regularly for normal operation and to remain aware of the symptoms of CO poisoning, which include dizziness, nausea, vomiting,



DANGER

Never sleep in a motorhome when the engine is running—engine exhaust fumes could enter the motorhome and cause disability or death. Regularly check the exhaust system to note any leakage sites and, if found, discontinue use of the motorhome until they are repaired by a competent, qualified service technician. Do not attempt repairs on the exhaust system yourself and do not modify (temporarily or permanently) the exhaust system at all.

muscular twitching, throbbing in the temples, incoherent thinking and speech, weakness, sleepiness, and intense headaches. If any of these symptoms are experienced in the motorhome, IMMEDIATELY evacuate the motorhome and seek medical help. Shut down the motorhome and do not attempt to operate it again until the sources of the CO are located and fixed.



DANGER

Carbon monoxide gas—derived from products of combustion of diesel fuel, LP gas, and other petroleum-based products—is a deadly gas that can kill motorhome occupants, if allowed to accumulate in enough concentration. Ensure that all engine operations are not restricted tailpipes and exhaust ports should not be blocked or restricted in any way. Additionally, any accumulation of exhaust gases outside or underneath the vehicle must be avoided as it might enter the motorhome through windows or vents—be careful of how and where the motorhome is parked to avoid such conditions. Regularly monitor outside conditions to ensure that all exhaust gases can readily be dissipated and not enter the motorhome inadvertently.

FIRE SAFETY AND THE FIRE EXTINGUISHER:

As with any enclosed system containing the three required conditions for fire (i.e., combustible materials, oxygen, and ignition sources), there will be the possibility of fire inside the motorhome. Tiffin Motorhomes has taken every precaution and design practice to minimize or negate this possibility, but the final determination rests with the owner and user of the motorhome. Hence, the owners, users, and their guests must be aware of basic fire-safety practices and procedures, and those features that Tiffin Motorhomes has provided for fire safety. The motorhome is equipped with a fire extinguisher located in the entrance stairwell (Figure 2-5). The extinguisher is rated as both Class B (i.e., grease, gasoline, diesel fuel, flammable liquids) and Class C (i.e., electrical) services.

Read and understand the accompanying owner's manual on the extinguisher (found in your Owner's Information Package) and remember the location of the extinguisher. These types of fire extinguishers are pressurized mechanical devices and require that appropriate care be used in their safe storage and use. The owner's manual will provide necessary guidance for the proper storage, handling, and use of the extinguishers.

Prudent preventive maintenance suggests monthly inspection of any fire extinguisher to ensure that it is sufficiently pressurized (i.e., the needle on the gauge is in the "normal" zone) and that the mechanical components are not blocked in any way.



Figure 2-5:
Fire Extinguisher

DO NOT test a fire extinguisher by partially discharging the unit—this will cause a loss of pressure and might lodge some fire-retardant materials in the valve mechanism and cause the extinguisher to continue to vent slowly down to zero pressure. If an extinguisher is ever partially used, continue its use until the unit is completely discharged. Then, have the fire extinguisher fully recharged at an appropriate service center (call any fire department for information on having an extinguisher recharged in that locality).

DO NOT wait to recharge an empty fire extinguisher; you will never know when it might be needed.

Should a fire occur inside or around the motorhome, evacuate the motorhome quickly and calmly—do not panic. In the event of heavy smoke or extensive flames, keep low (crawl if you must), and make your way to the nearest exit (door, emergency window) and leave. If the fire involves a fuel source (e.g., diesel fuel, LP gas), consider the probability of an explosion and move sufficiently far away to minimize personal harm. If possible, immediately place a call to the local fire department (or ask someone nearby to do so) to report the fire. Consider the cause and the consequences of the fire and the risks associated with possibly fighting the fire yourself before trying to extinguish it. **DO NOT expose yourself or others to unnecessary danger.**

SMOKE DETECTOR:




Figure 2-6: Smoke
Detector

The motorhome is equipped with a battery-operated smoke detector (Figure 2-6) located on the ceiling in the living area of the motorhome.

The smoke detector must be tested on a weekly basis, before each trip, and after any period of storage of the motorhome.

If a low-battery condition is noted or the alarm "chirps" to indicate a low-battery condition, immediately replace the battery. Tiffin Motorhomes recommends that you keep replacement batteries in the motorhome for any in-transit replacements so that the smoke-alarm capability is never compromised.

DO NOT disable the smoke detector for any transient, false alarm (e.g., cooking smoke, dusty furnace, tobacco smoke). Ventilate the motorhome with fresh air and the alarm will reset on its own.

ELECTRICAL:

- Careless handling of electrical components can be fatal. Never touch or use electrical components or appliances while feet are bare, hands are wet or standing in water.
- Improper grounding of the vehicle can cause personal injury.
- Do not attach an extension cord to the utility power cord.
- Do not use any electrical device that has had the ground pin removed.
- Avoid overloading electrical circuits. Replace fuses or circuit breakers with those of the same size and amperage rating only. NEVER use a higher rated fuse or breaker.

LOADING:

- Store or secure all loose items inside the motorhome before traveling. Possible overlooked items such as canned goods or small appliances on the countertop, cooking pans on the range, or freestanding furniture can become dangerous projectiles during a sudden stop.
- Be aware of GVWR, GAWR, and individual load limit on each tire or set of duals.
- Never load the motorhome more than the gross vehicle weight rating or the gross axle weight rating for either axle.

MAINTENANCE:

- Do not remove the radiator cap while the engine and radiator are still hot. Always check the coolant level visually using the see-through coolant reservoir.
- NEVER get beneath a vehicle that is held up by a jack only.
- Do not mix different construction types of tires on the vehicle. Replace tires with the exact size, type, and load range.

EMERGENCY EXITS:

The living areas of the motorhome are equipped with emergency exit windows (Figure 2-7 and Figure 2-8). These windows are designed for emergency exits when it is not practical to exit by the door, which also is an emergency exiting the front of the motorhome. These windows are readily noticeable by their red handles and the red EXIT label on the windows.

To use these windows as emergency exits, lift the handle and push outward on the window. As required, the window can be closed by pulling the window inward and then lowering the handle to latch the window back in place. When the motorhome is to be parked, note where these windows will be, so that the exits will not be blocked (e.g., against a tree, pole, or wall).



Figure 2-8: Emergency Exit



Figure 2-8: Emergency Exit Latch

PARKING PROCEDURES:

To park the motorhome in any unfamiliar terrain, examine the site for surface irregularities, slopes, or inclines, and other items such as stumps, rocks, or external connections for power/water/sewage, and examine the area immediately above the parking site for obstructions like tree branches and limbs, signs, and overhead wiring.

If the motorhome is to be backed into the parking area, try to have that site on the driver's left-hand side, as this will allow the driver to watch the rear of the motorhome. Back up slowly and use the side mirrors and the back-up camera as a guide or, better yet, have another person outside provide guidance to help park the motorhome.

When the motorhome is finally situated, shift the transmission into the park, set the foot-operated park brake, and then turn OFF the engine. Activate the hydraulic leveling system to level and stabilize the motorhome.

If the motorhome is to be powered externally, connect the 120 VAC power to the motorhome. If the motorhome uses LP gas, turn ON the LP gas valve at the LP tank. Connect the freshwater supply and sanitize the water systems (see Chapter 13) as needed. Connect the waste drain hose to the external sewer hook-up. Start the refrigerator, water heater, and furnace, as warranted. Light the oven pilot light, as needed. Certain appliances, such as the refrigerator, will not work properly if the motorhome is not level, so be sure to complete the motorhome-leveling process before activating any of the appliances.

TOWING HITCH:

The motorhome is fully capable of towing typical motor vehicles. The Allegro Open Road is equipped with a 5,000-pound towing hitch (Figure 2-9) and associated wiring connector. The towing hitch features a standard 7 pin wiring connector. If desired, a trailer brake actuator can be added. The plug for the actuator is located to the left of the steering column, underneath the dash.



Figure 2-9: Towing Hitch

The motorhome is capable of towing light loads, and instructions are in the chassis manufacturer's literature in the Owner's Information Package provided with the motorhome. The total weight of the motorhome and any vehicle towed by that motorhome must not exceed the Gross Combined Weight Rating (GCWR).

The tongue weight must not exceed 10 percent of the towing capacity. Information related to the motorhome weight and GCWR can be found on a sticker inside the motorhome closet. Any vehicle towed by the motorhome must have adequate active braking.

Tiffin Motorhomes does not recommend using any type of hydraulic towing lift that attaches to the rear of the motorhome designed to carry motorcycles, scooters, golf carts, etc.

NOTICE

When the motorhome is being weighed, account for passengers and their locations in the motorhome.

HEATING & AIR CONDITIONING

Chapter

3

FURNACE:

NOTICE

NEVER attempt to modify the furnace. Doing so might cause fire, explosion, carbon monoxide poisoning, or asphyxiation. If the furnace is malfunctioning, immediately shut the unit OFF and call a trained service technician as soon as possible.

The motorhome is equipped with a forced-air furnace fueled by LP gas. The furnace is controlled by the wall-mounted Spyder Controls System (Figure 3-1), located inside the motorhome in the hall outside the master bedroom. Among other functions, this controls both the heating and air conditioning for the motorhome.

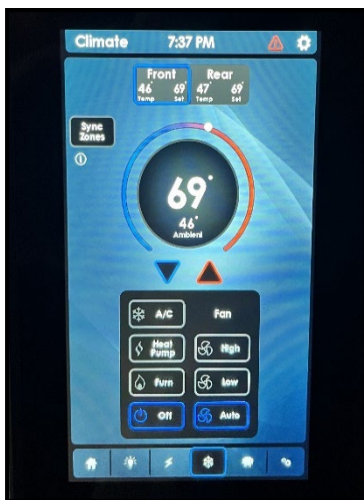


Figure 3-1: Spyder Controls System

In the gas-heating mode, the furnace heats air, which, in turn, is circulated through ductwork on the floor of the motorhome. If any obstructions block the floor vents or air-return register, the furnace will not function properly. Any items stored under the cabinets must be carefully stowed to prevent damaging or crushing the furnace ducting or blocking the warm-air return.

NOTE: When a furnace is being used for the first time, there may be an initial “burn-off” of manufacturing compounds or residues left on the heat exchanger or in the ductwork, which could produce odors, fumes, and possibly some smoke. This is normal and should not cause concern, unless it persists for an excessive amount of time.

To minimize the after-effects of this “burn-off” process, the initial use of the furnace must be done with all the doors and windows open to permit normal air circulation to dissipate these odors and fumes.

For routine operation of the furnace, set the thermostat to the desired temperature setting and then turn the thermostat to gas heat. In about a minute, the furnace will begin to operate, and warm or hot air will come through the ductwork.

To shut down the furnace, turn the thermostat to the OFF position. Even though the thermostat might be turned OFF, the furnace system will continue to run for about a minute or so to permit a gradual cool-down of the heating system, which is normal.

On a regular basis, thoroughly clean the complete furnace and air-tube passageways to remove dust, lint, and any other possible obstructions. Leak-test the entire LP gas system at least annually. Also, check and clean the air-blower system annually.

NOTICE

Be cautious when washing the exterior of the motorhome. Water should never be sprayed directly into the furnace vent. Should any water be forced beyond the rain baffles into the furnace vent, the furnace might rust, which, in turn, might cause improper combustion and produce unwanted by-products of combustion.

Any access hatches to the furnace are for authorized service personnel only, as there are no user-serviceable parts on the furnace. Accordingly, do not attempt to tamper with the interior of the furnace. Before the beginning of each travel season, the furnace must be thoroughly cleaned and inspected. Any obstructions, debris, or lint, which might obstruct free airflow or impede the operation of the air circulation system, must be removed. For example, accumulated dust or lint could possibly obstruct the orifices for the pilot light or might accumulate on the blower blades and unbalance the operation of the blower. Additionally, any debris in the ductwork, when heated by the furnace, could emit unpleasant odors or possibly become a fire hazard.

The furnace system must be periodically cleaned. Annual cleaning is recommended unless the motorhome is subjected to dust levels significantly greater than average, in which case more frequent cleaning is recommended. The Owner's Information Package provides recommended cleaning tips and procedures. When needed, more thorough cleaning must be performed by a qualified service technician.

AIR CONDITIONING SYSTEM:

The factory-installed air-conditioning system is designed for 120 VAC power supplied either from the external power cord or from the generator. For the best cooling scenarios, park the motorhome in a shaded location whenever possible and close drapes on the windows exposed to direct sunlight.

NOTICE

The air conditioning system is the major consumption device of electrical power in the motorhome. When this system is being used in an RV park, cumulative use of these air-conditioning systems by the resident vehicles can create a bigger demand for electrical power than is available. Accordingly, at times, a "brown-out" condition might arise. This is when the AC voltage normally available drops to a lesser value (e.g., 10-20% below normal or more).

"Brown-out" conditions cause appliances to draw greater currents to make up for the reduced voltage; thereby causing circuit breakers to trip or fuses to blow. Under such conditions, your own motorhome is not at fault; reset your breakers and/or replace your fuses. Should such conditions continue, reduce the electrical load (in this case, turn OFF the air conditioning system for a while) or start the electrical generator.

The air-conditioned, cooled air is emitted through the vents (Figure 3-2 to Figure 3-4), which are located in the roof throughout the entire coach along the passenger side. The return air vents run parallel, front to back, on the ceiling along the driver's side of the coach. The return vents are similar to the air conditioning vents, but they contain foam filters that keep dust from flowing back through the air conditioning system. The return filters can be easily removed and cleaned with warm water and a mild cleaning solution. To remove the filter, pull the vent down and lift the filter from inside the opening.



Figure 3-2: Round Vent Filter



Figure 3-3: Round Vent Filter



Figure 3-4: Round Air Vent

THERMOSTAT ON SPYDER CONTROLS SYSTEM:

The following is an overview of how best to use the thermostat on the Spyder Controls System (Figure 3-5). For more detailed instructions, refer to the thermostat literature in the Owner's Information Package.

- Push the SNOW FLAKE icon on the Spyder Controls System. This will bring up a touch screen to select the desired function (e.g., A/C, HEAT PUMP, FURN, or OFF).

NOTE: In the A/C mode, there will be a delay of several minutes before the refrigerant in the air-conditioning system begins to cool the motorhome, as the compressor is on a time delay circuit and it must also cool the ductwork to the vents first.

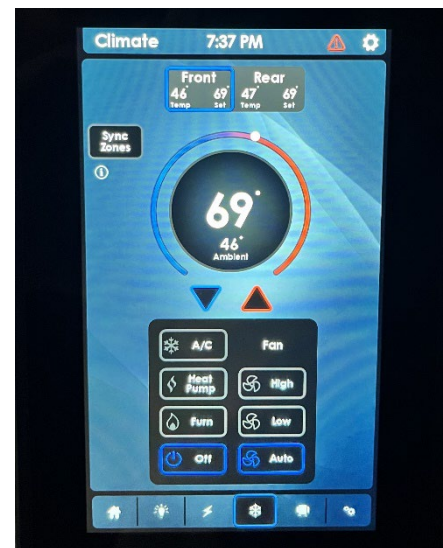


Figure 3-5: Spyder Thermostat Controls

- Select the Fan Mode operation (AUTO) or set the Fan Speed operation (LOW or HIGH) to select the fan speed desired.
- Press the Up or Down buttons to set the desired temperature for the motorhome.

NOTE: When the fan is on AUTO mode, the fan will turn on and off when the temperature reaches the desired setting. When the fan is on LOW or HIGH mode, it will continue to run even though the compressor cycles on and off when it reaches the desired temperature.

If the motorhome temporarily loses its 110V power, the air conditioning system will resume operation at its last programmed setting once power is restored.

If 12V power is lost to the thermostat, it will automatically reset to 72 degrees once power is restored.

NOTE: There is a thermostat control for each air conditioning unit.

HEAT PUMP CONTROLS:

To activate the optional heat pump, set the thermostat to the HEAT PUMP mode and select the desired temperature.

NOTE: If the setting on the thermostat and the room temperature is more than five degrees apart, the gas furnace will automatically turn ON with the heat pump. Once the room temperature reaches the desired level specified on the thermostat setting, the furnace will be cut off and the heat pump will maintain the heating of the coach.

NOTE: The heat pump is controlled by the thermostat located in the living area of the motorhome.

If the external temperature falls to 45 degrees Fahrenheit, the heat pump will become inoperative, and the gas furnace will begin to operate automatically.

LP GAS SYSTEM

Chapter

4

LP GAS TANK FILLING & MONITORING:

The LP gas tank associated with the motorhome must never be filled to more than 80 percent of its total capacity. Filling should always be done only when the motorhome is level. If the motorhome is not level, the tank might be overfilled (i.e., more than 80 percent of capacity) and, thus, present an unsafe situation. When the tank is full (80% of capacity) the Spyder Control System Display Screen (Figure 4-1) will indicate that the tank is “FULL”. For reference, there is one vertical gauge column monitoring the approximate amount of LP gas in the tank.

NOTICE

When an LP gas regulator is installed or re-installed, the regulator must always be installed with the gas diaphragm vent facing downwards. For more information, consult the manufacturer’s literature in your Owner’s information package that came with the motorhome. Always keep the main valve to the LP gas tank closed when the system is not in use. When the LP tank is empty, keep the main valve closed until refilling is to be performed—this process will keep any moisture-laden air from back-flowing into the gas system and trapping unwanted moisture in the LP gas tank. If an empty LP gas tank has been exposed to the atmosphere for an extended time, let a qualified service technician purge the tank before its next filling operation.

WARNING

DO NOT operate the LP gas system with any faulty component in place.

NOTICE

If a gas leak is noted or suspected, turn OFF the main valve and keep the LP gas system OFF until that system is inspected by a qualified service technician as soon as possible. Do not delay in addressing any possible gas leaks with appropriate service because of the inherent hazards to safety.



Figure 4-1: Spyder
LP Gas Tank
Monitor

MAJOR APPLIANCES

Chapter

5

RESIDENTIAL REFRIGERATOR:

The motorhome contains a 120-volt style residential refrigerator (Figure 5-1), which is powered from an outside source or from the unit's generator or inverter, which uses a 12-volt battery power supply.

This unit operates as most home refrigerators do.

NOTE: While traveling, the refrigerator will be powered by the inverter.

For further operating and maintenance instructions, refer to the operating booklet found in the Owner's Information Package.

NOTE: While traveling, the 12 V battery is charged by the engine alternator.

The inverter must be ON for the residential electric refrigerator to operate, if not connected to shore power, or if the generator is not running.

ICE MAKER:

Your icemaker (Figure 5-2) is equipped with an automatic shut off. As ice is made, the ice cubes will fill the storage tray, raising the shutoff arm to the OFF position. Do not force the wire the shut off arm up or down.

- To turn ON the icemaker, lower the wire shut off arm.
- To turn OFF the icemaker, lift the wire shutoff arm to the OFF position (arm up) until it clicks.

NOTE: The icemaker must have RV antifreeze cycled through it for proper winterization.



Figure 5-1:
Residential Refrigerator



Figure 5-2: Ice Maker in the
OFF Position

MICROWAVE OVEN:



Figure 5-3: Microwave Range

The motorhome contains a convection microwave (Figure 5-3). The microwave range operates on 120-volt AC electrical power, supplied either by the external electrical hookup or by the onboard electrical generator in the motorhome.

Touchpad controls are used for operating the convection microwave (i.e., cooking temperature, mode, power level, and cooking time). For basic operating instructions, care, and maintenance for the proper use of the microwave, refer to the specific manual in the Owner's Information Package.

AIR FILTRATION FAN:



Figure 5-4: Air Filtration Fan

In the motorhome, the “exhaust” or air filtration fan (Figure 5-4) is built into the microwave range and its function is to filter the air and exhaust to the outside. The air filtration fan must be used whenever cooking is performed to filter any airborne cooking residues and heated air. The filtration system can be used as supplemental filtration of other odors and gases including tobacco smoke, candle fumes, and related vapors. It contains filters, which can be removed and cleaned or replaced to ensure normal operation. Consult the owner's manual contained in the Owner's Information Package for more information.



WARNING

Portable fuel burning equipment, including wood and charcoal grills and stoves, should **NEVER** be used inside the motorhome. The use of this equipment inside the coach can cause fire or asphyxiation and could result in serious injury or death.

COOKTOP AND OPTIONAL OVEN:

The Allegro might be equipped with a standard recessed three-burner range (Figure 5-5) or an optional, three-burner, recessed cooktop.

TO LIGHT THE OVEN FOR THE FIRST TIME:

Light the oven (Figure 5-6) by turning the gas control knobs to the OFF position. Check that the main inlet gas valve is OPEN. KEEP THE OVEN DOOR OPEN for the full ignition process to view the pilot and burner until lighted. Push and turn the gas control knob counter clockwise to position until the pilot lights; you will hear a small clicking noise. If ignition does not occur in 5 seconds, turn the gas control knob off, wait for 2 minutes and repeat the lighting procedure. Once the pilot flame is lighted, continue to hold the oven control knob in for 10-15 seconds, then release the knob and verify that the pilot stays lighted. After the pilot flame is ignited and the control knob is released, then turn the control knob counter clockwise to the required temperature setting. Within 20 seconds of the pilot flame being lighted, the main burner flame will automatically ignite, confirm with a visual inspection before closing the oven door.

To shut off your oven:

Push the oven control knob and rotate clockwise to the OFF position. Extinguish all pilots when refueling or traveling. The fan will continue to run for 10-15 minutes after turning off the oven. Do not attempt to adjust the oven pilot light, as it has been factory adjusted, and factory set. To extinguish the oven pilot light when use of the oven is concluded, push inwards on the oven control knob and turn that knob clockwise to the OFF position.

TO OPERATE THE THREE-BURNER COOKTOP:

Ensure all cooktop knobs are turned clockwise to the OFF position. Push and turn cooktop knob 90 degrees counter clockwise to the large flame icon. Push down on the cooktop knob and press the spark ignition button together to light the burner; continue to hold down the cooktop knob for 10-15 seconds to disable the safety cut off. The cooktop is fitted with a burner safety cut off, if a flame is not present, the gas supply will automatically shut off. If no spark is present when pressing the ignitor, check or replace the AA battery. For your safety, never attempt to operate the cooktop with battery power exhausted.



Figure 5-5: Recessed Three-Burner Range



Figure 5-6: LP Gas Range



DANGER

IF YOU SMELL GAS, YOU SHOULD IMMEDIATELY:

Extinguish any open flames, pilot lights, and all smoking materials. Do not touch or operate any electrical appliances or switches. Immediately shut off the gas supply at the main tank valve or supply connection. Open doors, windows, and other ventilation openings. Exit the RV to allow entrapped LP gas to dissipate. Have the LP gas system checked to locate and fix the sources of the leakage.



DANGER

All LP gas-operated appliances in the motorhome will consume oxygen. If the motorhome is totally closed during such operation, the oxygen level might be reduced, and the associated carbon monoxide level might be increased thereby causing possible harm or death to the occupants through asphyxiation. Always use these appliances with proper ventilation.



WARNING

DO NOT USE cooking appliances as a heating source for the motorhome. Cooking appliances require fresh air for safe operation. Before using any cooking appliance, make sure that an overhead vent or window is open and/or turn **ON** an exhaust fan. **DO NOT** place stove covers on the cooktop until it is cooled.

NOTICE

It is wise to have a qualified service technician periodically check the entire LP-gas distribution system in the motorhome. Scheduling such an inspection annually would be a recommended, preventive maintenance routine for each motorhome owner.

WATER HEATER:



WARNING

DO NOT APPLY 110 VAC POWER to or LIGHT the water heater until after the water heater is filled with water and the water lines and heater tank are purged of any trapped air. Failure to do so will damage the water heater and might cause additional damage to the motorhome.

Before the water heater is to be used, fill the fresh water system and purge the water lines to and from the water heater by opening all the hot-water faucets, until water steadily flows from each one and no spurting or hissing sounds are heard. The water heater (Figure 5-7), uses the 120-volt AC electrical system to operate the heater.

Proper and safe operation of the water heater requires that all safety information provided in the owner's manual be read and understood before placing the water heater in service. Take the time to become familiar with this manual (provided in the Owner's Information Package).

NOTE: When you turn ON the switch for the water heater, the middle red button will light up. It will go OFF after several seconds—this means the water heater is lit. However, if the light stays illuminated, then that means the water heater has not ignited.



WARNING

DO NOT STORE any combustible or flammable substances near or adjacent to the water heater. Provide adequate space for ventilation and air circulation.

120 VOLT AC ELECTRICAL OPERATION:

For detailed information on the water heater or specific information about select steps in operating the water heater, refer to the owner's manual for this appliance contained in the Owner's Information Package.

WATER HEATER STORAGE:

If the motorhome is to be stored during the winter months, the water heater (Figure 5-7) should be drained to prevent damage caused by freezing water contained in the water heater. To drain the water heater, first turn OFF all electrical power, then turn OFF the water pump. Open both the hot and the cold-water faucets to drain the water lines and open the drain on the water heater to drain the entire system.

When re-activating the water heater after the motorhome is taken out of storage, make sure that the entire water system, including the water heater, has been filled with water and the lines have been purged of any entrapped air before relighting the water heater. Failure to do so might allow the water-heating element to be turned ON before it is immersed in water; thereby, causing the premature failure of the heating element and voiding the warranty.

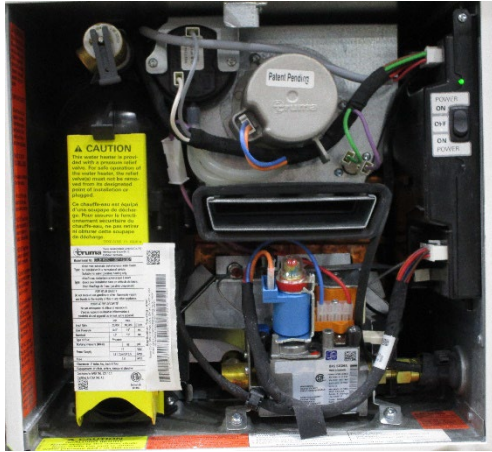


Figure 5-7: Water Heater



Figure 5-8: Water Heater Relief Valve

PRESSURE RELIEF VALVE:

The relief valve (Figure 5-8) for over-pressure and over-temperature conditions is located on the exterior of the water heater. This valve will operate if the water temperature reaches or exceeds 210°F or if the water pressure reaches or exceeds 150 psi.

Since the water system in the motorhome is a closed system when all water valves are shut, the water heating cycle can raise the temperature and, consequently, the pressure, of the water in the water heater; thereby realizing pressure increases approaching 150 psi.

Should this pressure (i.e., 150 psi) be reached, the pressure-relief valve will begin “weeping,” that is, there will be minor dripping or leakage from that valve until the pressure drops below 150 psi, at which time the pressure-relief valve will reset itself and restrict the water flow. This is normal operation and should not be a cause for alarm. Do not obstruct or block the pressure-relief valve in any way, as this would keep the valve from functioning normally and protecting the hot water system.

Due to Tiffin Motorhomes’ commitment to continuous research and development, some units might also contain major appliances manufactured by other companies other than what is shown in the figures of this section. Refer to the information in your Owner’s Information Package for more information on your coach brands

ENTERTAINMENT

Chapter

6

TELEVISION SYSTEM OPERATION:

TELEVISION ANTENNA:

You can automatically search for channels that are active in your area by editing and scanning channels on your remote control. To set up the television, refer to the television instruction manual provided.

NOTE: The antenna booster is located in the bedroom vanity of your unit, and must be ON when using the antenna, and OFF when using cable.

NOTE: If the motorhome has been moved, the channels must be rescanned on each TV.

NOTE: Due to Tiffin Motorhomes' commitment to continuous research and development, some units might also contain televisions manufactured by other companies (LG, Samsung, etc.). Refer to the information in your Owner's Information Package on setup for the brands.

TELEVISION SATELLITE DISH (OPTIONAL):

The motorhome might be equipped with an in-motion TV satellite dish control system (Figure 6-1) to permit access to satellite television. If so, the satellite will be equipped with a standard, non-high-definition receiver.

If the motorhome is equipped with an optional satellite dish, it can receive High Definition (HD) satellite signal from Dish Network. The dome satellite, on top of the coach, can be raised to allow easy access to change the switches to a new satellite provider.

Follow the directions in the Owner's Manual for this dish-control mechanism to obtain the best orientation of the satellite dish for the desired television reception.



Figure 6-1: Dome Satellite

To set up the satellite receiver for Dish Network™ (Factory Configuration):

- Remove the satellite dome cover on top of the motorhome by releasing the screws around the dome.
- 1. Change dish settings to 4-7-8 by adjusting the dipswitches to the DOWN position (8 is already in the DOWN position).
- 2. Re-install the dome.

On the Dish remote:

3. Press MENU.
4. Press the no. 6 button.
5. Press the no. 1 button.
6. Press the no. 1 button again. This will bring up the Dish screen. Go to the right-hand column where it says, "CHECK SWITCH."
7. Once this is done, EXIT the system, then press 0-0-0 to download the information.

FLAT SCREEN TELEVISION AND SOUNDBAR:

The Allegro can receive channels that are broadcasting in High Definition.

To receive a clear picture from your satellite dish, you must subscribe to High Definition (HD) service. The Allegro is equipped with an automatic switching box that enables you to easily change between TV input modes.

To change the mode of your television, press INPUT on your remote control. Then, select TV, or Satellite, and press OK. The flat screen television (Figure 6-2) is powered by 120-volt AC electricity; therefore, the motorhome must either be plugged into an external source of AC power or using on-board power from the generator.

An optional inverter would also permit the 12-volt DC power to be converted into 120-volt AC for the television. The soundbar speaker (Figure 6-3) is located above the flat screen TV, as shown in Figure 6-2. Detailed operation of the flat screen television and soundbar is provided in the accompanying owner's manuals found in the Owner's Information Package included with the motorhome.



Figure 6-2: Living Area Television Set



Figure 6-3: Sound Bar

CABINETS & FURNITURE

Chapter

7

CABINETS:

The Allegro contains cabinetry (Figure 7-1 and 7-2) installed throughout the motorhome from the driver's area, through the kitchen/dining areas, and back into the bedroom.



Figure 7-1: Kitchen Cabinetry



Figure 7-2: Overhead Cabinetry

The cabinetry has been designed and built to provide ample storage space, to be easily accessible, and to be conveniently located to support areas of concern.

Construction of these cabinets incorporates various hardwoods, raised panels, cabinet doors, and supports. Door pulls, handles, and knobs are installed in a style complementing the décor of each motorhome so that an aesthetically pleasing, as well as fully functional, storage capacity is realized.

For the floor plans available in the Allegro product line, cabinet design has been optimized to provide maximal storage for each floor plan available. Accordingly, the Allegro can readily accommodate the routine materials, supplies, and customer-specific items desired for any travel requirements.

These cabinets are designed to contain stored supplies quite securely during travel to minimize or eliminate the possibility of shifting or spilling of cabinet contents during travel. However, when the motorhome is parked, all stored items are readily available in the cabinets for the convenience of the users.

As the storage requirements will vary somewhat from one floor plan to another, general observations can be made about the Tiffin-supplied cabinetry, which might or might not be applicable for your specific motorhome configuration.

Cabinets are provided in the kitchen/dining area (Figure 7-1) to accommodate the routine cooking utensils and groceries normally required for travel. Storage space within these cabinets has been designed to accommodate the typical sizes and configurations of food supplies (e.g., cereal boxes, condiments, canned goods, bottled liquids) normally taken on travel trips.

Based on Tiffin Motorhomes' extensive experience with travel requirements of the seasoned motorhome users and from Tiffin Motorhomes' own research and development in cabinet design requirements, the cabinets offer the greatest storage capacity possible. In the bathroom and bedroom, additional cabinets are available for storage of sundries and toiletries specific to these areas. In the kitchen, a color-coordinated countertop is provided on top of the floor-mounted cabinets. To maintain the appearance of the countertop, clean with a damp cloth. If spotting occurs, clean the countertop with a damp cloth and a mild liquid soap. Should some dried-on residue persist, let a damp moistened cloth with the liquid cleaner lay directly on top of that residue for 15–30 minutes to loosen the residue, then clean that spot accordingly.

NOTE: Strong chemicals, solvents, and cleaners (e.g., oven cleaner) might damage the surface; do not use any products not specifically designed for countertop cleaning.

The countertop might be physically damaged, too, if proper care is not taken. Do not cut anything (e.g., vegetables, fruits) directly on the countertop; rather, use a cutting board on top of the countertop to provide necessary protection. Excessive heat might also damage the countertop; therefore, any pots or pans taken directly from the range or oven must not be placed directly on the countertop; rather, use trivets or some other form of fireproof heat insulators to hold very hot pots or pans on the countertop. All drawers are equipped with



Figure 7-3: Booth Dinette

metal slides to provide additional load-bearing strength, and to permit effortless opening and closing of the drawers, even when they are fully loaded. These metal guides have a slight “locking” action, when closed. As this cabinetry is typically of furniture-grade quality, any commercial furniture polish or cleaner can be used. Do not try to soak these wooden surfaces with water or any other liquid; be sure to wipe up spills or residues of any fluids that contact these surfaces to preclude any staining or discoloration of the cabinet surfaces.

FURNITURE: KITCHEN, LIVING & DINING AREAS:

In the motorhome, a built-in booth dinette (Figure 7-3) is standard. This booth dinette provides additional storage under the seat area of the booth, in addition to providing additional sleeping space.



Figure 7-4: Remove Seat Cushions



Figure 7-5: Lock Lever



Figure 7-6: Adjust Tabletop



Figure 7-7: Reinstall Cushions



Figure 7-8: Sleeper Sofa



Figure 7-9: Remove Seat Cushions

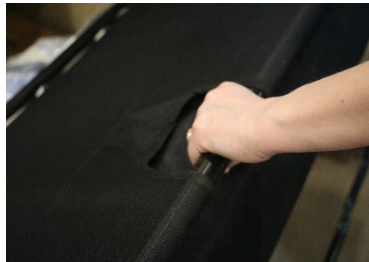


Figure 7-10: Pull Handle



Figure 7-11: Stand the bed



Figure 7-12: Bed Frame fully extended.



Figure 7-13: Super Sofa



Figure 7-14: Remove Sofa Seat Cushions

To convert the booth dinette into a bed:

1. Remove side and seat cushions as shown in Figure 7-4.
2. Turn the lock lever underneath the table as shown in Figure 7-5.
3. Adjust the tabletop to rest on top of the seat storage boxes as shown in Figure 7-6.
4. Reinstall side and seat cushions to assemble the mattress for the bed application as shown in Figure 7-7.

The motorhome living room may contain the optional Theatre Seats, "Flip and Fold Sofa, air coiled Sleeper Sofa, or the Super Sofa. The sleeper sofa (Figure 7-8) converts into a bed. This Sleeper Sofa includes an electrical air pump for inflating the mattress. The Super Sofa consists of a center console, a single theatre seat, and a sofa bed. The Super Sofa can be converted into a 70" x 51" bed, see Figure 7-18.

To convert the Sleeper Sofa into a Bed:

1. Remove the seat cushions as shown in Figure 7-9.
2. Pull bed frame out using the pull handle as shown in Figure 7-10
3. Stand bed frame and mattress as shown in Figure 7-11.



Figure 7-15: Pull the front of cushion to unfold Bed Frame.



Figure 7-16: Never pull the back of cushion to unfold



Figure 7-17: Stand Bed Frame.



Figure 7-18: Bed Frame fully extended.

4. Pull bedframe and mattress downward direction until the bedframe is fully extended by touching the floor as shown in Figure 7-12.
5. Plug mattress cord to 120V floor receptacle located on the Kitchen Cabinet- not shown.

To convert the Super Sofa into a bed:

1. Remove the sofa seat cushions as shown in Figure 7-14
2. Pull bed frame out at the front bottom edge of the seat cushion as shown in Figure 7-15.
3. **Never pull bed frame from backside of the seat cushion as shown in Figure 7-16.**
4. Stand bedframe and mattress as shown in Figure 7-17.
5. Pull bed frame downward until the bed frame is fully extended as shown in Figure 7-18.



Figure 7-19: Driver's Chair (swiveled to the living area)



Figure 7-20: Seat Swivel Lock Switch



Figure 7-21: Heated Seat & Lumbar Adjustment Switches

The driver's seat (Figure 7-19) swivels manually. When the motorhome is parked, the driver's seat can be swiveled to face into the living room. To swivel this chair, first extend the slide-out room (see Chapter 10). Then, move the chair backwards as far as possible to gain

clearance from the steering wheel. Now the chair can be swiveled without interference. The passenger seat also swivels manually. This seat is a powered operating seat having essentially the same controls as that of the driver's seat. The passenger seat provides a comfortable footrest for your use. Both the passenger and driver's seats come equipped with a heater and lumbar support. The switches for these features (Figure 7-20 and Figure 7-21) are located on the side of each seat.

STRUCTURAL FEATURES

Chapter

8

CHASSIS FEATURES:

The chassis (Figure 8-1) of your Tiffin Motorhomes Allegro was built by and is warranted by Ford Motor Company. The operating instructions for the chassis are included in the Chassis Owner's Manual, which is provided with your Allegro and is a part of the Owner's Information Package furnished to you by your Tiffin Motorhomes dealership.

Before you begin using your motorhome, read and follow all recommendations for the proper care, operation, and maintenance of the chassis—this will ensure a pleasant, trouble-free use of the vehicle. If you have any questions about the chassis, however, contact your chassis manufacturer.

Call 256-356-8661 ext. 2382 for questions about your chassis, and 256-356-8661 ext. 3385 for parts.



Figure: 8-1

ELECTRICAL FEATURES

Chapter

9

GENERAL INFORMATION:

There are two electrical systems in your motorhome. These are the 12-volt DC (VDC) system and the 120-volt AC (VAC) system. Most standard appliances require the 120 VAC system, while most of the lighting systems used in the motorhome use the 12 VDC electrical system. The electrical power for the 12 VDC system is supplied by the batteries of the motorhome. Those batteries are charged by a power converter. The alternator also charges the batteries when the engine is running. The electrical power for the 120 VAC is supplied by the power cord when the motorhome is connected to an external power source or when the on-board electrical generator is in operation. The converter/inverter can also supply 120 VAC electrical power (to limited outlets and limited appliances). The inverter transforms the 12 VDC electrical power from the batteries into the 120 VAC electrical power for the basic appliances.

To connect the motorhome to an external source of 120 VAC electrical power, Tiffin Motorhomes recommends that all the circuit breakers be in the OFF position, (this is done to prevent any power surge when connecting the motorhome to the external power source), and then unwind the power cord from the electrical compartment located in an external compartment. The standard, flexible, power cord supplied with the motorhome is designed to handle up to 50 amperes. Make sure that the pins in the male end of the plug are oriented correctly so that they match the power cable, and that they are in good condition (i.e., are not bent or damaged).

If there is a circuit breaker switch at the “plug” end of the power cord, that breaker must be turned OFF before making the connection. Insert the plug into the mating outlet and then turn the circuit breaker ON. Close and lock the electrical compartment door to protect the contents and to keep them clean and dry. Close the cover on the power box, if so equipped, to avoid unintentional disconnection and to keep the contents clean and dry. Then switch the main breaker to the ON position. When connected the 120 VAC Provides power to all 120 VAC circuits and outlets when the main breaker is turned ON.



CAUTION

Failure to turn off the 120 VAC appliances when starting or stopping the generator might damage the transfer switch and/or electrical appliances.



WARNING

To protect the 12 VDC system, DO NOT STORE anything in circuit panel compartments (e.g., toolbox), which might jostle around, break through the shield, and short out the 12 VDC system. If this system were short-circuited, extensive damage and/or fire could result.

EXTERNAL SOLAR PORT:

The Allegro is equipped with an external Solar Port (Figure 9-1) located on the water board compartment located on the driver's side exterior . It allows you to plug in your own solar panel. The port is designed to handle a maximum of twenty (20) amps. The solar panel **MUST** have its own controller. Tiffin Motorhomes is not responsible for the improper use of the External Solar Port.




Figure 9-1: Solar Port

ELECTRICAL CAUTIONS:



CAUTION

- Careless handling of electrical components can be fatal. Do not touch or use electrical components or appliances while feet are bare, hands are wet or standing in water or on wet ground.
- Do not touch an extension cord to the utility power cord.
- Avoid overloading circuits and replace fuses or circuit breakers with those of the same size and amps only. DO NOT use a higher rated fuse or breaker.
- Do not plug the utility power cord into an outlet that is not grounded.
- Do not adapt a plug to connect to a receptacle that it is not designed for.
- Be sure that all electrical appliances used inside the motorhome contain three-prong plugs for proper grounding.
- Use caution when handling or working near electrical storage batteries.
- Always remove jewelry and wear protective clothing and eyewear when working on an electrical matter.

CIRCUIT BREAKER BOXES:



Figure 9-2: Breaker Boxes

Interior 120 VAC and 12 VDC breaker boxes (Figure 9-2) are typically located in the rear closet, bedroom vanity lower cabinet, hall bathroom overhead cabinet, or rear bathroom overhead cabinet. Exterior House 12 VDC breaker box is located in the Mid-Bathroom above the sink.

The circuit breakers and associated fuses are installed to protect the electrical system of the motorhome from any overloads. Do not attempt to change the electrical circuitry or to add appliances yourself.

The 120 VAC power supplied from the shoreline or generator enters the MAIN circuit breaker, located on the left side of the AC breaker box. This double circuit breaker will disconnect power from all 120 VAC appliances when tripped. Each circuit breaker has a label giving an indication of the device to which it is passing power. Check these circuit breakers if a 120 VAC powered device is not working.

Fusing is provided for 12 VDC circuits, such as: interior decorative and overhead lighting, water heater, TV switching box, slide-out lights, power roof vents, monitor panel, and the passenger side console switch panel.

Additional House 12 VDC breaker boxes are typically located in the front driver's electrical box in front of, or behind, the wheel well.

A multiplex-based system with power distribution modules supply the 12 VDC functions for the chassis functions. These modules and associated circuit protecting fuses/breakers are located either in front of, or behind, the driver's front wheel well electrical compartment.

Located on the passenger-side rear compartment is another circuit panel, which contains circuit breakers such as slide-outs, 12 VDC disconnect storage box lights, and solenoids.

AUXILIARY START SWITCH:



Figure 9-3: Auxiliary Start Switch

The Auxiliary Start Switch (Figure 9-3) is located on the switch panel to the left of the steering wheel in front of the driver's-side console box.

This switch connects the motorhome coach batteries to the chassis batteries—this allows the chassis batteries to “borrow” power from the coach batteries to assist in starting the engine. If the chassis batteries cannot start the engine by turning the ignition key, hold down the battery-boost switch for at least 60 seconds and retry starting the engine. When attempting to use the auxiliary

start switch function, Tiffin Motorhomes recommends that you press and hold the switch for about 60 seconds before trying to start the engine. This gives the two sets of batteries (house and chassis) a chance to equalize before engaging the starter. The multiplex system that controls most chassis functions will need to reach optimal voltage range to ensure proper operation as well.

BATTERY INSPECTION AND CARE:

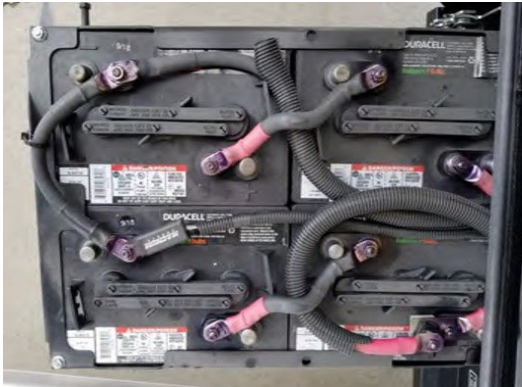


Figure 9-4: House Batteries

The motorhome batteries (Figure 9-4) are located on a sliding tray, which extends from an underneath compartment. The Allegro house batteries are located toward the rear passenger's side.

To access these batteries, undo the latches securing the sliding assembly, and slide the tray out of the compartment. When access to these batteries is no longer needed, replace the sliding battery assembly, making sure that it is securely latched. When batteries are not used for extended periods, they will gradually lose their electrical

charge. Therefore, it is necessary to periodically recharge the batteries to increase the operational lives of the batteries. It is also necessary to check the external condition of the batteries on a regular basis. Look for cracks in the battery case and cover. Check the vent plugs and replace them if they are cracked or broken. Keep the battery clean.

Since accumulations of dirt and acid residue around the battery terminals might provide an electrical path for discharging the battery, the area around the terminals must be cleaned periodically. You can use an old toothbrush and a sparse amount of a diluted solution of baking soda (sodium bicarbonate) and water (distilled or de-ionized, preferred; tap water, acceptable) to clean and neutralize any acidic build-up around the battery terminals. If there is any foaming on the top of the battery, this indicates that acidic residues are being neutralized. Rinse the cleaned areas thoroughly with distilled or de-ionized water (tap water is okay, too).

Avoid getting the baking-soda solution into the battery fill plugs to each battery cell; this would drastically reduce the effectiveness of the battery (by neutralizing the sulfuric acid in the battery cells) or, worse, "kill" the battery. Dry the battery cables and terminals to prevent corrosion; to protect those terminals further, use a plastic ignition spray on the terminals. Do not use grease on the terminals, especially on the metal-to-metal connections, as grease might act as an insulator and keep the battery electrical power from entering the cables.

If the batteries are not going to be used for an extended period, remove them from the motorhome and store them in a warm, dry place. Tiffin Motorhomes recommends this

NOTICE

If the motorhome ever requires any welding operations on the frame, first disconnect the chassis batteries. Failure to do so will destroy all of the chassis computer system.

service be performed by a qualified service technician, as the process is usually too complicated for the average owner to perform. For those who might wish to perform this service themselves, use the following procedure: Mark the battery cables (“+” sign or “red” for the positive cable; “-” sign or “black” for the negative cable) so that they can be properly reconnected again later. These batteries require periodic recharging to maintain their full charge.

Over time, the batteries will lose some of the water used with the sulfuric acid in the batteries. Following manufacturer’s recommendations as found in the Owner’s Information Package, periodically check the fluid levels in all the cells of the batteries (be sure to use safety eyewear during this process) and fill those that are low with water (distilled or de-ionized water is preferred; tap water is okay).

NOTICE

Disconnect the 120 VAC electrical power cord and the negative terminal from the coach batteries BEFORE working on the motorhome electrical system.

Do not overfill the cells; follow the filling directions exactly. Check the battery on a regular basis to realize the fullest service possible from the batteries over the longest time possible. If the motorhome is stored for an extended period, disconnect the 12 VDC battery system, this procedure will prevent unnecessary drain and corrosion of the batteries and their terminals.



WARNING

Remove rings, metal watchbands, and any other metal jewelry before working around batteries. If any metallic object (tool, jewelry, etc.) contacts the positive battery terminal or any connection made to that terminal AND contacts the negative terminal or any of its connections, a SEVERE ELECTRICAL SHORT will occur, which could result in an explosion, fire, and/or personal injury. Lead-acid batteries contain diluted sulfuric acid, which can be dangerous; avoid direct contact with any battery fluids. Wear eye protection.

120 VOLT (VAC) AC RECEPTACLES:



Figure 9-5: 120 VAC Receptacle

Your motorhome is equipped with several 120 VAC receptacles (Figure 9-5) located throughout the interior of the motorhome. These 120 VAC receptacles are of the “three-prong” variety; the third prong being a grounding pin that provides adequate grounding to protect one from any electrical shock. For these receptacles to work properly, do not use an adapter, cheater, or extension cord, which defeats the function of the grounding pin. For the same reason, never remove or bend away the ground prong or pin from any three-prong AC plug so that it would fit a two-prong AC receptacle (i.e., an un-grounded AC receptacle).

Never operate the motorhome if there is an electrical short present, as an electrical short might deliver an electrical shock to anyone making contact with the exterior of the unit. If you feel even the slightest of electrical shock, immediately disconnect the unit from the 120 VAC power source and locate the electrical fault (i.e., typically, it is a break in the grounding circuit). Do not reconnect the 120 VAC power until after the electrical fault is fixed—the grounding circuit must be continuous from the frame to the distribution panel, to the power cord, and to the earth ground so that electrical-shock protection is realized.

12 VOLT DC (VDC) RECEPTACLES:



Figure 9-6: 12 VDC Receptacle

Your Allegro motorhome might be equipped with a 12 VDC receptacle conveniently located inside of the center console (Figure 9-6). This 12 VDC receptacle can be used for providing power to various items, such as cellular phones, personal computers, or portable communications equipment. This receptacle is usually found on the bulkhead in front of the passenger’s seat so that it is conveniently available. This receptacle accommodates the “cigarette-lighter” type of connector.

USB RECEPTACLES:



Figure 9-7: USB Receptacle

The motorhome is equipped with USB ports (Figure 9-7) conveniently located on the front dashboard and in the bedroom area as well as on the passenger console. These ports allow for easy access when charging cell phones, laptop computers, iPods, iPads, or tablets.

GROUND-FAULT-CIRCUIT-INTERRUPT RECEPTACLES:



Figure 9-8: GFCI Receptacle

In the kitchen and bath areas, there are 120 VAC GFCI receptacles (Figure 9-8), which provide greater protection against inadvertent electrical shocks. These specialized GFCI receptacles provide both overload and short-circuit protection for the user. The electrical receptacles located in the slide-out are wired through the kitchen GFCI. The exterior receptacles are wired through the bathroom

GFCI. If an appliance plugged into a slide-out or exterior receptacle is not working, check for a tripped GFCI in the kitchen or bathroom. The GFCI should be tested at least once a month. The 120 VAC electrical system must be ON for the GFCI to be tested. All GFCI-protected receptacles are marked as such, but only one of them might have two push buttons on the receptacle (as shown in the picture). The upper pushbutton is a “test” button, which can be used to ensure that the GFCI function is working.

To reset this GFCI breaker, push the lower button (the “reset” button) to restore power to all the GDCI receptacles on this circuit. These receptacles protect the user from ground faults between an electrically “hot” wire and ground. The GFCI will not reduce the shock hazard if the short is between a neutral and “hot” wire, or two “hot load” wires. The GFCI must be tested at least once a month. The 120 VAC electrical system must be ON for the GFCI to be tested.

To test the GFCI, the reset button must be pushed in fully before starting the test. Push the test button; this will cause the reset button to pop out, which means that the protected circuits have been disconnected. Push the reset button back in until a “click” is heard—this will reactivate the protected circuit. If the GFCI is working properly, the reset button will remain in the “in” position.

CONVERTER/INVERTER:

A 1200 W converter/inverter (Figure 9-9) is provided as a standard feature on the Allegro but can be upgraded to a 2000 W model. This converter/inverter provides these three basic functions:

- Convert 120 VAC power into 12 VDC power when 120 VAC is available. The converter will create 12 VDC to charge the house batteries when 120 VAC power is available from the shoreline or the generator. Please check the manufacture’s operations manuals for details.



Figure 9-9: Converter/Inverter

- Invert 12 VDC power into 120 VAC power when 120 VAC is not available. The inverter can create 120 VAC to power the entertainment system (e.g. TVs, Blu-ray player) and an optional residential refrigerator when 120 VAC power is not available.
- Transfer 120 VAC power to the inverter loads (e.g. entertainment system, optional refrigerator) when 120 VAC power is available.

The converter/inverter will transfer or pass 120 VAC power to its loads when plugged into shoreline or running the generator. The converter/inverter is conveniently located in one of the compartments located beneath the motorhome. Do not store items around the inverter as these items could cause accidental electrical short circuits or obstruct the cooling fan leading to overheating.



Figure 9-10: Remote Panel

On the front face of the inverter remote panel (Figure 9-10), there is a green LED labeled CHARGING/INVERTING, and a small grey button labeled POWER ON/OFF. AC in and AC out circuit breakers can be found on the outward face of the 1200 W models, and on the side face of the 2000 W model.

When the unit is inverting, the green status LED will blink once every second. When the unit is charging, the green LED will light up solid green if the unit is bulk charging, blink once every second when absorb

charging, and blink once every eight seconds when float charging. Refer to the manual for your inverter model for more information.

The POWER ON/OFF button can be pressed and released to turn the inverter ON and OFF. Note that this will not turn off the charging function or restrict power transfer when the converter/inverter is connected to a 120 VAC source.

The POWER ON/OFF button is also used to perform a soft reset of the inverter. Before performing a soft reset, disconnect the unit from any 120 VAC source, as leaving it connected during a soft reset might cause damage to the converter/inverter. Press and hold in the button for 15 seconds until the green status LED starts blinking rapidly. Release the button and the LED should go out. Press and release the button to complete the soft reset.

The 12 VDC wiring for the converter/inverter comes from the circuit breaker located underneath the step cover next to the house batteries. Check this circuit breaker if converter/inverter functions are not working.

The 120 VAC wiring for the converter/inverter comes from a circuit breaker in the circuit breaker box. This is the 120 VAC power that goes into the converter/inverter. There is also a 120 VAC wiring from the converter/inverter returning to a circuit breaker in the circuit breaker box. This is 120 VAC power that comes out of the converter/inverter used to power the inverter loads. Check these circuit breakers if converter/inverter functions are not working.

There are two circuit breakers located on the converter/inverter. One of the circuit breakers is for the 12 VDC charging circuit, the other circuit breaker is for the 120 VAC output. Check these circuit breakers on the converter/inverter if there are functions not working.

ELECTRICAL GENERATOR:

The electrical generator (Figure 9-11) is either 5.5 KW or 7.0 KW, depending on the Allegro model chosen, and is conveniently located in one of the side compartments in the motorhome. Before starting or stopping the generator, make sure that all the 120 VAC appliances are turned OFF. After the generator has started, wait until the transfer switch has connected before turning ON any of the appliances.



Figure 9-11: Electrical Generator

The generator can be started from either the remote-start switch located on the dash or directly at the generator itself. The hour meter installed on the generator records the number of hours of operation of the generator motor—this elapsed time is needed for observing necessary maintenance schedules on the generator. For more detailed operating instructions and to determine necessary preventive maintenance schedules and procedures, review the manufacturer's owner's manual.



CAUTION

Failure to turn OFF the 120 VAC appliances when starting or stopping the generator might damage the transfer switch and/or electrical appliances.

NOTICE

Be sure air conditioning units are OFF before connecting or disconnecting to or from the shore power.



CAUTION

Service to this box must be done by a qualified technician. DO NOT attempt to remove cover unless the shore cord is unplugged, and the generator is off.

AUTOMATIC TRANSFER SWITCH:



WARNING

Be careful when working around these connections, as an accidental electrical short to ground (i.e., momentarily connecting the “positive” or “hot” terminal to any part of the chassis) can be hazardous.

The automatic transfer box switches 120V AC power from the shore or generator to the motorhome’s main distribution panel. The transfer box has a delay of around three seconds before switching power to the shore, and a delay of around 30 seconds before switching power to the generator.

If the unit is plugged into shore but there is no power to the motorhome, then make sure the shore outlet has power. If power is present, this might indicate that the unit is sensing an open neutral condition. Start the generator; if the power is restored, then the shore plug, or the outlet might be defective (the neutral line might be broken).

If there is no power to the motorhome from the shore or generator, then check the generator circuit breaker. If the circuit breakers are not tripped in the generator or the coach, the transfer box might need to be replaced. For more detailed information on the automatic transfer switch, refer to the specific owner’s instructions found in the Owner’s Information Package.

CIRCUIT BREAKERS:

The circuit breakers (Figure 9-12) are located on the driver’s side behind the front tire in the external storage compartment.

When the circuit breakers are shut down or electrically tripped, they must be manually reset using the main touch panel. These breakers protect the slide-outs, the AC ignition, the electric step, the 30-amp ignition system, and the 12 VDC disconnect system. As needed, manually reset the circuit breaker or breakers as shown in the accompanying figure.



Figure 9-12: Circuit Breakers

FUSE BLOCKS:

Some of the electrical circuitry within the motorhome is protected by various fusing systems. Some of these fuse blocks are immediately accessible from the driver’s side underneath the dashboard. These fuse blocks protect some of the major electrical systems of immediate concern to the driver.

The electrical circuits protected by the under-dash fuse block include headlights, panel light for dashboard, taillights, optional jacks, turn signals, cruise control, engine computer,

accessory fuses, heater, and dash air conditioning. Additionally, there is another chassis fuse panel that works in conjunction with the chassis fuse panel and provides comparable protection for the above-listed circuits.

Located beneath the access panel on the dashboard are two additional fuse panels; these panels protect the following electrical systems: mirrors, optional satellite jacks, camera, optional power windows, dash trim, lighter, map light, optional power seats, and radio.

Should there be any electrical failure of these components or systems, the first troubleshooting procedure should be to check the fuses and have available replacements to replace any blown fuses, as might be warranted.

As an aid to extracting and/or installing fuses in the fuse blocks, one might wish to buy an inexpensive fuse puller at any electronics or hardware store. This tool makes the installation or removal of fuses much easier and prevents inadvertent damage to nearby fuses or the fuse block itself.

SEVEN-PIN TOWING CONNECTOR:

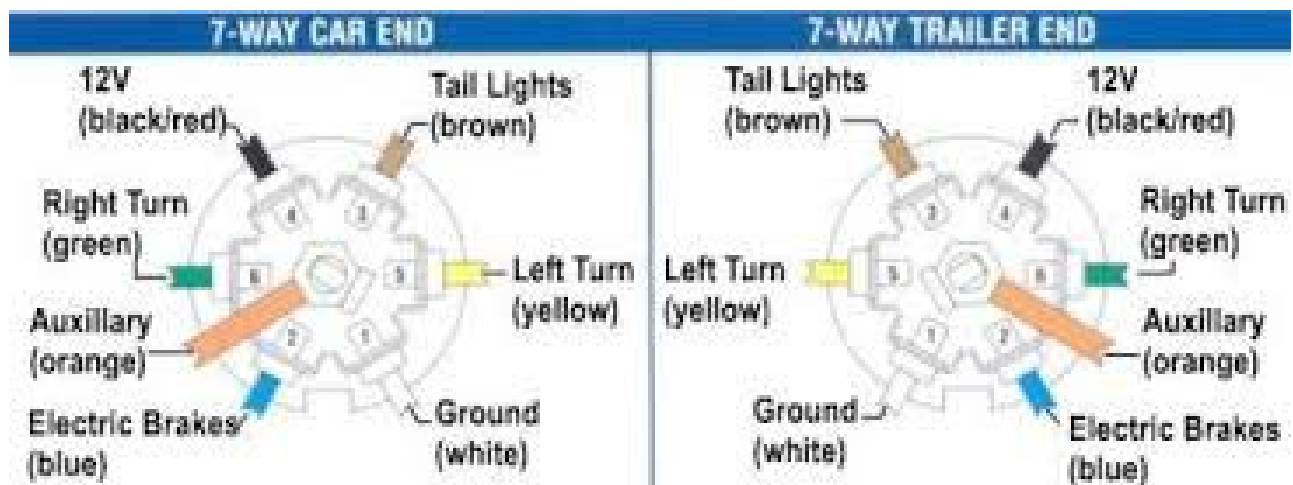


Figure 9-13: Seven Pin Connector Diagram

The motorhome is equipped with a standard, 7 pin connector near the towing hitch at the rear of the motorhome to supply the necessary circuitry to control a towed vehicle. The wiring of that connector is shown in Figure 9-13.

Make sure that any cable from the vehicle to be towed is wired correctly to mate properly with the connections shown in the connector. If in doubt about proper wiring, have a qualified service technician prepare and install the necessary cable to mate with the 7-pin connector on the motorhome to ensure proper operation subsequently when any vehicle is towed by the motorhome.

When the towed vehicle is uncoupled from the motorhome and the cable is disconnected from the 7-pin connector, be sure to close the spring-hinged cover plate on the connector to protect the contact pins from dirt or debris. In a similar manner, protect the cable end from similar damage, weather, or debris—one such method could be to place the connector end

in a heavy-gauge plastic bag (e.g., polypropylene, polyethylene, etc.) and secure the bag tightly around the cable with a stout elastic band or tape and then mount the secured cable in a manner to keep it both from mechanical damage and water intrusion.

When the towed vehicle is again coupled to the motorhome through the towing hitch and the cable is again connected to the 7-pin connector, make sure the resultant connection is tight and solid so that the connection does not jar loose during use. Several supplemental methods to secure that connection have been used; some of which include securing the connection with a strong rubber band or with Velcro-type fasteners to provide a supplemental mechanical backup to the actual electromechanical connection. If a conversion adapter to convert the round, 7-pin connector to a flat, 4-pin connector is needed, purchase one from any RV after-market store.

SOLAR ROOF TOP PREWIRE (OPTIONAL):

The motorhome may accommodate one or two solar panels installed with prewired 8-gauge wiring and 30A circuits for future installation.

WIFI-SATELLITE PREPARATION:

The optional prepped cable will run from the sewer board in the basement on the driver's side and terminate in the entertainment cabinet in the bedroom. **NOTE: The Starlink must be disconnected from the power source when the motorhome is stored indoors.** For more information, visit the webpage on-line at www.starlink.com.

HOUSE BATTERY DISCONNECT PANEL:

The house battery disconnect panel (Figure 9-14) is located in the cargo storage area on the driver's side. Along with the inverter switch and several breakers, the rotary switch labeled House Battery Master Switch can be disconnect the house batteries when the motorhome is in storage. Rotating this switch disconnects the house batteries only, not the engine batteries. This feature is designed to disconnect all 12 VDC circuitry from the batteries and prevent them from being drained during storage.



Figure 9-15: 12 VDC Disconnect Switch



Figure 9-14: House Battery Disconnect Switch

12 VOLT DC DISCONNECT SWITCH:

For routine short-term use, there is a 12 VDC disconnect switch (Figure 9-15), on the switch console located in the stairwell of the Allegro. This switch can be used to disconnect the "house" battery

from most of the 12 VDC circuits in the motorhome so that there is no inadvertent drain on the battery.

SPYDER CONTROLS SYSTEM:

The 12 VDC system in your motorhome is controlled by the Spyder Controls Multiplex System (Figure 9-16). This electronic command center has an easy-to-read touchpad screen that enables you to control features throughout the coach. Through 6 tabs (Home, Lighting, Battery, Thermometer, Slide-outs, and Settings), this control system enables you to control almost every electronic feature inside your motorhome. It even enables you to control outside awnings and lights. As shown in the Figure 9-16, you can view tank levels, lighting controls, water heater controls, temperature, and much more. For detailed instructions and videos on the Spyder Controls System, visit online: www.spydercontrols.com. Click on the Customers tab at the top (Figure 9-17). To access text and audio files, use the following information:



Figure 9-16: Spyder Controls Multiplex System

Username: **Tiffin**

Password: **Motorhomes**

NOTE: Both username and password are case sensitive.

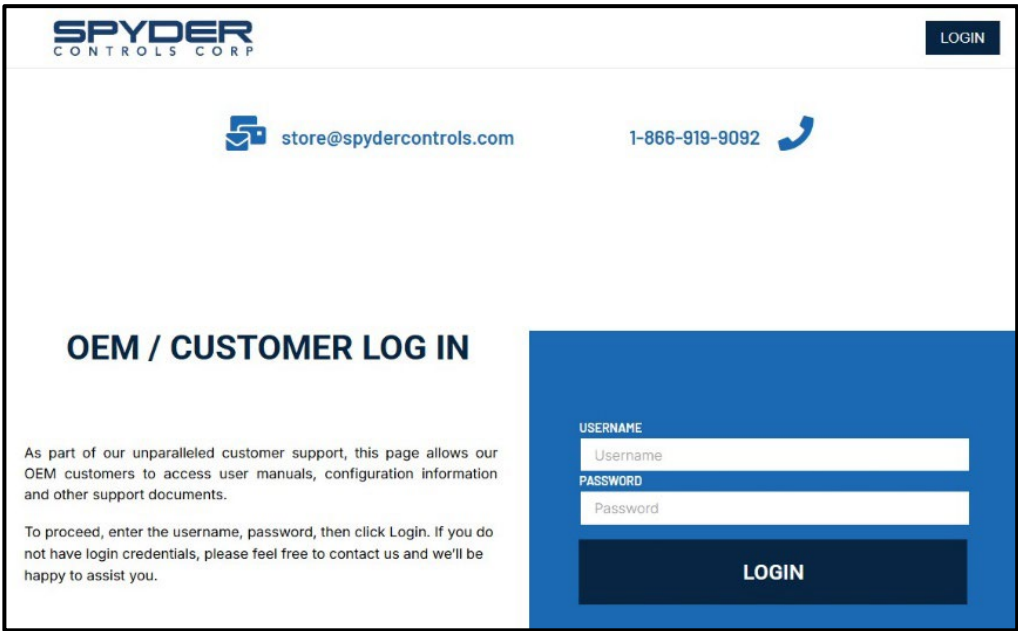


Figure 9-17: Spyder Controls Home Screen

MULTIPLEX SYSTEM:

The multiplex system (Figure 9-18), enables you to control circuits from multiple locations in the motorhome. Each switch enables you to turn a circuit ON or OFF with individual button presses and provides an indicator light to determine the status of the circuit (ON or OFF).

Additional features of the multiplex system include the following:

- **Master Feature** — Enables you to turn all lighting circuits ON or OFF by pressing a single button **labeled Light Master**. Pressing the **Light Master OFF** switch will turn off all the interior lights within the coach. Momentarily pressing the Light Master ON switch will turn on the same circuits that were on when the Light Master OFF switch was pressed. Light Master OFF remembers which lights were on when the switch was pressed and will turn those same lights back on when the Light Master ON switch is momentarily pressed. Holding the Light Master ON switch will turn on all interior light circuits.
- **Switch Panel Backlighting** — All of the switches are backlit to make the labels easy to read. If you desire to turn the panel lights OFF, a switch is conveniently located at the center of the coach labeled Panel Lights, which enables you to turn the back-lighting ON, OFF, or DIM.
- **Status LED Indicator** — A green LED beside each switch indicates whether the load is ON or OFF. In some cases, certain switches such as Awnings, Compartment Locks, and Generator do not have a status indicator at the switch.



Figure 9-18: Multiplex System Switch Panel

WIFI ANTENNA (OPTIONAL):

The motorhome may be equipped with WIFI Antenna (Figure 9-19) to permit access to local unlocked WIFI signals. This device is located in the driver's side overhead cabinet area. Cellular data plans may be purchased from the WIFI antenna manufacturers. See the antenna manufacturers' manuals or websites for more information.


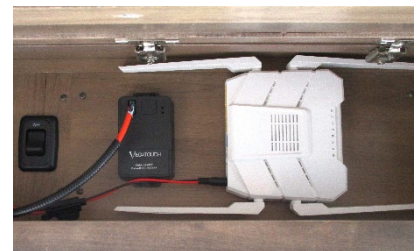


Figure 9-19 WIFI Antenna.

ELECTRICAL DIAGRAM LOCATION LINK:


G12 Pinout

2

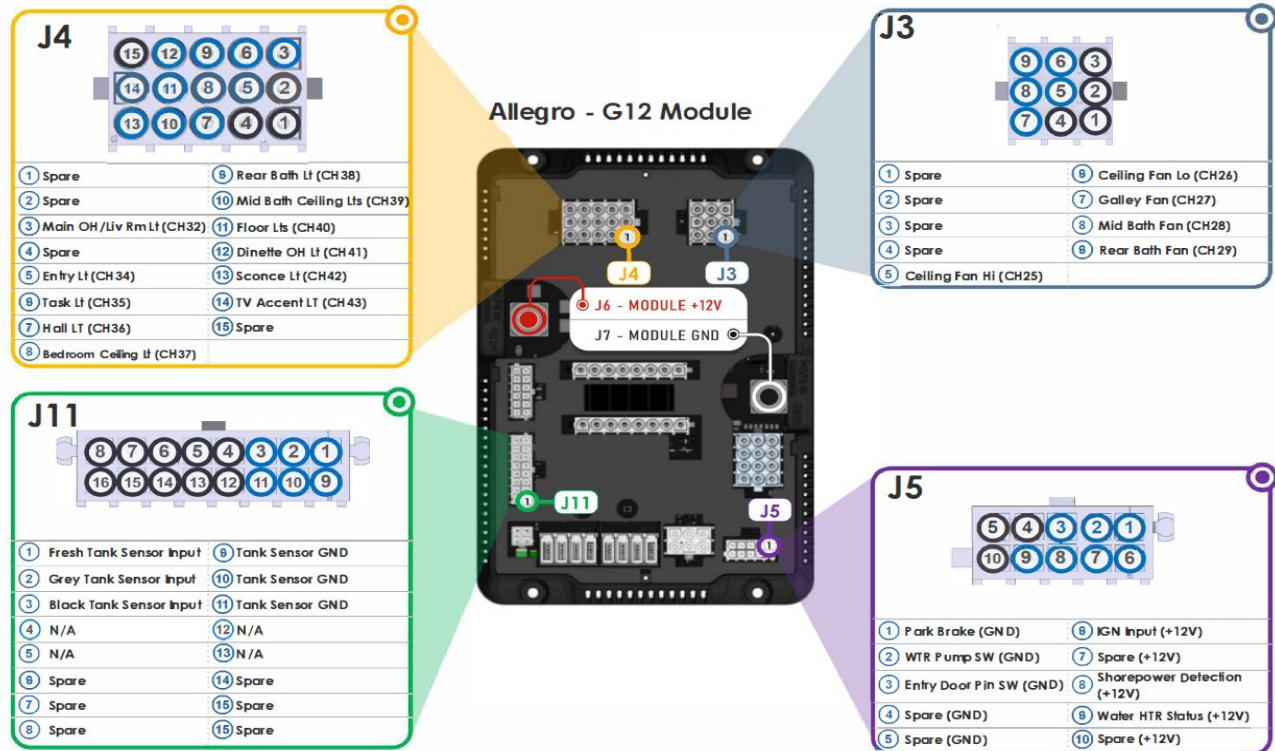

G12 Pinout (Continued)


3

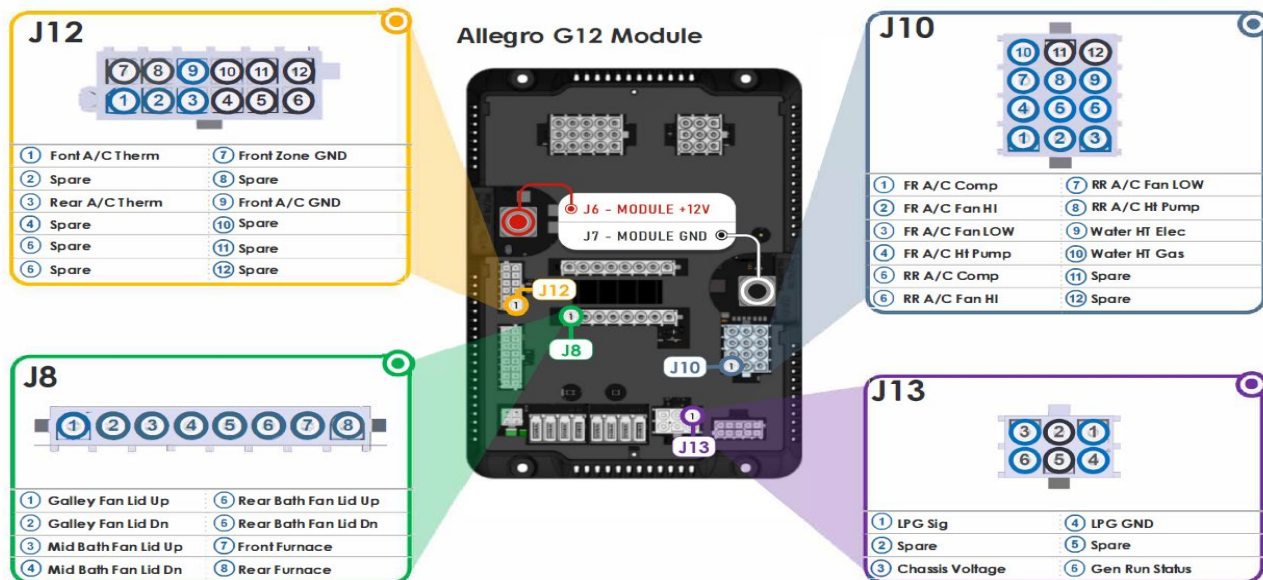


M1 Slide Card

Awning Constant
Undercoach Constant
Slide Breaker #1
Slide Breaker #2
Slide Breaker #3
Ignition (12V)
Park Brake (GND)
P/S FR Slide EXT
P/S FR Slide RET
D/S FR Slide EXT
D/S FR Slide RET
P/S RR Slide EXT
P/S RR Slide RET
D/S RR Slide EXT
D/S RR Slide RET
Hydraulic Pump

Allegro - Front M1



Front M1 Panel

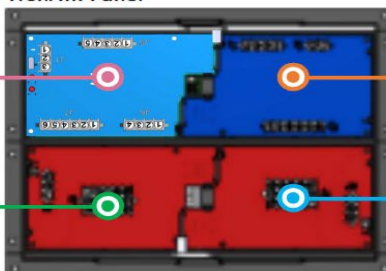

M1 High Current

Door/Assist Handle
Water Pump
Awning Light
Road
Porch
Tank HT Power Trigger
Door Awning EXT
Door Awning RET
Gen Start
Gen Stop

M1 Breaker (Card 3)

Camera/Radio (IGN)
Jack Buzzer (IGN)
Front Furnace
Rear Furnace
12V Outlet 1/USB PWR/Batt +12V
Batt HSE +12V/FR SHD
Entry Step (IGN)
TV Relay/Fridge/Dash SHD MOD (IGN)
HCR-11
Entry Step SW
Batt +12V HVAC
IGN (+12V)

M1 Breaker (Card 4)

12V Outlet 2/ USB PWR
AGS Power (HSE)
Slide 3 Power
Power Window (IGN)
D/S Mirror PWR (IGN)
P/S Mirror PWR (IGN)
Seat Power #1
Seat Power #2
Cargo Lights
Map Li/Fans/Radio
Truma (HSE)
SLD #1 PWR/Closet LT (HSE)
IGN (+12V)



Allegro AGS

When AGS is on, the Generator will start when your batteries reach the percentage specified in the AGS settings page. The Generator will also start if there is an HVAC load present.




G12 Module
© Under Bed

120V BREAKER PANEL



120V AC - 12V DC

Front M1 Panel




M1 High Current Card



Shore Power Detection

When the G12 is receiving +12V on Connector J5 Pin 8, for the shore power detection, AGS will remain in the off state until shore power is disconnected.




Gen Start

Gen Stop

Note (Allegro):

Please note that the Spyder system in the 2023 Allegro Open Road in no way decides when the batteries should merge. Any auto merge functionality comes from a non-Spyder source in the coach. The BDC2 only receives inputs and in direct response outputs 12V+ to the Merge Solenoid.

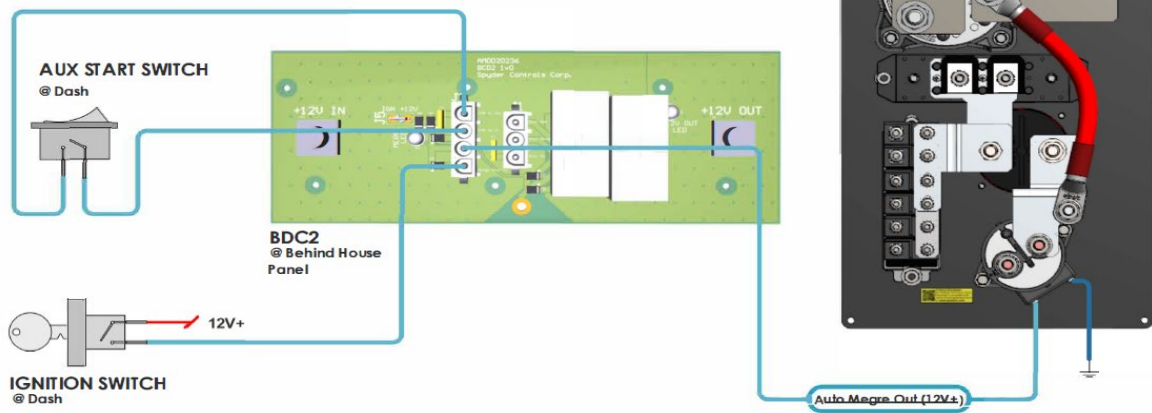

SLIDE-OUT FEATURES

Chapter

10

SLIDE-OUT OVERVIEW:



CAUTION

BEFORE ACTIVATING THE SLIDE-OUT FEATURES, read the slide-out instruction manual first. The motorhome must be parked; the ignition switch must be in the ON position and the leveling jacks must be used to level the motorhome **PRIOR** to activating the slide-out features. The emergency foot brake and parking brake must be engaged. Be sure the front driver's seat is moved forward before opening the slide-out.

GENERAL CONSIDERATIONS:

NOTICE

The slide-out room requires semi-annual inspection to ensure that the slide-out mechanism is properly aligned and functioning correctly. Make sure that this inspection is performed every six months to correct any possible misalignments.

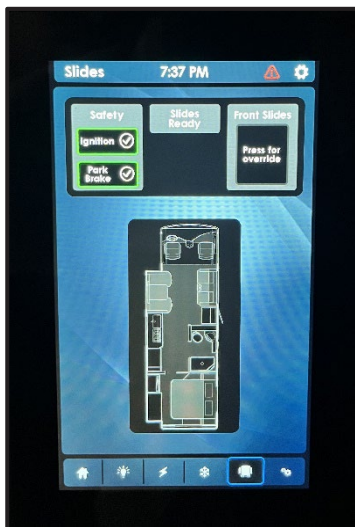


Figure 10-1: Slide-Out Screen on the Spyder Controls System

The slide-out-room feature is actuated by a screen on the Spyder Controls System (Figure 10-1). The Slide-Out Control Switch (Figure 10-2) must be manually held down in the desired position (either “in” or “out”) to activate the desired action of the slide-out room and continue to be held down until the desired action is concluded. Switches to operate the front slide-out rooms are also located on the cabinet above the driver's seat

NOTE: Releasing the switch before the slide-out is fully extended or retracted will stop the slide-out.



Figure 10-2: Slide-Out Control Switch

OPERATING PRECAUTIONS:

Before the slide-out-room mechanism is used, make sure the motorhome is parked, and the leveling process has been properly completed. Verify that no obstacles (branches, trees, telephone poles, power/water hookups, trash bins, etc.) are within a five-foot space envelope of the slide-out room, to keep from damaging the slide-out room when it is finally deployed.

NOTICE

Before attempting to extend the slide-out room, check outside and make sure that there is at least a five-foot clearance around the area where the slide-out room will be extended, and be sure the driver's and passenger's seats are moved to the forward position. Make sure the engine is operating and the batteries are not low.



Figure 10-3: Extend and Retract Slide-Out

EXTENDING THE SLIDE-OUT ROOM:

- All windows in the slide-out room (Figure 10-3) must be closed and secured before the slide-out room is to be extended or retracted. Also, any loose materials or possible obstructions, such as rugs or furniture must be removed from the immediate slide-out room area.
- Make sure that the motorhome has been leveled, that the battery is fully charged and connected to the electrical system, and that the ignition switch is ON, and the engine is running before attempting to use the slide-out features.
- Verify that there are no obstructions outside, which might interfere with the operation of the slide-out room.
- Before moving the slide-out room in either direction, make sure that the driver's and passenger's chairs are moved forward into the driving area as far as possible and locked into position.
- Make sure the parking brake is engaged.
- Push EXTEND on the Spyder Controls System and allow the slide-out room to go to its fully extended position. When fully extended, release the switch.
- The engine is running, and the batteries are not low.

RETRACTING THE SLIDE-OUT ROOM:

Before attempting to move the motorhome, the slide-out room must be fully retracted.

- Verify that the 12 VDC system is fully charged and connected to the electrical system.
- Make sure all personal equipment and any children are away from the slide-out.
- Make sure all cabinet doors around the slide-out areas are closed.
- Push RETRACT on the Spyder Controls System and allow the slide-out room to go to its fully retracted position.

NOTE: The front slide-outs can also be operated by pressing the buttons located in the cabinet above the driver's seats.

- Release the switch (this locks the room into position).

NOTICE

If the slide-out room does not move when the switch is depressed, check the following:

- Make sure the ignition system is turned ON.
- Make sure the park brake is engaged.
- Make sure the battery is fully charged and connected.
- Make sure the slide-out breakers haven't been "tripped." These are located in the storage box with the inverter or converter.
- Make sure the engine is operating, and the batteries are not low.


EMERGENCY SLIDE-OUT ROOM CONTROL OVERRIDE:

If the slide-out room controls become disabled inside the motorhome, use the emergency override to operate the slide-out rooms. The emergency override consists of set of push buttons on the M1 Circuit Panel that is installed within the M1-Spyder Enclosure. This enclosure is located inside of the front driver's side exterior compartment of the motorhome as shown in Figure 10-4. The push buttons operate all slide-out rooms simultaneously. To retract or to extend the slide-out rooms, a round dowel or cylinder (for example: barrel of a ball point pen) must be inserted in the holes marked RET or EXT; see Step 5.

To gain access to control override, see the following Steps 1 through 5:




Figure 10-4: M1 Spyder Enclosure located in the driver's side exterior compartment.

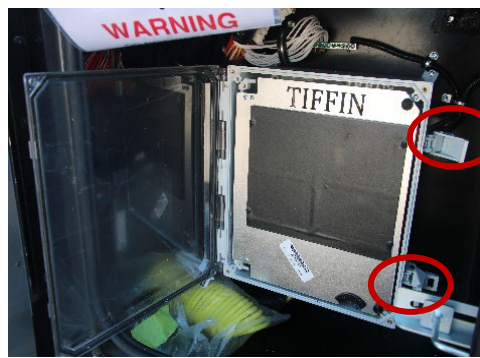


Step 1: Pull latches to open M1 Spyder Enclosure Door.




Step 2: Remove Thumb Screws to access M1 Circuit Panel.

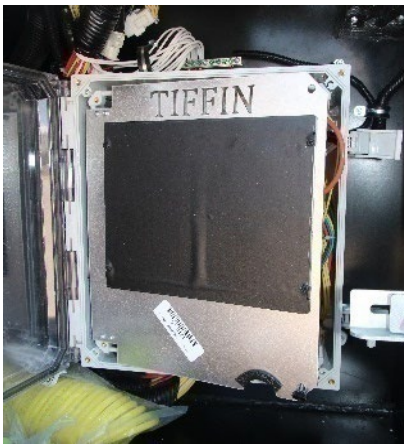

Step 3: With Thumb screws removed, Access M1 Circuit Panel.

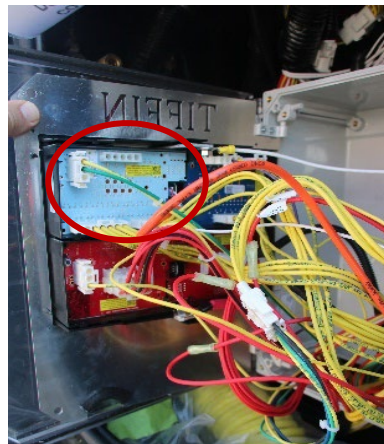

Step 4: Locate the M1 Circuit Panel.

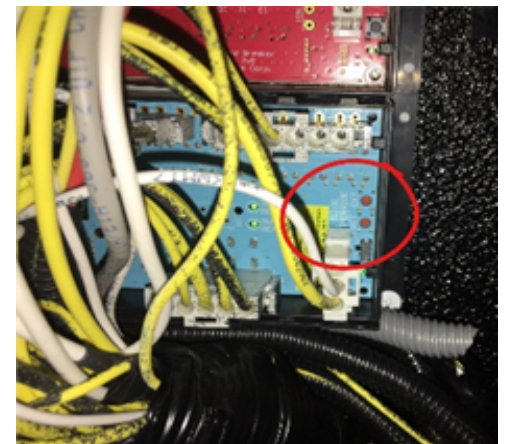

Step 5: Insert a round dowel in the control buttons to operate the Slide-Out Room.

EXTERIOR FEATURES

Chapter

11

TOWING HITCH:

On the rear of the Allegro is a 5,000-pound towing hitch (Figure 11-2) capable of handling a tongue weight of 500 pounds. This hitch is installed for towing a passenger car to be used when the vehicle is parked. The wire connector installed with this hitch is a standard, 7-pin connector.

NOTICE: If drop hitch or receiver extension is added to motorhome it reduces ton capacity by half.



Figure 11-1: Exterior Sides



Figure 11-2: Towing Hitch

EXTERIOR SIDES:

The sides of the motorhome (Figure 11-1) and the end caps are made of gel-coated fiberglass. To clean these fiberglass surfaces, use only warm water and a mild cleanser; gently wash with soft cloths. Use of stiff bristle brushes or other harsh abrasives might cause scratches on the fiberglass surfaces.

NOTE: Tiffin Motorhomes is NOT responsible for the weathering and/or oxidation of gel coated surfaces.

Spacious storage compartments are located on the exterior sides of your motorhome. These external compartments provide ample additional space for your belongings while you are traveling. When stowing materials in these storage compartments, try to “balance” the resultant weight load from front to rear and from side-to-side. This will keep the center of gravity of the motorhome essentially unchanged and should not adversely affect the handling characteristics of the motorhome when it is in motion.

SECURITY LIGHTS:

On the motorhome, exterior security lights (Figure 11-3) are standard features. The 2A light is installed on the passenger side of the coach to help light that side of the motorhome for added protection.

This light can serve as a “porch light” when the motorhome is parked, and the awning is deployed so that various activities (e.g., sitting outside, grilling, visiting) at dusk and later can be enjoyed by the motorhome owners and their guests.

ROOF & LADDER:



Figure 11-3: Exterior Security Light





Figure 11-4: Ladder



Figure 11-5: Receiver

The Allegro is manufactured with a fiberglass roof accessed by a ladder. Proper care and routine maintenance of your roof will ensure many years of trouble-free performance. The (Optional) **On-the-Go Ladder™** (Figure 11-4) is a fully adjustable and collapsible ladder with safety locks at each rung for extra security. The Ladder is designed to be used with the OEM-installed **On the Go Receiver™** (Figure 11-5) but can be used without the ladder receiver as a lean-to ladder. Additional information about this product can be obtained from [lci1.com/support](https://store.lci1.com/support) or by using the **LippertNOW** app. Replacement kits can be ordered from <https://store.lci1.com/> or by using the **LippertNOW** app. If you purchased a motorhome without the ladder option, Ladders can be ordered directly from Lippert Components (P/N: 2021126697).

 CAUTION	 WARNING
Do not exceed the maximum rating of the ladder (i.e., 300-pound load limit). Do not attempt to walk on the roof while either it is wet or when condensation is present from the air conditioning system as the roof surface will be quite slippery.	REMOVE AND STOW THE LADDER PRIOR TO TRAVEL. FAILURE TO PROPERLY REMOVE AND STOW THE LADDER COULD RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE.

ELECTRIC STEPS:

The motorhome is equipped with electric doorsteps (Figure 11-6). The switch (Figure 11-7) to operate these steps is located in the door stairwell. When the power switch for the steps is in the ON position, open the door, and the steps will automatically extend.



Figure 11-6: Electric Steps



Figure 11-7: Entrance Step Switch

USING THE ELECTRICAL, DOUBLE- ENTRANCE, DOOR STEPS:

With the step switch turned ON:

- Close the door. The step will retract and lock into the UP position.
- Open the door. The step will retract and lock into the DOWN position.
- Turn the vehicle ignition switch OFF and open the door. The step will extend and lock in the DOWN position.

With the step switch turned OFF:

- The step will remain in an extended position when the door is closed. Turning OFF the power with the step retracted will hold the step in a retracted position, as well.
- With the step extended, close the entrance door. Turn the vehicle ignition switch ON. The ignition override system will go into effect and the step will automatically retract.

NOTE: This feature is operational only the first time the door is opened after the vehicle ignition switch is turned OFF. When the ignition switch is ON, the step will always activate with the door movement, regardless of the position of the step power switch.



CAUTION

DO NOT travel with the steps or awnings in an extended position. If the motorhome is driven with the steps or awnings in an extended position, there is the possibility of causing major damage to the steps or awnings, and to the motorhome.

NOTICE

If the door is opened and closed without allowing the step to extend fully and lock in the DOWN position, the step will retract and lock in the UP position. When the door is re-opened, the step will not extend. The power switch must be turned ON for the step to extend.

Other exterior features include the power-assisted awnings (patio awning, door awning, or both). If available, they can be controlled from the switch console located in the stairwell of the motorhome.

NOTICE

Objects viewed in convex mirrors appear smaller and farther away than they actually are.



CAUTION

Always be sure to “look before you leap!” When opening the entrance door from the inside, be sure that the step is fully deployed before trying to step outside to avoid falling and possible injury.

MIRRORS:



Figure 11-8: Mirror

This motorhome is equipped with remote-controlled, exterior rear-view mirrors (Figure 11-8). Always adjust the mirrors for maximum rear visibility before driving. If another driver is to drive, be sure the mirrors are readjusted to accommodate the second driver. The mirrors are adjusted by using the multi-directional switch (Figure 11-9) located on the dashboard. Select the mirror to be adjusted by pointing the arrow in the direction of that mirror.

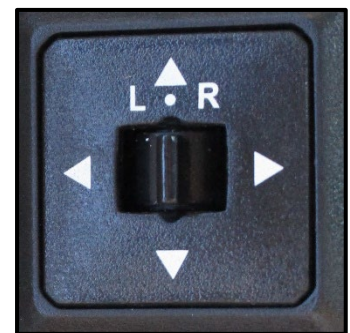


Figure 11-9: Mirror Adjustment Controls

Move the control in the direction of movement desired to obtain the best view for that mirror. The adjustment control moves the top half of both mirrors. **The bottom half of each mirror is convex and is adjusted manually.**

Detailed instructions for these manual adjustments can be found in the manufacturer's literature available in the Owner's Information Package; however, this brief overview of mirror

adjustment can begin the process: The top portion of the mirror must be adjusted horizontally so that you can see your own motorhome in the one-inch surface closest to the motorhome. The remaining portion of the mirror now enables you to see the road behind you. The mirror must be adjusted vertically so that you can see the rear bumper on the bottom of the plane portion of the mirror. The convex mirrors must be adjusted horizontally so that you can see the motorhome in 1/3 of the mirror. These convex mirrors must then be adjusted vertically to allow you to see any other vehicles alongside your motorhome.

These mirrors also contain heating elements to defog or de-ice the mirror glass during cold weather operation. The red ON/OFF switch for this feature is located by the adjustment control. Further adjustment of the mirror might be necessary at the swivel portion of the mirror arm.

INTERIOR FEATURES

Chapter

12

BEDSPREAD:

As a furnished part of the bedroom suite, a bedspread with matching pillow accessories (Figure 12-1) is included with the motorhome. The bedspread and pillow shams are “for dry-cleaning only.” As the bedspread was made with materials treated for stain resistance, dry-cleaning will prolong the life of these materials. The bedroom window shades are color-coordinated with the bedspread and accessories to provide a pleasing décor for the bedroom area.



Figure 12-1: Bedroom Décor

ELEVATED BEDS- CAUTION:



CAUTION

- **250 lbs. Max. load capacity**
- **Failure to comply with the load capacity could cause bed failure which may result in injury.**
- **Bed (s) must be stowed in the up position during travel.**
- **Elevated beds may present a fall hazard which may result in injury. Please consult the Owner's Manual for more information regarding elevated beds and the use of bed rails.**

Standard Elevated Beds – Various Tiffin products are equipped with standard built-in elevated beds or bed loft areas. These beds can be upwards of 4 to 5 feet above the floor level and are often enclosed on one, two, or three sides and sometimes even partially on a fourth side. Because there are so many potential users and different types of elevated bed designs, elevated beds are not equipped with bed rails.

Use of Bed Rails – We feel that you, as the customer, are best equipped to determine if a bed rail system is necessary or best for you based on your intended uses, the actual users of the elevated beds, and the comfort level of the users.

For those customers who would prefer using an elevated bed with a bed rail, there are numerous bed rail styles, sizes, heights, and designs available, even in the style of bumpers, which can be purchased at various retail locations and/or on the internet.

When installing a bed rail please make sure that you follow the manufacturer's installation instructions carefully and that you consider the size and height of the mattress (either originally installed by Tiffin or later replaced by you) so that the rails are the appropriate height above the top of the mattress. This is important because residential mattresses differ in size from the RV mattresses originally installed by Tiffin. **Please also make sure that the bed rail you select allows for adequate room to get in and out of the elevated bed after installation, especially in the event of an emergency.**

Tips for Safe Usage:

- Please use sound judgment when allowing children to sleep in any style of elevated bed. Generally, it is not suitable for children under the age of 6 to sleep in an elevated bed or bed loft area.
- Discuss proper usage of any elevated bed/electric bed lift system with your children and make sure they are supervised if they are playing in the bedroom/sleeping area of the trailer with elevated beds. Please do not allow horseplay on or under the elevated beds and no items such as hooks, belts, jump ropes, or towels should hang from any part of the elevated bed.
- Place a night light in the bedroom/sleeping area so users can see at night when getting in and out of the beds.

No more than one person should be in an elevated bed at once and make sure you follow the weight restrictions posted on the warning label near the beds.

FLOORING:




Figure 12-2: Flooring

LVT Flooring (Figure 12-2) is standard throughout the motorhome except for the slide-out rooms. The slide-out rooms have Infinity Woven Flooring as shown in Figure 12-3. For cleaning, routine sweeping and vacuuming the floor should be sufficient. If more thorough cleaning is warranted, the flooring can be cleaned with a damp



Figure 12-3: Infinity Woven Flooring

mop and water. For more stubborn stains, a mixture of soap-free household cleaner (e.g., vinegar, ammonia, or comparable products) and water can be used. Do not saturate the floor surfaces with water, as this could damage the flooring substrate. Do not use any abrasives (cleansers, scouring pads, and the like) as they can scratch or mar the flooring surfaces and might cause damage to the vinyl. If ceramic tile is chosen as an option, it may be cleaned more vigorously than the vinyl flooring.

CEILING/LIGHTING:



Figure 12-4: Ceiling

may be dimmed to desired level by use of the Spyder Control System (Figure 12-5).

The ceiling (Figure 12-4) in the motorhome is covered with a padded-vinyl headliner, which can be easily cleaned with a damp, soft cloth, and a mild detergent. Clean around all vent areas to prevent any build-up of dirt, grease, or other accumulations.

Lighting throughout the unit



Figure 12-5: Spyder Light Controls at the Front Entrance.

OVERHEAD BUNK BED:

Over the driver's cockpit is the optional overhead drop-down bunk bed; as shown in Figure 12-6. This bunk bed can be raised and lowered by operating the key control panel as shown in Figure 12-7. Key control operation instructions to lower the bunk bed:

1. Turn the key switch to the ON position.
2. Press and hold the DOWN arrow button. The bed will move until it reaches the pre-set stop position.
3. Release the DOWN arrow button and turn the Key Switch to the OFF position.

Key control operation instructions to raise the bunk bed:

1. Turn the key switch to the ON position.
2. Press and hold the Up-arrow button. The bed will move until it reaches the stop position. **NOTE:** The bed will stop moving when the button is released.
3. Release the Up-arrow button and turn the Key Switch to the OFF position.
4. **NEVER** apply additional weight to the bunk bed while in operation.



Figure 12-6: Bunk Bed Overhead



Figure 12-7: Controls

WINDOW TREATMENTS:



Figure 12-8 Day/Night Window Shades



Figure 12-9: Controls

Throughout the motorhome, the window treatments consist of two shades—solar and blackout (Figure 12-8).

The solar shade enables one to see out during the daytime yet blocks most of the sunlight and heat from entering the motorhome. The blackout shade creates complete privacy for nighttime.

Each shade can be raised and lowered by pulling down on the shade.

The shades are located on all the windows in the living area and the bedroom. A single shade is located in the window above the kitchen sink and the bathrooms. The driver's cockpit shades operate on a manual roller tube with a retention spring. The front windshield shades are operated by switches on dashboard; see Figure 12-9.

To operate the cockpit shades, pull the shade down to the desired level and slowly release to lock the shade in place. To retract, gently pull down on the shade and release.



CAUTION

DO NOT overextend the shade; this will damage the roller tube.

PLUMBING & BATH FEATURES

Chapter

13

FRESHWATER SYSTEM:

TANK-LEVEL MONITOR:

The Spyder Controls System tank-level monitor enables checking the approximate levels in the fresh, gray, and black-water holding tanks.

The fresh, gray, and black-water vertical columns on the display screen are sequentially arranged to indicate fluid levels in approximately one-third increments. As shown in Figure 13-1, the freshwater column displays approximately the tank water level at three-thirds full tank.

NOTE: The LP-gas level and battery voltage display for the chassis and house battery banks are available on the same screen.



Figure 13-1: Spyder Tank-Level Display



Figure 13-2: Kitchen Sink

KITCHEN SINK:

The kitchen sink (Figure 13-2) installed is a double-bowl sink equipped with a sink cover to provide additional counter space when the sink is not in use.

Wash the sink only with mild detergents and water and use a soft cloth for subsequent drying and polishing.



Figure 13-3: Bathroom Sink

BATHROOM SINK, SHOWER, & ACCESSORIES:

The motorhome is equipped with a shower and sink (Figure 13-3 and Figure 13-4). Use fiberglass cleaning or mild cleaning supplies to avoid scratching its surface. The typical bathroom accessories include a towel bar and a toilet paper holder.



Figure 13-4: Bathroom Shower

SHOWERMISER:

The Shower Miser Water Saving recirculator is a part of the shower system, as shown in Figures 13-5 and 13-6. It simply connects to your shower outlet. By flipping a small lever, you can redirect the cold water from the shower that would normally go down the drain, back into the fresh water tank. With its unique and patented color-change ability, it will notify you in under 4 seconds (at normal room temperatures) that hot water has arrived. Once the hot water is present, just flip the lever back to the showerhead and you have hot water ready to use.

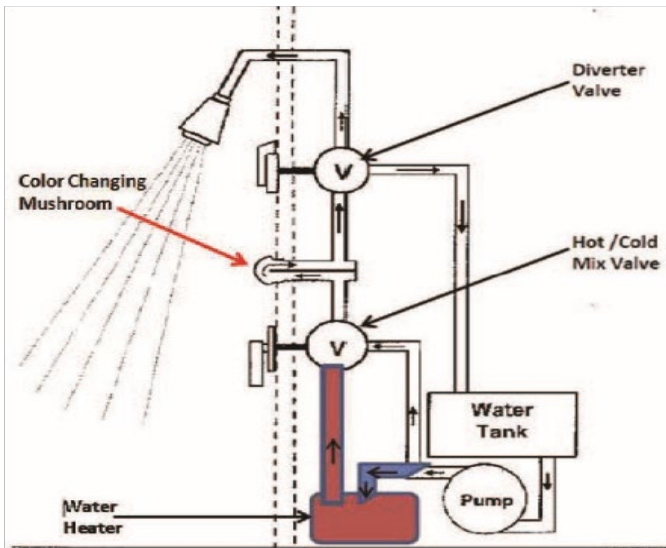


Figure 13-5: Shower Miser Diagram.



Figure 13-6: Shower Miser

NOTICE

Do not use the Showermiser when connected to city water. This will cause the fresh water tank to overflow.

NOTICE

Never allow the pump to run for long periods of time without water being present in the supply tank, as doing so might cause physical damage or blow fuses.

WATER PUMP:

The water pump is self-priming and totally automatic, operating on demand whenever water is required. The water pump is used to pressurize the freshwater system when the unit is not connected to city water. The switches are located in various conveniently located areas throughout the motorhome where water is accessible, or on the Spyder Controls System (Figure 13-7).

To start the pump:

- Fill or partially fill the fresh water supply tank.
- Open the kitchen and bathroom faucets.
- Turn the water pump switch to ON and allow the water to fill to the water line and the hot water heater.
- Close each faucet after it delivers a steady stream of water (close the cold-water faucet first). Leave the hot water faucets ON until they also deliver a steady stream of water. This procedure will ensure that the water heater is filled with water.

The water pump will stop running once all faucets are closed. The water pump is now ready for automatic operation. The pump will run when a faucet is open and stop when a faucet is closed. If water does not flow when a faucet is turned ON while using the demand system, use the following troubleshooting chart:



Figure 13-7: Spider Controls System Switch

SITUATION	SOLUTION
Pump running – no water	<ul style="list-style-type: none">• Fill Tank• Clear the water line to the pump
Pump does not run	<ul style="list-style-type: none">• Check the pump switch• Check the 12-volt fuses• Check the electrical connections• Check the battery



Figure 13-8: Motorhome Water Hose

All the water must be drained from the freshwater system when the unit is not in use for extended periods. For more detailed information regarding the water pump, refer to the water pump manufacturer’s brochure in your motorhome Owner’s Information Package.

CITY WATER CONNECTION:

When connecting your unit to city water, use the water hose (Figure 13-8) manufactured and labeled for potable water service—this will ensure that the hose selected for use will not alter the taste of the water. To connect the city water supply, connect one end of the hose to the city water supply. Turn the city water supply ON for a few seconds to clear the line. Once the hose has been flushed, turn

the supply OFF. Connect the other end of the hose to the city-water connection (Figure 13-9) on the motorhome. Once the city water fill valve is opened, water is supplied to the freshwater system including the hot water heater, faucets, and toilet. Turn ON the water supply and open all faucets to clear any trapped air within the plumbing lines within the motorhome.

Once any air pockets have purged from the water lines and water flows freely, close all faucets. The city water supply is pressurized; therefore, the water pump is not needed when the water system of the vehicle is connected to the city water system.

NOTE: If city water pressure is more than 60 psi, Tiffin Motorhomes recommends using a water pressure regulator to prevent damage to the motorhome.

FILLING THE FRESHWATER TANK:

The freshwater tank is normally filled from the city water connection. The yellow handle city water/tank fill valve determines whether the city water is going through the water system or into the freshwater tank. Since there is no automatic shut-off when filling the freshwater tank, check the level from the monitor panel while filling the freshwater tank on the motorhome.

The excess water will be vented from an overflow in the vent pipe onto the ground when the capacity of that tank has been reached. This pipe is installed in the freshwater tank to prevent possible tank rupture from inadvertent overfilling.

All water must be drained from the freshwater system when the motorhome is not in use for an extended period.



Figure 13-9: City Water Supply Connection

WATER FILTER:



Figure 13-10: Water Filter

This unit is equipped with a water filter (Figure 13-10), which must be removed before disinfecting the fresh-water system. First, remove the water filter and then replace the cover to allow the sanitizing solution access to the faucets. As installed, the filter will remove chlorine, dirt, and other matter. The filter will also eliminate most phenol (or similar) odors and tastes while delivering sparkling, taste-free water for drinking and cooking. The water filter is located in the sanitation compartment on the outside of the motorhome. The water filter is not guaranteed to remove the tastes and odors of iron and sulfur. To remove these impurities, you need to chlorinate the water. Replacement filters are available that will filter iron and sulfur. Ask your dealer or RV supply center about purchasing an iron and sulfur filter.

If you are traveling in an area, where the water has high iron and sulfur content, add one tablespoon of chlorine bleach to every 10 gallons of water in your tank—this will precipitate the iron or sulfur so that the filter can remove those impurities.

If you are at a site where the unit is connected to a city water supply, you will not be able to chlorinate the system because the water flows straight to your faucets and not through the freshwater tank. Filters must be changed every 6–12 months depending on the quality and quantity of water that is used in your motorhome.

SANITIZING:

To ensure complete disinfecting of the freshwater system, Tiffin Motorhomes recommends that the following procedures be performed on a new system, one that has not been used for a length of time, or one that might have become contaminated. This procedure is also recommended before long periods of storage, such as during the winter months:

- Drain the freshwater tank by opening the drain valve. All faucets should be in the closed or OFF position.
- Prepare a chlorine solution using one gallon of water and one-half cup of chlorine bleach (5% sodium-hypochlorite solution). Prepare enough of the chlorine solution to administer one gallon of solution for every 15 gallons of tank capacity. For sanitizing this unit, prepare 4½ gallons of the chlorine solution. This mixture puts a 50 ppm (parts per million) residual chlorine concentration in the water system that will act as a quick-kill dosage for harmful bacteria, viruses, and slime-forming organisms. Concentrations greater than 50 ppm might damage the water lines and/or the tank.
- Once the freshwater tank is empty, close the drain valves in the water tank.
- Pump the chlorine solution into the tank by taking the hose attachment and attaching it to the pump and then put in the chlorine solution. Close the valve from the fresh water tank to the pump and open the valve from the solution to the pump. Turn the tank fill valve from “city water” to “tank fill.” Turn ON the water pump until all of the solution is pumped into the fresh water tank.
- Turn OFF the water pump. Open the valve from the tank to the water pump. Fill the water tank with the city water tank fill (or by using the same method as was used to put the sanitizing solution into the tank). Remove the water filter (from the drink dispenser faucet, if installed). Open each faucet, in turn, including the kitchen faucet, bath faucet, and inside and outside showers, turning ON both the hot and cold faucets and flushing the toilet until all of the air has been purged from the pipes and the water runs freely. The entire system will then be filled with the sanitizing solution.
- Allow the 50-ppm disinfecting solution to stand in the system for at least four hours.
- Drain the system and flush it with freshwater. The water system needs to be flushed with water repeatedly, if necessary, until there is no chlorine taste or smell left in the system. To remove any excessive chlorine taste or odor that might remain, prepare a

solution of one quart of vinegar to five gallons of water. “Rock” the tank containing the solution by moving the vehicle forward and backward several times to clean the tank; then, drain that tank and refill with clean water.

WATER HEATER BYPASS SYSTEM:

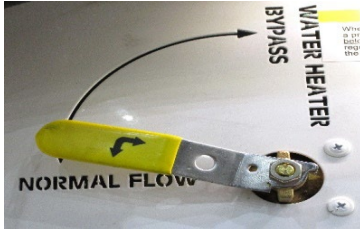


Figure 13-11: Water Heater Bypass System

The water heater bypass valve (Figure 13-11) is in the exterior water board next to the driver’s side storage compartments. This process is performed when winterizing your motorhome. Using the bypass valve will keep antifreeze out of the water heater when winterizing the motorhome. Draining the water heater during winterizing is **MUST**.

FRESHWATER LINES:

Check all the plumbing connections for leaks at least on an annual basis. If the water pump runs when all faucets are turned OFF, check for a possible leak. Be sure that the drain valves are closed. Connections at the kitchen and bathroom faucets normally seal by hand tightening them and then making an additional half-turn with a wrench.

If a fitting leak persists, disconnect it completely and visually inspect it for mineral deposits or foreign material stuck on the sealing surfaces. Clean the surfaces thoroughly and reinstall the fitting. Take the motorhome to an authorized Tiffin Motorhomes service center for additional repairs if the water system continues to leak.

Follow the winterizing instructions given in Chapter 16 to reduce the risk of leaks caused by cracks from freezing pipes. Left unchecked, freezing damage can be extensive and expensive.

WASTEWATER SYSTEM:

WASTEWATER GENERAL INFORMATION:

The waste drainage system was designed to provide adequate and safe storage and/or disposal of waste materials. All materials used in the fabrication of this system are tested by a nationally recognized testing laboratory. The drainage system uses plastic piping and fittings connected to the sinks, toilet, and holding tanks.

This plumbing permits the drainage of these fixtures to an outside termination. The vehicle should be reasonably level for the best operation of both wastewater systems.

There are two separate wastewater systems. The gray-water system is for wastewater from the sinks and shower. The black-water system is for sewage waste from the toilet. Each wastewater tank has its own control valve, and both tanks drain through a common sewer-drain hose.

NOTICE

It is important that you use as much water as possible when flushing to prevent tissue and other solids from clogging the holding tank outlet.

NOTICE

Do not use chlorine or caustic chemicals, such as bleach or drain opening chemicals in your motorhome's toilet. This will damage the seals in the toilet and dump valves.

TOILET:

The toilet (Figure 13-12) operates with water from either the fresh water tank with the water pump ON or the city water supply. Before using the toilet, add water to the bottom of the tank. Refer to the “Black-Water Holding Tank” instructions. The toilet flushes waste directly into the black-water holding tank.



Figure 13-12: Toilet Pedal
Flush Lever

When using your toilet, fill the toilet $\frac{3}{4}$ full of water. To add water to the toilet bowl, push the pedal lever $\frac{1}{4}$ of the way down to fill the bowl to the desired water level. To flush the toilet, push down on the lever until the water swirls. A small amount of water should remain in the bowl.

- The toilet must be cleaned regularly for maximum sanitation and operational efficiency. Clean the toilet bowl with a mild bathroom cleaner.
- When using your rear macerator toilet (if your coach is furnished with one) press the ADD WATER switch to fill the bowl to the desired water level. To flush the toilet, press the FLUSH switch, and then release it.

BLACK-WATER HOLDING TANK:

The “black-water” (i.e., sewage) holding tank is located directly beneath the toilet. Before using the toilet, you will need to treat the tank with water that is mixed with an odor-controlling chemical. These chemicals are readily available at any RV supply store. Pull the toilet levers forward to allow the chemicals to mix with the toilet water. Continue pulling the toilet levers until a depth of at least one inch of solution is directly under the toilet. Release the levers. The waste tank is now ready for use.

GRAY-WATER HOLDING TANK:

The gray-water holding tank is located in the underbelly of the vehicle. It is primarily used for the drainage from the kitchen and bath sinks, and the shower.

P-TRAPS:

Each of the sink drains and the shower drain has a water trap (P-trap) to prevent holding tank odors from entering the vehicle. These traps must have water in them to trap odors. When the vehicle is in motion, the water might splash out of the sink and shower drains. When the vehicle is stored, the water might evaporate from these traps, allowing odors to enter the vehicle. If this occurs, run water from the faucet into the drain, allowing water to fill the traps again.

WASTEWATER DISPOSAL:

NOTICE

Use only RV odor-controlling chemicals in the holding tanks. Products containing ammonia and petroleum will damage the ABS plastic holding tanks and seals.

Both holding tanks terminate in a valve arrangement that permits draining each tank separately or together. Drain the black-water tank first before draining the gray-water tank.

This procedure permits the water from the gray tank to wash the black-water residue from the drain lines and hose found in the external sanitation compartment.

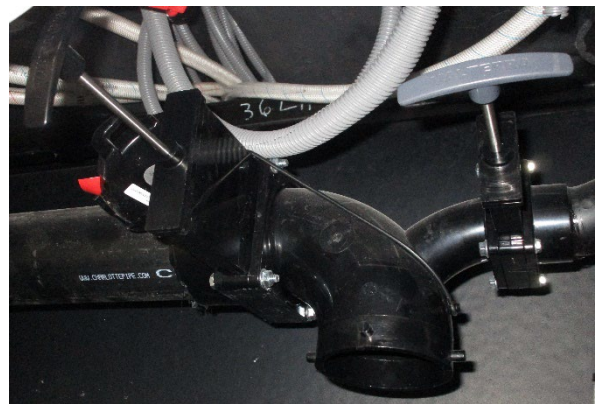


Figure 13-13: Sanitation Coupling

NOTE: The T-handles (Figure 13-13) are color coded to distinguish between the black-water holding tank and the gray-water holding tank. The black-water holding tank T-handle is black and the gray-water holding tank T-handle is gray.

The valves that open to release the water are called gate valves. The blade that closed the opening in the sewer drainpipes is connected to the T-handle to release contents of the tanks when pulled. The sewer line must be securely capped during self-containment use to prevent leakage of waste materials as shown in Figure 13-13. Do not pull the holding tank gate valve OPEN when the protective cap is installed on the pipe.

Always drain the tank into an acceptable sewer inlet or dump station. Whenever possible, drain both the holding tanks before traveling. The carrying capacity of your vehicle will be reduced if water is left in the black or gray tanks. The holding tanks must be drained only when they are at least $\frac{3}{4}$ full. Doing this will provide enough volume of water to allow the

complete flushing of waste materials in the drain lines and hose. If the tanks are not $\frac{3}{4}$ full, add enough water to allow for sufficient flushing.

To empty the wastewater tanks, connect the adapter supplied with your vehicle to the drain hose. One end of the hose threads up through the hole in the bottom of the service compartment and the other end of the hose feeds into the sewer at the dump station.

Unscrew the cap from the drain. Connect the hose, with the adapter in place, to the drain fitting. Open the gate valve completely by pulling on the T-handle. The tank will start to drain as soon as the T-handle is pulled. After you have drained the black-water tank, immediately drain the gray-water tank. This procedure helps to flush the black water from the sewage hose. When both the tanks are empty, flush them with a freshwater rinse before you close the valves. The gray tanks are flushed by pouring a couple of gallons of water into a sink drain. The drain outlet is engineered for quick release of the drain hose adapter. Always close the gate valves and secure the end cap to prevent leakage while the vehicle is in transit. After draining the black-water tank, add a holding-tank deodorant to help control the odor and break down the solids. Follow the instructions given on the holding-tank deodorant package.

SEWER CONNECTION AND CAMPING:

While using the motorhome, it is always important to keep the black-water holding tank gate valve closed, except when dumping. This allows an ample amount of liquid to remain in the tank to provide a smooth flow through the gate and the drain valves when dumping.

Enough liquid in the tank causes a swirling action that takes any accumulated solid waste with it. Accumulation of solid wastes in the black-water tank can be avoided by keeping the gate valve closed when connected to the sewer connection. The gray tank can be kept open while hooked to a sewer connection.

NOTE: Dump the black-water tank first, then the gray-water tank.

NO FUSS FLUSH:

As shown in Figure 13-14, this vehicle is equipped with a flushing system for the black-water holding tank. When draining your sewer tank, attach a water hose to the tank flush connection. After the tank is drained, leave the gate valve “open” and open the water valve to allow the water to spray inside the black-water tank. This will clean the inside of the tank of any debris that might be left inside the tank. After this procedure is done, disconnect the freshwater hose and close the gate valve.



Figure 13-14: Tank Flush Connection

NOTICE

Be sure the gate valve is OPEN when flushing the tank. Do not use the same hose that is used for filling the fresh water tank for the No Fuss Flush.

EXTERIOR SHOWER



Figure 13-15: Exterior Shower and Shower Light

The motorhome has an exterior shower (Figure 13-15) for your use and convenience outside the motorhome. The exterior shower is located in the water board compartment on the driver's side. The shower enables you to do such things as rinse off sand or grass, muddy shoes, or bathe yourself outside of your motorhome. The faucet operates just as it would in the kitchen or bathroom. There is also a soap dispenser and light conveniently located in the compartment.

WINDOWS, AWNINGS, VENTS, & DOORS

Chapter

14

WINDOWS:

Vent windows (Figure 14-1) are custom built for the motorhome and allow access to fresh outside air. There may also be a reflective coating on the windows to reflect a portion of the sunlight to reduce the heating of the motorhome interior and to reduce the effects of the sun's "bleaching" of interior fabrics (bed linens, upholstery). Sunshades on both the driver's and passenger's sides can be deployed and moved at any time. Windows throughout the motorhome are designated as "EXIT" windows in the event of an emergency. To help make the window slide more easily, Tiffin Motorhomes recommends using Plexus Plastic Cleaner, which can be purchased through the Tiffin Motorhomes Service Department.



Figure 14-1: Motorhome Windows

AWNINGS:



Figure 14-2: Power Patio Awning

The power patio awning (Figure 14-2) is standard on the Allegro. The power patio awning is extremely durable and can be operated during light rain and wind conditions. However, **when periods of heavy rain, or wind is expected, or you leave the awning unattended, the awning should be closed. Note that damage caused by wind and rain is not covered by warranty.** To operate the awning, follow the instructions listed below.

To open the awning:

- Locate the Remote Switch (Figure 14-3) front Overhead cabinet above driver's seat.
- Press the OUT button and the awning will automatically open.
- Verify that the valance is in the correct orientation (see awning instructions found in the Owner's Information Package). Tap the rocker switch in the IN direction to adjust the valance orientation if



Figure 14-3: Awning Control Switch

necessary. Allowing the valance to remain in the hyper-extended orientation might create a propensity to pool water, especially in larger (17'-21') awnings.



WARNING

Pinch Hazard. When closing the awning, the bottom arm will fold down and against the back channel. This area must be kept clear of people and objects. Failure to heed this warning could cause severe personal injury and/or property damage.



WARNING

Since damage resulting from weather is not under warranty, anytime a heavy or prolonged rain or blustery winds are anticipated, close the awning. Similarly, if the awning is to be left unattended for any prolonged length of time, close the awning.

To close the awning:

- Locate the Remote Switch (Figure 14-3) in overhead cabinet above driver.
- Press the RETRACT button to automatically close the awning.

In case of awning power failure or to manually close the awning:

The Girard GG750 has a manual override to close the awning in case of power failures. Remove the endcap opposite the motor by removing the 3 Philips head screws; see Figure 14-4.

- Using a 13mm wrench, turn the square manual override shaft to close the awning, see Figure 14-4. NOTE: The manual override is one-way, it can only be used to close the awning.
- Replace the endcap using the 3 Philips head screws.
- Figure 14-4 shows a right-hand motor version of the GG750. If your coach is equipped with a left-hand version, the manual override will be on the opposite side.
- Once power is restored, the awning will resume normal operation.

NOTE: This procedure can also be used to manually retract the over the door awning. Connect the user-supplied wire leads to the terminals in the connector from the motor. Electrical tape might be required to keep the wire leads in place. (Do not connect to the one in the hardware). Connect the other end to a 12 VDC battery source.

The red wire goes to + and the black to -. If there is not a problem with the awning motor, this will retract the awning.

To avoid motor damage, disconnect the battery source immediately after the awning is fully retracted. The awning can be extended by reversing the polarity. Place the red wire on the - and the black wire on the +. Disconnect the battery source after the awning is fully extended.

If the awning will not retract after performing the steps listed above, perform the following steps:

- Slide the pull strap (provided) into the utility slot of the FRTA (see awning instructions found in the Owner's Information Package.)
- While one person is holding onto the pull strap, remove the screw in the top of the right top casting. The FRTA will immediately roll in once the bolt is removed. Walk the awning to the closed position.
- Align the hole where the screw was removed and replace the screw into the top casting to secure the awning.

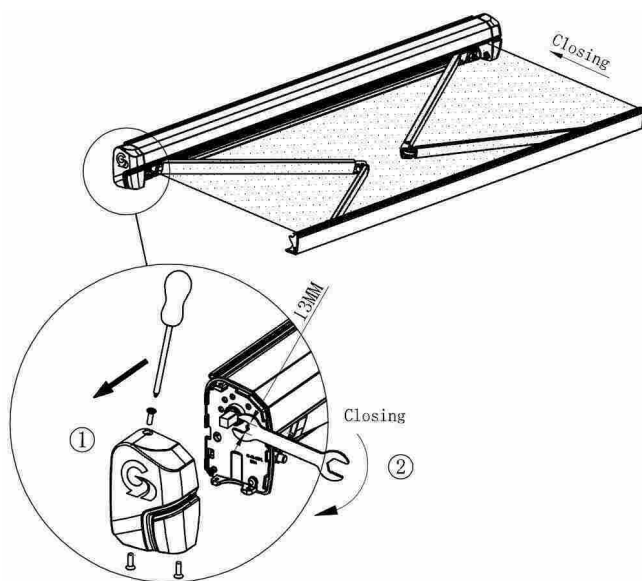


Figure 14-4: Manual Override



WARNING

In case of power issues, the GG750 has a manual override to close the awning. Remove the endcap opposite the motor, by removing the 3 Philips head screws.

1. Using a 13mm wrench, turn the manual override shaft to close the awning, see Figure 10. NOTE: The manual override is one-way, it can only close the awning.

2. Figure 14-3 shows a right-hand motor version of the GG750. If you have a left-hand version, the manual override will be on the opposite side.

NOTE: The screw removed from top of right casting must be reinstalled. This is to prevent the awning from opening during travel; personal injury or damage can occur. Have the awning serviced by a Girard Service Center or a qualified service technician before attempting to open the awning after this procedure has been performed.

VENTS:

The kitchen and bathroom are both equipped with a 12 VDC exhaust vent (Figure 14-5). The fans are controlled by the fan tab on the

Spyder Controls System (Figure 14-6). A three-speed switch on each vent fan controls the fan speed.



Figure 14-5: Overhead Vent Fan



Figure 14-6: SpyderVent/Fan Controls

IMPORTANT: The vent fan must be left in the ON mode only when the motorhome is parked and in use. The fan will not operate until the vent is open.

DOORS:

The primary entrance door to the motorhome has a key lock and a dead bolt for additional security. When the door is fully opened, the door hinge automatically holds the door in an OPEN position. There is also a screen that allows increased air circulation when the entrance door is open.



WARNING

Always secure the dead bolt lock while the motorhome is in motion to prevent accidental opening of the entrance door.

DRIVING YOUR MOTORHOME

Chapter

15

ECOMASTER CAMERA MONITOR SYSTEM:



Figure 15-1: Rear /Side View Monitor

the rear-mounted camera only when the transmission is in REVERSE gear. To use this system effectively, refer to the owner's manual for this system. The monitor system manual is in the Owner's Information Package.

The Rear/Side View Monitoring System (Figure 15-1) provides aid for the driver in backing and parking the motorhome.

A camera mounted on the rear of the vehicle feeds a televised view of the rear of the motorhome to the monitor located dashboard.

If the switch is in the MANUAL mode, the monitor will be ON when the ignition switch is turned ON. If the switch is in AUTOMATIC mode, the monitor will display the picture from

BASIC REAR VIEW CAMERA OPERATION:

- Depress the POWER switch. The picture appears on the monitor. POWER indicator lights up green. To turn off the picture, press it again to release. The monitor moves to standby condition. POWER indicator lights up red.
- Adjust the VOLUME control.
- Adjust the picture contrast and brightness. The DAY/NIGHT selector switch must normally be kept in the DAY (released) position. When you view the picture at night or in a tunnel, etc., depress the switch to make the picture less bright (therefore in the NIGHT position). Thus, the picture will be easy to view even in a dark place.

When you set the gear level to the "R" position with the POWER switch released, the monitor is turned ON, and the picture from the camera connected to the CAMERA "A" connector appears irrespective of the INPUT knob setting.

SIDE-MOUNT CAMERA:

The side-mounted cameras are activated whenever the motorhome in transit begins to make a turn. When the LEFT turn indicator is used, the left-side camera is activated, and that camera displays on the back-up monitor a rearward-oriented view of the driver's side showing that side of the motorhome and a limited panorama of what is alongside and immediately behind the motorhome as it begins to turn into that direction.

In this manner, the typical "blind spot" of most motorhomes is drastically reduced or eliminated so that the driver can make those turns with great confidence. Similarly, the "right" turn indicator operates in the same manner to show a rearward view of the right side of the motorhome when a right-hand turn is made.

AM/FM STEREO SYSTEM:

An AM/FM stereo system (Figure 15-2) is included in the motorhome. This system is powered by the 12-volt DC system of the motorhome and operates like any conventional car stereo system. The coach is also SIRIUS XM compatible with a subscription.

DASHBOARD HEATING/COOLING CONTROLS:

The dash air conditioner/heater (Figure 15-3) is not designed to heat and cool the entire interior of the motorhome. It is intended only to provide heating and cooling for the cab area. A small amount of air will blow out of the defrost and dash vents regardless of the mode settings.

AUTOMATIC LEVELING SYSTEM:

The Allegro is equipped with HWH Electronic Leveling System (Figure 15-4)

To operate the automatic hydraulic leveling mode:

- Set the Park Brake. The engine must be operating.
- Press the AUTO LEVEL button once. The leveling system active light will flash.
- During the automatic leveling sequence, after the system has extended the appropriate jacks to level the vehicle and has turned the yellow indicator lights off, the system will stabilize the vehicle.

To retract the jack in automatic hydraulic leveling mode:

NOTE: When the jacks are stored with the ignition in the ON position, the warning buzzer will sound until the jacks have retracted to the STORE position. If desired, the jacks can be stored with the ignition key in the accessory position. This will eliminate the warning buzzer while the jacks are retracting.

- Press the AUTO STORE button. The store indicator light will flash. The front jacks will retract for five seconds before the rear jacks will begin to retract. As each jack retracts, its red WARNING light will go out. The system will automatically shut down one minute after the four individual red WARNING lights are out. If any one red WARNING light

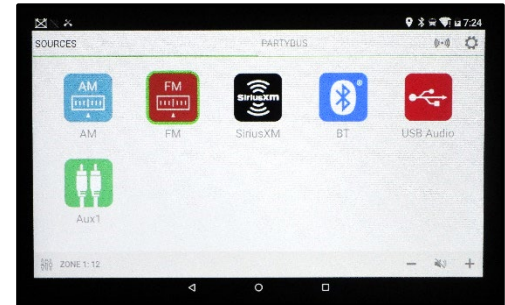


Figure 15-2: Stereo System



Figure 15-3: HVAC Controls



Figure 15-4: HWH Control Panel

does not go out, the system will continue to store for 50 minutes, then shut down regardless of the WARNING lights condition.

- The vehicle can be moved as soon as the red warning lights are out.


To operate in Manual mode:

- Set the park brake and make sure the engine is running.
- The motorhome may be leveled using the manual EXTEND (UP ARROW) buttons on the right half of the panel. If a yellow LEVEL SENSING light is on, that side, end or corner of the vehicle is low. It is best to level the vehicle side-to-side first, if needed, before front to rear.
- When leveling is completed, turn the ignition switch to the OFF position.

To retract the jack in manual leveling mode:

Turn ignition to the ON position and push the STORE button. To manually override the jack system in the event of a power failure; Refer to the HWH manual in the Owner's Information Package and follow the instructions. Retract slides prior to storing jacks. Reverse order can cause fault on Control panel.

WINDSHIELD WIPER OPERATION:

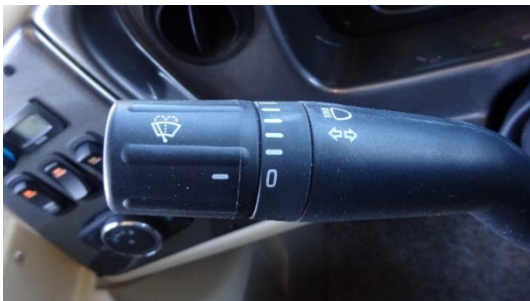

The controls to operate the windshield wipers are located level on the left side of the steering column. The wipers are not “automatic.” They do not come on simply by water touching the windshield. They must be manually turned on and off using the controls as shown in Figure 15-5.

Figure 15-5: Wiper Controls

ROUTINE MAINTENANCE

Chapter

16

WASHING:

The paint on your Tiffin motorhome has a polyurethane base called Diamont™. While multiple layers of clear coat sealants protect the paint against oxidation, the sealant must be protected from deterioration (Figure 16-1).

Paint manufacturers advise against using harsh cleaners such as Simple Green™, Mr. Clean™, or liquid dishwashing soaps. The degreasing agents in these cleaners leave a residue on the sealant, which soften and damage the clear coat in time.

Baby shampoo provides an effective yet gentle cleaner. Without the typical heavy degreasers of most detergents, baby shampoo cleans without leaving a residue to gum up the clear coat finish. Generally, one ounce (1 oz.) is all you need per five-gallon bucket of water. Add one cup of food grade distilled white vinegar to your wash bucket.

Tiffin Motorhomes recommends the lamb's wool pad sold by Mary Moppins™. This enables you to safely wash your coach from the ground by placing the pad on an extension. Do not mistake lamb's wool with imitations. Imitation pads are made from 100% polyester, which is plastic. Plastic imitations will scratch the finish of the motorhome. For this same reason, avoid microfiber products to wash or dry your motorhome. Microfiber is made from 80% polyester.



Figure 16-1: Typical Motorhome Exterior



CAUTION

DO NOT use any type of brush or plastic washing materials on the exterior paint as this could cause damage to the finish of your motorhome. Even though you might not see brush marks now, the damage will happen as the bristles wear down.

NOTICE

Damage caused by improperly performed maintenance or inadequate maintenance is not covered by your Tiffin Motorhomes limited warranty.

Use only 100% cotton towels to dry your vehicle. Adding vinegar to your wash water and washing in the morning or evening will help prevent water spots. Water spots damage the exterior of your coach the same way they damage glass shower doors. They etch their way into the surface and removal becomes difficult. Prevention becomes the key. Wash one side at a time, rinse, and then dry quickly using a squeegee followed by a towel placed over the

cleaning head. To remove oil and grease, remember an important rule of cleaning: give your product time to work. Dab a bit of concentrated cleaner like CleanEz by Mary Moppins™ never an orange-based cleaner or one with petroleum distillates—onto a soft cloth. Apply to the oil spot and wait for 10 to 15 minutes before rubbing lightly to remove the oil. Rinse immediately.

NOTICE

Do not use solvents such as acetone, MEK, toluene, and the like on the decals. Any solvent including alcohol might soften and smear colors. Do not use lacquer thinner or paint thinner on decals. Do not overcoat the decals with clear paint. Do not allow gasoline or other fuels to come into prolonged contact with the decals. However, if this should occur, immediately flush the affected area with water.

SEALS:

The seals around the doors, windows, vents, slide-out trim, and external seams must be checked at least semi-annually. Additionally, the roof seams must be inspected for cracking or peeling semi-annually. If deterioration is noted during a routine maintenance inspection, reseal the seams or seals with an approved sealant to prevent leaks. Your Tiffin Motorhomes dealer can perform resealing inspections and subsequent work for you. Tiffin Motorhomes recommends that a Tiffin Motorhomes authorized service center perform these inspections periodically and perform necessary resealing when necessary.

PROPER SEALANTS FOR APPLICATION:



The following sealants are recommended for specific sealing applications, as noted in the table. These can be purchased through the Tiffin Motorhomes parts and service department by calling 256-356-0261.

RECOMMENDED SEALANTS FOR SPECIFIC SEALING APPLICATIONS	
SEALANT	APPLICATION
Plas-T-Code	Metal or fiberglass roof
Surebond #SB-140	Rubber laminated to metal roof and ALL SKYLIGHTS
Carlisle #502-LSW self-leveling sealant	Rubber roof over wood base
Silicone sealant	To cover butyl and other sealants; not to be used as the main sealant
Parbond	To seal across tops of windows on exterior surfaces where silicone is not used

WHEEL CARE:

The care and maintenance of your wheels are simple and require no special material or products; follow the directions included in the Owner's Information Package for these. Timely care and cleaning will maintain the appearance of these wheel products for many years.

Be sure to completely wash the aluminum wheels free of all road treatment salt or other chemicals, paying close attention to the area behind the decorative lug nut covers.

 CAUTION	 WARNING
Do not use harsh detergents, acids, or abrasives, which might scratch or dull the surfaces. The applicator cloth, sponge, or soft-bristled brush must be non-metallic and non-abrasive. Also, remember to check the tightness of the wheel lug nuts frequently.	Use caution when working on the top of your motorhome. The wet roof might be extremely slippery and, as such, a possible safety hazard.

ROOF CARE & MAINTENANCE:

Proper care and maintenance of your motorhome, including your roof, is important for sustained, trouble-free performance. Normal maintenance is simple and easy and does not require special materials.

The roof of the motorhome is fiberglass and can be cared for in a conventional manner. Clean the roof at least every three months. The roof must be professionally inspected by a dealer annually.

MOISTURE MANAGEMENT:

This section outlines important recommendations to manage moisture in your motorhome to avoid moisture-related damage, such as mold. The materials and methods used to construct your motorhome were selected in part to minimize air leakage and to create a weather-tight exterior shell. However, to protect your investment and reduce the risk of moisture-related damage and costly repairs, attention and care must be taken to manage moisture inside your RV.

NOTE: These are only suggestions intended to minimize moisture-related issues with your motorhome. If any concerns arise, contact Tiffin Motorhomes' Service Department at (256) 356-0261.

INTERIOR CARE OF YOUR MOTORHOME:

Signs of excessive moisture can be obvious, such as water droplets forming on surfaces or wet carpet. Conversely, signs of excess moisture can be subtle, such as condensation forming on metal surfaces. When symptoms appear, it is important to immediately determine the cause of the excess moisture and take appropriate corrective action to prevent moisture-tight damage.

CONTROL RELATIVE HUMIDITY:

Monitoring and controlling relative humidity within the motorhome are one of the most important steps to minimize the risk of moisture-related damage. Ideally, relative humidity should be at 60% or less. Relative humidity can be monitored utilizing a portable hygrometer, which is a small device that measures temperature and relative humidity.

Use exhaust fans, the air conditioner, and/or a portable dehumidifier to manage moisture inside the motorhome to maintain relative humidity at 60% or less. In cold climates, relative humidity might need to be at 35% or less to avoid window condensation issues. If the motorhome is used, most of the time in a hot, humid climate, it might be difficult to keep relative humidity below 60%. A dehumidifier will help but check the condensation (water) collection bucket regularly or discharge the condensation (water) directly to a drain.

AVOID DRASTIC THERMOSTAT SETBACKS:

To minimize the opportunity for condensation to form on interior surfaces, maintain a comfortable temperature in your motorhome, and avoid nighttime setbacks of 10 degrees or more. Drastic setbacks that reduce the indoor air temperature quickly can increase the chance for airborne moisture to condense on cool surfaces such as windows. If you are away from your RV for an extended number of days, do not set the temperature back without taking other measures to manage relative humidity, including operating a dehumidifier with a continuous drain.

MANAGE WINDOW CONDENSATION:

Window condensation issues can be identified by water or ice build-up, usually at the base of the window. Most of these problems can be addressed by managing the moisture generated inside the motorhome. Minor condensation issues are not unusual, especially for RVs used in colder climates. To help minimize window condensation, use exhaust fans vented to the outside, avoid drastic changes in thermostat settings, do not use “vent-free” heaters, and use window coverings wisely. For example, make sure to open curtains or blinds during the day to allow air to circulate and warm the window surface.

CARPET CARE AND MOISTURE MANAGEMENT:

The carpet must be cleaned when it shows signs of discoloration or traffic patterns. A steam cleaning system must be used to clean the carpet unless otherwise noted in your warranty

information. To manage moisture from the cleaning process, the cleaning system needs to be capable of extracting the excess water from the carpet after it has been cleaned.

IMPORTANT: Be sure the carpet is thoroughly dry before closing the RV for storage. Water from the cleaning process can cause significant damage to the RV if the carpet is not completely dry before closing the motorhome for an extended period.

CLEANING FLOORS:

Most floors only require a mild detergent and warm water for cleaning. More water on the floor is not always better for cleaning. Use a damp cloth to clean on a regular basis rather than wet mopping each time.

STORAGE AND OTHER ISOLATED AREAS WITHIN THE MOTORHOME:

Storage areas are more difficult to condition since the areas are isolated from the main body of the motorhome. The surfaces of these areas are more at risk for condensation and surface mold growth. To minimize this risk, clean storage areas regularly, and allow air space between stored items and the exterior wall to promote air circulation.

USE OF UN-VENTED COMBUSTION EQUIPMENT:

Un-vented combustion equipment, such as propane stovetops are a source of moisture within the motorhome. For every gallon of fuel consumed, approximately one gallon of water vapor is evaporated into the air. Whenever possible, operate an exhaust fan in combination with the use of any un-vented combustion appliance within the motorhome. Water vapor and other combustion by-products must be vented to the exterior of the motorhome. The motorhome owner must strictly follow use and maintenance instructions for safe operation of any combustion equipment, particularly un-vented equipment.

EXTERIOR CARE OF YOUR MOTORHOME:

The exterior shell of the motorhome is the primary weather and moisture barrier. Over the life of the vehicle, the shell will require regular care and maintenance in accordance with other instructions for exterior care. The shell includes the roof, sidewalls, windows, doors, and under-floor of the motorhome. Attention needs to be devoted to ensuring these components are maintained to ensure a tight barrier against bulk water intrusion. The shell must be inspected periodically for tears, gaps, and condition of sealants in accordance with this owner's manual. Areas that require maintenance must be resealed using a similar, high-quality sealant used by the manufacturer. Attention must be devoted to ensuring the slide outs are functioning properly. Each time a slide out is used, it must be inspected to ensure proper operation and sealing. The slide out gaskets must also be inspected to ensure proper sealing when the slide out is operated.

USE OF YOUR MOTORHOME:

The square footage of a motorhome is significantly less than that of a single-family residence. This fact alone will elevate the relative humidity because there is less volume of air to help absorb or dissipate the humidity. For example, showering and cooking create a lot of humidity in a small area. In these instances, use of an exhaust fan and opening windows should reduce the relative humidity, particularly when living in the motorhome for an extended period.

SEVERE ENVIRONMENTS:

Prolonged use of your motorhome in severe environments, for example in extremely cold or hot-humid climates, will require extra care and maintenance to avoid moisture-related issues. In both extremely cold and hot humid climates, more attention needs to be focused on controlling the relative humidity within the motorhome. It also might require the use of a portable dehumidifier to manage the relative humidity within an acceptable range.

STORAGE OF YOUR MOTORHOME:

During periods when your motorhome is not in use, care must be taken to ensure that moisture sources are addressed. Ideal storage of your motorhome would be in an enclosed, climate-controlled environment. If this is not possible, the following steps must be taken to ensure moisture is controlled:

- Turn off all water sources.
- Turn off all combustion appliances.
- Drain the water tanks.
- Drain the water heater.
- Open all closets, cabinet doors, and drawers.
- Close all windows and entrance doors.
- Open a vent or a window enough to allow for some limited ventilation airflow, but not so far as to allow snow or rain to enter.
- When storing the RV in high humidity climates, add a dehumidifier drained to the exterior to control the humidity inside the motorhome during storage.
- Refer to other sections of this owner's manual for additional recommendations.

MODIFICATIONS TO YOUR MOTORHOME:

Consult Tiffin Motorhomes for guidance before making any modifications to your motorhome. It is important that changes be completed by a qualified service firm to ensure that moisture intrusion or accumulation problems do not occur.

WET AREAS:

Areas that are exposed to water spills or leaks must be dried as soon as possible and within 24 to 48 hours. Drying areas quickly minimizes the chance for moisture damage and possible mold growth, which can begin to form colonies within 48 hours. A variety of methods can be used to help the drying process:

- Remove excess water with an extraction vacuum.
- Use a dehumidifier to aid drying.
- Use portable fans to move air across the surface.
- Because moisture is key to mold issues, treat all signs of condensation and spills seriously and deal with them promptly. Failure to deal with a moisture issue promptly might cause more severe issues where none initially existed or might make a small problem much worse.
- Learn to recognize signs of mold—do not paint over or cover up suspicious discoloration until you are sure it is not mold. The affected surface must first be cleaned and dried; residual staining may be painted.
- Be sure to understand and eliminate the source of moisture accumulation as a part of the cleanup. Otherwise, the same issues will reoccur.
- Small amounts of mold must be cleaned as soon as it appears. Small areas of mold must be cleaned using a detergent/soapy solution or an appropriate motorhome household cleaner. Gloves must be worn during cleaning. The cleaned area must then be thoroughly dried. Dispose of any sponges or rags used to clean the mold.

TIRE & SAFETY INFORMATION:

This portion of the Owner's Manual contains tire safety information as required by 49 CFR 575.6. The National Traffic Safety Administration (NHTSA) can be contacted at 1-888-327-4236. Their website is <http://www.safercar.gov> and their address is NHTSA, 400 Seventh St, S.W., Washington, D.C. 20590.

SECTION ONE:

The National Traffic Safety (NHTSA) has published a brochure (DOT HS 809 361) that discusses all aspects of Tire Safety, as required by CFR 575.6. This brochure is reproduced in part below. It can be obtained and downloaded from NHTSA, free of charge, from the following website: <https://one.nhtsa.gov/cars/rules/TireSafety/ridesonit/brochure.html>

Studies of tire safety show that maintaining proper tire pressure, observing tire and vehicle load limits, avoiding road hazards, and inspecting tires for cuts, slashes, and other irregularities are the most important things you can do to avoid tire failure, such as tread separation or blowout, and flat tires.

These actions, along with other care and maintenance activities, can also:

- Improve vehicle handling.
- Help protect you and others from avoidable breakdowns and accidents.
- Improve fuel economy.
- Increase the life of your tires.

This section presents a comprehensive overview of tire safety, including information on the following topics:

- Basic tire maintenance.
- Uniform Tire Quality Grading System.
- Fundamental characteristics of tires.
- Tire safety tips.

Use this information to make tire safety a regular part of your vehicle maintenance routine. Recognize that the time you spend is minimal compared with the inconvenience and safety consequences of a flat tire or other tire failure.

Safety First—Basic Tire Maintenance:

Properly maintained tires improve the steering, stopping, traction, and load-carrying capability of your motorhome. Under-inflated tires and overloaded motorhomes are a major cause of tire failure. Therefore, as mentioned above; to avoid flat tires and other types of tire failure, you must maintain proper tire pressure, observe tire and motorhome load limits, avoid road hazards, and regularly inspect your tires.

Finding Your Motorhome's Recommended Tire Pressure and Load Limits:

Tire information placards and vehicle certification labels contain information on tires and load limits. These labels indicate the vehicle manufacturer's information including:

- Recommended tire size.
- Recommended tire inflation pressure.
- Vehicle capacity weight (VCW—the maximum occupant and cargo weight a vehicle is designed to carry).
- Front and rear gross axle weight ratings (GAWR—the maximum weight the axle systems are designed to carry).

For motorhomes: Both placards and certification labels are on a sticker that is located in the rear closet.

Understanding Tire Pressure and Load Limits:

Tire inflation pressure is the level of air in the tire that provides it with load-carrying capacity and affects the overall performance of the motorhome. The tire inflation pressure is a number that indicates the amount of air pressure—measured in pounds per square inch (psi)—a tire requires to be properly inflated. (You will also find this number on the motorhome information placard expressed in kilopascals (kPa), which is the metric measure used internationally).

Vehicle manufacturers determine this number based on the vehicle's design load limit, that is, the greatest amount of weight a vehicle can safely carry, and the vehicle's tire size. The proper tire pressure for your motorhome is referred to as the "recommended cold-inflation pressure."

Because tires are designed to be used on more than one type of vehicle, tire manufacturers list the "maximum permissible inflation pressure" on the tire sidewall. This number is the greatest amount of air pressure that can ever be put in the tire under normal driving conditions.

Checking Tire Pressure:

It is important to check your motorhome's tire pressure at least once a month for the following reasons:

- Most tires naturally lose air over time.
- Tires can lose air suddenly if you drive over a pothole or other object, or if you strike the curb when parking.
- With radial tires, it is usually not possible to determine under-inflation by visual inspection.

For convenience, purchase a tire pressure gauge to keep in your motorhome. Gauges can be purchased at tire dealerships, auto supply stores, and other retail outlets.

The recommended tire inflation pressure that motorhome manufacturers provide reflects the proper psi when a tire is cold. The term cold does not relate to the outside temperature. Rather, a cold tire is one that has not been driven on for at least three hours. When you drive, your tires get warmer, causing the air pressure within them to increase. Therefore, to get an accurate tire pressure reading, you must measure tire pressure when the tires are cold or compensate for the extra pressure in warm tires.

Steps for Maintaining Proper Tire Pressure:

- Locate the recommended tire pressure on the vehicle's tire information placard, certification label, or in the owner's manual.
- Record the tire pressure of all tires.

- If the tire pressure is too high in any of the tires, slowly release air by gently pressing on the tire valve stem with the edge of your tire gauge until you get to the correct pressure.
- If the tire pressure is too low, note the difference between the measured tire pressure and correct tire pressure. These “missing” pounds of pressure are what you will need to add.
- At a service station, add the missing pounds of air pressure to each tire that is under-inflated.
- Check all the tires to make sure they have the same air pressure (except in cases in which the front and rear tires are supposed to have different amounts of pressure).

If you have been driving your vehicle and think that a tire is under-inflated, fill it to the recommended cold-inflation pressure indicated on your vehicle’s tire information placard or certification label.

While your tire might still be slightly under-inflated due to the extra pounds of pressure in the warm tire, it is safer to drive with air pressure that is slightly lower than the vehicle manufacturer’s recommended cold-inflation pressure than to drive with a significantly under-inflated tire. Since this is a temporary fix, do not forget to recheck and adjust the tire’s pressure when you can obtain a cold reading.

Tire Size:

To maintain tire safety, purchase new tires that are of the same size as the motorhome’s original tires, or another size recommended by the manufacturer. Look at the tire information placard, the owner’s manual, or the sidewall of the tire you are replacing to find this information. If you have any doubt about the correct size to choose, consult with the tire dealer.

Tire Tread:

The tire tread provides the gripping action and traction that prevents your vehicle from slipping or sliding, especially when the road is wet or icy. In general, tires are not safe and must be replaced when the tread is worn down to 1/16 of an inch. Tires have built-in tread-wear indicators that let you know when it is time to replace your tires. These indicators are raised sections spaced intermittently in the bottom of the tread grooves. When they appear “even” with the outside of the tread, it is time to replace your tires.

Another method for checking tread depth is to place a penny in the tread with Lincoln’s head upside down and facing you. If you can see the top of Lincoln’s head, you are ready for new tires.

Tire Balance and Wheel Alignment:

To avoid vibration or shaking of the vehicle when a tire rotates, the tire must be properly balanced. This balance is achieved by positioning weights on the wheel to counterbalance

heavy spots on the wheel-and-tire assembly. A wheel alignment adjusts the angles of the wheels so that they are positioned correctly relative to the motorhome's frame. This adjustment maximizes the life of your tires. These adjustments require special equipment and must be performed by a qualified technician.

Tire Rotation:

Rotating tires from front to back and from side-to-side can reduce irregular wear (for motorhomes that have tires that are all the same size). Look in your owner's manual for information on how frequently the tires on your vehicle must be rotated and the best pattern for rotation.

Tire Repair:

The proper repair of a punctured tire requires a plug for the hole and a patch for the area inside the tire that surrounds the puncture hole. Punctures through the tread can be repaired if they are not too large, but punctures to the sidewall must not be repaired. Tires must be removed from the rim to be properly inspected before being plugged and patched.

A Tire Rotation Example:

For maximum mileage, rotate your tires every 5,000 miles. Follow correct rotation patterns; see Figure 16-2.

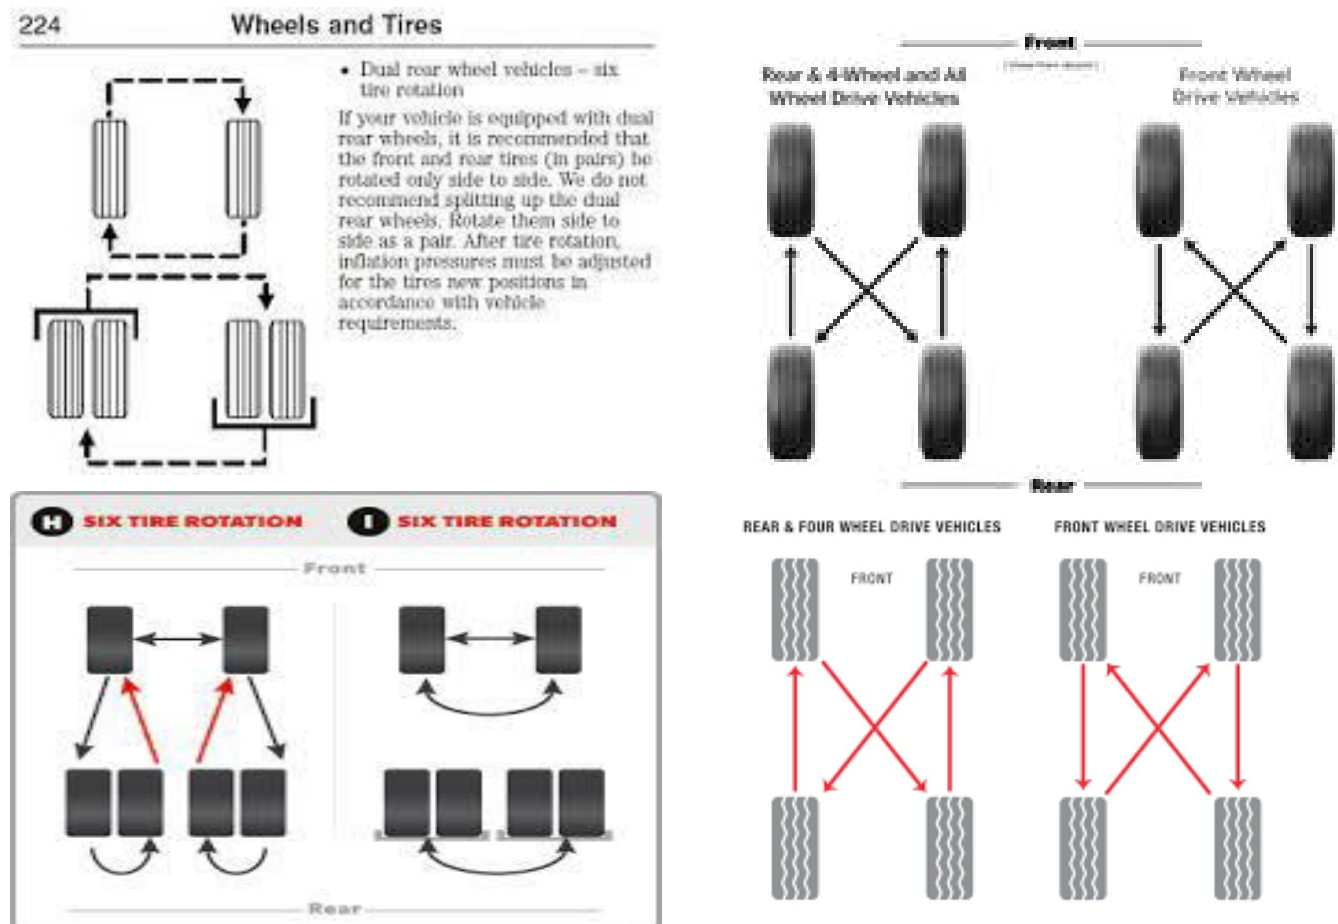


Figure 16-2: Tire Rotation


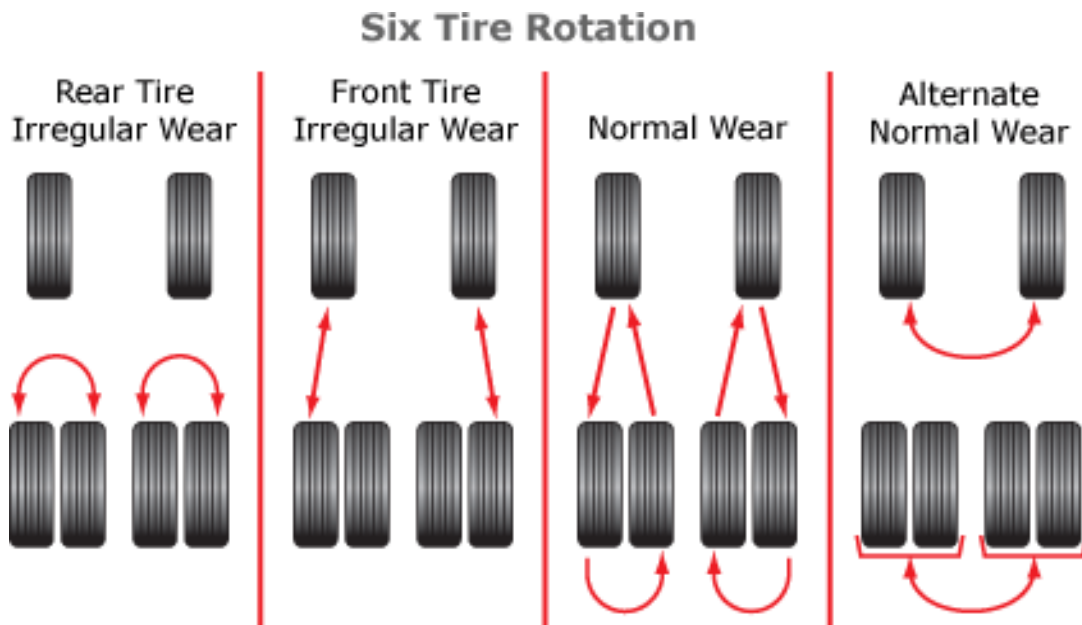


Figure 16-2: Tire Rotation

TIRE SIDEWALL MARKINGS

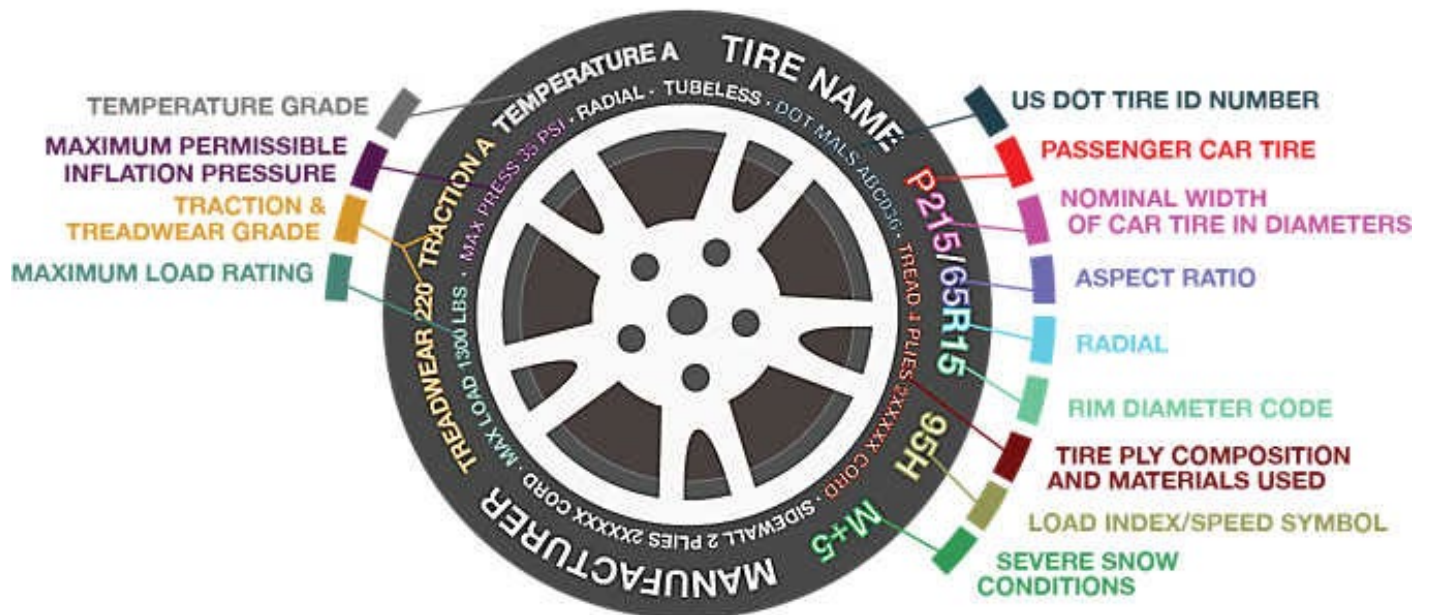

Information on Passenger Vehicle Tires (Figure 16-3):

NOTE: Passenger car tires are not recommended for use on trailers, because the capacity ratings are not marked on the side walls of these tires. If a passenger car tire is used, the capacity must be de-rated by 10%.

P—The “P” indicates the tire is for passenger vehicles

Next number—This three-digit number gives the width in millimeters of the tire from sidewall edge to sidewall edge. In general, the larger the number, the wider the tire.

Next number—This two-digit number, known as the aspect ratio, gives the tire’s ratio of height to width. Numbers of 70 or lower indicate a short sidewall for improved steering response and better overall handling on dry pavement.

R—The “R” stands for radial. Radial ply construction of tires has been the industry standard for more than 20 years.

Next number—This two-digit number is the wheel or rim diameter in inches. If you change your wheel size, you will have to purchase new tires to match the new wheel number.

Next number—This two or three-digit number is the tire’s load index. It is a measurement of how much weight each tire can support. You might find this information in your owner’s manual. If not, contact a local tire dealer.

NOTE: You might not find this information on all tires because it is not required by law.

M+S—The “M+S” or “M/S” indicates that the tire has some mud and snow capability. Most radial tires have these markings

Figure 16-3: Tire Sidewall Markings

Speed Rating—The speed rating denotes the speed at which a tire is designed to be driven for extended periods of time.

U.S. DOT Tire Identification Number—This begins with the letters “DOT” and indicates that the tire meets all federal standards. The next two numbers or letters are the plant code where it was manufactured, and the last four numbers represent the week and year the tire was built. For example, the numbers 1625 means the 16th week of 2025. The other numbers are marketing codes used at the manufacturer’s discretion. This information is used to contact customers if a tire defect requires a recall.

Tire Ply Composition and Materials Used—The number of plies indicates the number of layers of rubber-coated fabric in the tire. In general, the greater the number of plies, the more weight a tire can support. Tire manufacturers also must indicate the materials in the tire, which include steel, nylon, polyester, and others.

Maximum Load Rating—This number indicates the maximum load in kilograms and pounds that can be carried by the tire.

Maximum Permissible Inflation Pressure—This number is the greatest amount of air pressure that should ever be put in the tire under normal driving conditions.

Vehicle Load Limits:

Determining the load limits of a vehicle includes more than understanding the load limits of the tires alone. On a motorhome, a federal certification label is affixed in the rear closet. The certification label will indicate the vehicle’s gross vehicle weight rating (GVWR). This is the most weight the fully loaded vehicle can weigh.

It will also provide the gross axle weight rating (GAWR). This is the most an axle can weigh. If there are multiple axles, the GAWR of each axle will be provided. For motorhomes, in the same location as the certification label described above, there is a vehicle placard in the entry doorframe. This placard provides tire and loading information. In addition, this placard will show the vehicle's seating capacity for people and a statement regarding maximum cargo capacity.

Cargo Capacities:

For motorhomes, cargo can be added to the vehicle, up to the maximum weight specified on the placard. For motorized vehicles, the combined weight of passengers and cargo is provided as a single number. If fewer people are traveling, more cargo can be added. If more people are involved, the weight of cargo must be reduced. In any case, the total weight of a fully loaded vehicle, including passengers, cannot exceed the stated GVWR.

For motorhomes, water and propane also need to be considered. The weight of fully filled propane containers is considered part of the weight of the RV before it is loaded with people or cargo and is not considered part of the disposable cargo load. Water, however, is cargo weight and is treated as such. If there is a fresh water storage tank of 50 gallons, this tank when filled would weigh about 400 pounds. If more cargo or people are being transported, water can be off-loaded to keep the total amount of cargo added to the vehicle within the limits of the GVWR to not overload the vehicle.

Understanding this flexibility will allow you to make choices that fit your travel and camping needs. When loading your cargo, be sure it is distributed evenly to prevent overloading from front to back and side-to-side. Heavy items must be placed low and as close to the axle positions as reasonable. Too many items on one side might overload a tire.

The best way to know the actual weight of the vehicle is to weigh it at a certified public scale. Talk to your RV dealer to discuss the weighing methods needed to determine the various weights related to the RV. This will include weights for axles, wheels, hitch, and total weight.

How Overloading Affects the Motorhome and Tires:

The results of overloading can have serious consequences for passenger safety. Too much weight on your vehicle's suspension system can cause spring, shock absorber, or brake failure, handling or steering problems, irregular tire wear, tire failure, or other damage.

An overloaded vehicle is hard to drive and hard to stop. In cases of serious overloading, brakes can fail completely, particularly on steep hills. The load a tire will safely carry is a combination of the size of tire, its load range, and corresponding inflation pressure.

Excessive loads and/or under-inflation cause tire overloading and, as a result, abnormal tire flexing occurs. This situation can generate an excessive amount of heat within the tire. Excessive heat might lead to tire wear and eventually, tire failure.

It is the air pressure that enables a tire to support the load, so proper inflation is critical. Since RVs can be configured and loaded in many ways, air pressures must be determined from actual loads (determined by weighing) and taken from the load and inflation tables provided by the tire manufacturer. These air pressures might differ from those found on the certification label. However, they must never exceed the tire limitation for load or air pressure.

Tire Safety Tips:

Preventing Tire Damage:

- Slow down if you must go over a pothole or other object in the road.
- Do not run over curbs or other foreign objects in the roadway and try not to strike the curb when parking.

Tire Safety Checklist:

- ✓ Check tire pressure regularly (at least once a month), including the spare.
- ✓ Inspect tires for uneven wear patterns on the tread, cracks, foreign objects, or other signs of wear or trauma.
- ✓ Remove bits of glass and wedge foreign objects in the tread.
- ✓ Make sure your tire valves have valve caps.
- ✓ Check tire pressure before going on a long trip.
- ✓ Do not overload your vehicle. Check the Tire Information and Loading Placard or User's Manual for the maximum recommended load for the vehicle.

SECTION TWO:

Steps for Determining Correct Load Limit:

- Locate the statement "The combined weight of occupants and cargo should never exceed XXX lbs." on your vehicles placard.
- Determine the combined weight of the driver and passengers that will be riding in your vehicle.
- Subtract the combined weight of the driver and passengers from XXX kilograms or XXX pounds.
- The resulting figure equals the available amount of cargo and luggage capacity. For example, if "XXX" equals 1400 lbs. and there will be five 150 lb. passengers in your vehicle, the amount of available cargo and luggage capacity is 650 lbs. (1400-750 (5 x 150) = 650 lbs.)
- Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage capacity calculated in Step #4.

- If your vehicle is towing a trailer, load from your trailer will be transferred to your vehicle. Consult this section to determine how this reduces the available cargo and luggage capacity of your vehicle.

SECTION THREE:

Glossary of Tire Terminology:

Accessory weight—The combined weight (more than those standard items, which may be replaced) of automatic transmission, power steering, power brakes, power windows, power seats, radio and heater, to the extent that these items are available as factory-installed equipment (whether installed or not).

Bead—The part of the tire that is made of steel wires, wrapped or reinforced by ply cords and that is shaped to fit the rim.

Bead separation—This is the breakdown of the bond between components in the bead.

Bias ply tire—A pneumatic tire in which the ply cords that extend to the beads are laid at alternate angles substantially less than 90 degrees to the centerline of the tread.

Carcass—The tire structure, except tread and sidewall rubber which, when inflated, bears the load.

Chunking—The breaking away of pieces of the tread or sidewall.

Cold-inflation pressure—The pressure in the tire before you drive.

Cord—The strands forming the plies in the tire.

Cord separation—The parting of cords from adjacent rubber compounds.

Cracking—Any parting within the tread, sidewall, or inner liner of the tire extending to cord material.

CT—A pneumatic tire with an inverted flange tire and rim system in which the rim is designed with rim flanges pointed radially inward and the tire is designed to fit on the underside of the rim in a manner that encloses the rim flanges inside the air cavity of the tire.

Curb weight—The weight of a motor vehicle with standard equipment including the maximum capacity of fuel, oil, and coolant, and, if so equipped, air conditioning and additional weight optional engine.

Extra load tire—A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire.

Groove—The space between two adjacent tread ribs.

Gross Vehicle Weight Rating (GVWR)—The maximum permissible weight of this fully loaded motorhome.

Gross Axle Weight Rating (GAWR)—The value specified as the load carrying capacity of a single axle system, as measured at the tire-ground interfaces.

Hitch Weight—The vertical trailer load supported by the hitch ball.

Inner liner separation—The parting of the inner liner from cord material in the carcass.

Intended outboard sidewall—The sidewall that contains a white-wall, bears white lettering or bears manufacturer, brand, and/or model name molding that is higher or deeper than the same molding on the other sidewall of the tire or the outward facing sidewall of an asymmetrical tire that has a side that must always face outward when mounted on a vehicle.

Light truck (LT) tire—A tire designated by its manufacturer as primarily intended for use on light-weight trucks or multipurpose passenger vehicles.

Load rating—The maximum load that a tire is rated to carry for a given inflation pressure.

Maximum load rating—The load rating for a tire at the maximum permissible inflation pressure for that tire.

Maximum permissible inflation pressure—The maximum cold-inflation pressure to which a tire may be inflated.

Maximum loaded vehicle weight—The sum of curb weight, accessory weight, vehicle capacity weight, and production options weight.

Measuring rim—The rim on which a tire is fitted for physical dimension requirements.

Non-pneumatic rim—A mechanical device which, when a non-pneumatic tire assembly incorporates a wheel, supports the tire, and attaches, either integrally or separable, to the wheel center member and upon which the tire is attached.

Non-pneumatic tire assembly—A non-pneumatic tire, alone or in combination with a wheel or wheel center member, which can be mounted on a vehicle.

Normal occupant weight—This means 68 kilograms (150 lbs.) times the number of occupants specified in the second column of Table I of 49 CFR 571.110.

Occupant distribution—The distribution of occupants in a vehicle as specified in the third column of Table I of 49 CFR 571.110.

Open splice—Any parting at any junction of tread, sidewall, or inner liner that extends to cord material.

Outer diameter—The overall diameter of an inflated new tire.

Overall width—The linear distance between the exteriors of the sidewalls of an inflated tire, including elevations due to labeling, decorations, or protective bands or ribs.

Pin Weight—The vertical trailer load supported by the king pin of a fifth wheel hitch.

Ply—A layer of rubber-coated parallel cords.

Ply separation—A parting of rubber compound between adjacent plies.

Pneumatic tire—A mechanical device made of rubber, chemicals, fabric and steel, or other materials, that, when mounted on an automotive wheel, provides the traction and contains the gas or fluid that sustains the load.

Production options weight—The combined weight of those installed regular production options weighing over 2.3 kilograms (5 lbs.) more than those standard items which they replace, not previously considered in curb weight or accessory weight, including heavy duty brakes, ride levelers, roof rack, heavy duty battery, and special trim.

Radial ply tire—A pneumatic tire in which the ply cords that extend to the beads are laid at substantially 90 degrees to the centerline of the tread.

Recommended inflation pressure—This is the inflation pressure provided by the vehicle manufacturer on the Tire Information label and on the Certification/VIN tag.

Reinforced tire—A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire.

Rim—A metal support for a tire or a tire and tube assembly upon which the tire beads are seated.

Rim diameter—This means the nominal diameter of the bead seat.

Rim size designation—This means the rim diameter and width.

Rim type designation—This means the industry of manufacturer's designation for a rim by style or code.

Rim width—This means the nominal distance between rim flanges.

Section width—The linear distance between the exteriors of the sidewalls of an inflated tire, excluding elevations due to labeling, decoration, or protective bands.

Sidewall—That portion of a tire between the tread and bead.

Sidewall separation—The parting of the rubber compound from the cord material in the sidewall.

Test rim—The rim on which a tire is fitted for testing and may be any rim listed as appropriate for use with that tire.

Tread—That portion of a tire that comes into contact with the road.

Tread rib—A tread section running circumferentially around a tire.

Tread separation—Pulling away of the tread from the tire carcass.

Treadwear indicators (TWI)—The projections within the principal grooves designed to give a visual indication of the degrees of wear of the tread.

Vehicle capacity weight—The rated cargo and luggage load plus 68 kilograms (150 lbs.) times the vehicle's designated seating capacity.

Vehicle maximum load on the tire—The load on an individual tire that is determined by distributing to each axle its share of the maximum loaded vehicle weight and dividing by two.

Vehicle normal load on the tire—The load on an individual tire that is determined by distributing to each axle its share of the curb weight, accessory weight, and normal occupant weight (distributed in accordance with Table I of CFR 49 571.110) and dividing by 2.

Weather side—The surface area of the rim not covered by the inflated tire.

Wheel center member—In the case of a non-pneumatic tire assembly incorporating a wheel, a mechanical device which attached, either integrally or separable, to the non-pneumatic rim and provides the connection between the non-pneumatic rim and the vehicle; or, in the case of a non-pneumatic tire assembly not incorporating a wheel, a mechanical device which attaches, either integrally or separable, to the non-pneumatic tire and provides the connection between tire and the vehicle.

TIRE PRESSURE:

Correct tire inflation pressure is essential to maximizing the life of the tires and assuring the safety of the vehicle and its occupants. Driving with tires that are not correctly inflated for the load of the motorhome is dangerous and might cause premature wear, tire damage, and/or loss of control of the motorhome.

An underinflated tire will build up excessive heat that might approach the vulcanization temperature of the rubber and lead to tread separation and/or disintegration of the tire.

Underinflated tires will also cause poor handling of the motorhome, rapid and/or irregular tire wear, and an increase in rolling resistance of the motorhome, which, in turn, produces a decrease in fuel economy of operation.

An overinflated tire will reduce the tire's "footprint" (i.e., its actual contact with the road); thus, reducing the traction, braking capacity, and handling of the motorhome. A tire that is over-inflated for the load that it is carrying will also contribute to a harsh ride, uneven tire wear, and the tire itself will be more susceptible to impact damage.

Maintaining correct tire pressure for each loaded wheel position on the motorhome is critically important and must be a part of regular vehicle maintenance.

Tire Maximum Load Rating:

Federal law requires that the maximum load rating be molded into the sidewall of the tire. If you look at a tire sidewall, you might see some "typical" information, such as:

Max. Load Single 3640 Lbs. at 85-psi cold

Max. Load Dual 3415 Lbs. at 85-psi cold

The maximum load allowed for the size of the tire and load rating and the minimum cold air-inflation pressure needed to carry that stated maximum load are noted on the tire. Using less air pressure would reduce the load-carrying capacity of the tire.

NOTE: The amount of air pressure you need depends on the weight of the fully loaded motorhome. You cannot determine the correct air-inflation pressure, unless you know the actual weights of the motorhome.

Weighing the Motorhome:

Earlier, in Chapter 1, the procedures for weighing the motorhome were presented. These procedures provided the weighing of a “non-loaded” (i.e., not stocked with the possessions and provisions the user would normally have onboard for travel) motorhome. Obviously, any additional weight stored onboard (inside and underneath) the motorhome will contribute to the overall weight of the motorhome.

If not stored uniformly throughout the motorhome, additional weight of the possessions and provisions of the motorhome user will load each axle and each tire differently (front-to-rear and side-to-side distribution of that additional weight). Accordingly, **it is necessary to weigh the motorhome fully loaded, as the user would have it for travel.** Moreover, **it is necessary to weigh each tire position individually.**

Overloading the motorhome can produce problems with the tires, wheels, springs, brakes, drive train, and other motorhome assemblies. In addition, an overloaded motorhome uses more fuel, is more difficult to handle properly, and can lead to driver fatigue more quickly. In a worst-case condition, if any component should fail, this could result in loss of control of the motorhome and subsequent damage.

In certain states, the Highway Patrol routinely weighs motorhomes to check for overloaded axle weights. Therefore, there are many good reasons for assuring that the motorhome is properly loaded and not overloaded—this can be accomplished through a proper weighing of the fully loaded motorhome. You can find various places that have certified public scales where your motorhome can be weighed. For example, moving and storage company lots, farm suppliers with grain elevators, gravel pits, recycling companies, and large-scale commercial-truck stops are some of the possible locations for weighing the motorhome. A brief overview of motorhome weighing procedures is shown in Figure 16-4.









NOTE: Tire manufacturer’s load and inflation tables can be found on the sidewall of the tires mounted on the motorhome.

NOTE: If the motorhome has duals, read dual capacity from the tire and multiply by 2 (two) to obtain dual-assembly load-carrying capacity.

Information that is more detailed can be found in the manufacturer’s literature associated with the chassis and/or the tires provided with the motorhome. For example, the above graphic illustrates the inflation pressures for Michelin tires as a function of the loads per position for a specified speed of the motorhome. You can determine the appropriate inflation pressures for each of the tires on the motorhome, as a function of the loads they are to carry on a trip. Whenever there is a significant change in the loading regimen of the motorhome, it would be wise to re-calculate the load weights of the tires to ensure optimal use of the motorhome.

WEIGHING YOUR SINGLE AXLE RECREATIONAL VEHICLE

RV: To Obtain Individual Axle and Gross Vehicle Weights:

	STEP 1a	STEP 1b	STEP 1c	STEP 1d
				
				
Scale Weight	_____ lbs.	_____ lbs.	_____ lbs.	_____ lbs.
	(Step 1a = GAW)	(Step 1b = GVW)	(Step 1c = GAW)	(Step 1d)
From Owner's Manual	_____ lbs.	_____ lbs.	_____ lbs.	_____ lbs.
	GAWR	GVWR	GAWR	Vehicle Weight (GCWR-GVW)

To Obtain Individual Wheel Position Weights:




	STEP 2a	STEP 2b	STEP 2c
			
One Side Scale Weight	_____ lbs.	_____ lbs.	_____ lbs.
	(Step 2a)	(Step 2b)	(Step 2c)
Calculate Other Side Weight	_____ lbs.	_____ lbs.	_____ lbs.
	(Step 1a-2a)	(Step 1b-2b)	(Step 1c-2c)
Tire Load (lbs.)	_____ lbs.	_____ lbs.	_____ lbs.
	(See Note #1)		(See Notes #1 & 2)
Inflation	_____ psi		_____ psi
	(See Note #1)		(See Note #1)

Figure 16-4: Motorhome Weighing Procedures

Frequency of Checking Tire Inflation Pressures:

When you have determined the “correct” tire inflation pressures for each of the motorhome tires (Figure 16-5 and Figure 16-6) and inflated the tires under “cold” conditions, meaning the tires haven’t been driven for more than one mile, then the air pressures in the tires must be periodically checked to make sure that they retain their proper pressures. It is recommended that tire pressures be checked at least once a month, or preferably, every two weeks, and before any major trip.

On long trips, the tires must be checked every “drive” morning. On short trips (a day or less), the tires must be checked before one departs on the trip and again before one returns home.

Check tire pressures when they are “cold”; that is, the tires have not been driven at all or, at most, less than one mile before being measured. In this manner, the tire pressure has not been increased by the heating associated with tire sidewall and tread flexure associated with traveling. If you check tires that are warm or hot, remember that they will necessarily read



Figure 16-5: Rear Tire



Figure 16-6: Front Tire

higher than normal. Do not “bleed” these tires down to the “cold pressure” readings, as they will probably then be underinflated when they are cool.

Do not make any adjustments to tire pressures when the tires are warm or hot, if such can be avoided. To make these tire-pressure measurements, purchase a high-quality truck-tire air gauge, which has an angled dual head. This type of gauge enables you to check inflation pressures of both the inner dual wheel, which has the valve stem pointing toward one, and on the outer wheel, which has the valve stem pointing away from one.

Pressure-sealing valve caps must always be used to protect the valve stems and prevent air from escaping from the valve stems.

Tire Wear, Balance, and Wheel Alignment:

In addition to tire inflation considerations, the tires must also be periodically examined for other types of normal “wear and tear.” If installed and maintained properly, all tires mounted on the motorhome will be worn in a smooth, even pattern. If the tires begin to show irregular wear patterns and the motorhome alignment is still correct, then sometimes just rotating the tires by changing wheel position and rotation of the tires will allow the tires to wear evenly. Check with the chassis manufacturer and its literature in the Owner’s Information Package for on maintaining proper wheel alignment.

Tire Cleaning:

Proper cleaning of the tires will ensure maximum years of service. A soft brush and the normal mild soap must be used to clean the tires. Use care in applying any tire “dressing” product as these contain petroleum derivatives, alcohol, or silicones, which might cause deterioration of the rubber, possibly leading to cracking, and accelerate the aging process. In many instances, it is not the actual dressing itself, but the reaction of that product with the antioxidant in the tire. Heat can also compound this problem.

INTERIOR CARE:

NOTICE

The fading of upholstery, carpet, and other interior fabrics is generally caused by excessive sunlight. The night shades must be kept closed when the motorhome is parked for an extended period of time to minimize the fading. Normal deterioration of the appearance of such items caused by wear and/or exposure to strong lighting is not covered by the Tiffin Motorhomes Limited Warranty.

Carpet

A weekly routine of vacuuming the carpet and fabrics throughout the vehicle is recommended. The optional vacuum system has a central connection within the motorhome wherein a vacuum hose can be connected, and the necessary vacuuming performed, as desired.

Remember to empty or replace vacuum bags before they become overly full—this practice will ensure that enough vacuuming capability is readily available to handle all cleaning situations that might arise. In carpet areas that receive the most sunlight, keeping the curtains closed whenever possible will minimize fading. Also, act quickly when anything is spilled or dropped onto the carpet to prevent or minimize staining.

To connect the cleaning hose, raise the wall remote inlet valve door and align hose-end coupling with the slots on each side of the intake opening. Firmly push into the intake opening. Make sure the hose-end coupling is connected and is locked in place. To disconnect the hose, push in the slots on each side of the hose coupling and pull the hose end straight out.

NOTE: The vacuum cleaner hose must be plugged into the outlet to activate the vacuum motor.

To start the vacuum cleaner:



- Lift inlet valve cover on the wall.
- Insert the hose cuff with a twist and push. The vacuum cleaner will start automatically.
- To remove, turn the hose in either direction while pulling the hose toward you.

To change the dust bag, you will need to open the door on the vacuum cleaner by pushing the latch upward and removing the door completely. Remove the full bag and discard. Next, locate the pipe inside the vacuum chamber. Holding the new bag's cardboard collar at approximately a 45-degree angle, insert the cardboard part of the bag against the upper back of the vacuum cleaner chamber behind the pipe. Lift the front of the collar over the pipe as far as possible.

When closing the door, tuck in the left and right corners of the bag so that the door is properly sealed, and the latch clicks into place. The vacuum cleaning system comes with an array of

attachments that can be connected to the hose ends for extensive cleaning purposes. Make sure they are firmly pushed in and twist to hold in place.

For further instructions to change the dust bag, use the attachments, and proper cleaning technique, refer to the specific Owner’s Manual located in your motorhome.

 WARNING	 WARNING
This appliance has a THERMAL PROTECTOR built in the motor to prevent overheating. If the motor will not operate or shuts down while in operation, wait for 30 minutes; it will reset automatically. Turn the unit OFF while it resets. If the motor does not come on, or Thermal Protector trips off again after a short period, service might be needed. A qualified service technician must perform the service.	When cleaning the upholstery and fabric of the motorhome, do not use lacquer thinner, nail polish remover, laundry soaps, or bleach. Never use carbon tetrachloride or gasoline for cleaning purposes. These substances might cause damage to the materials being cleaned and most are highly flammable.

FABRICS:

The fabrics (Figure 16-7 and Figure 16-8), used in this motorhome for the bedspread, draperies, headboard, and valances contain fire-retardant additives that might be damaged by use of improper cleaning products. These items are **DRY CLEAN ONLY**. Water-based products are not recommended for cleaning the fabrics in your new vehicle. Most water-based, household-cleaning products are not formulated for use on these fabrics and might cause excessive shrinkage or fading. For the best results, the fabrics in this vehicle must be cleaned by a professional carpet and upholstery cleaner. Spills, spots, or stains must be treated as soon as possible to avoid permanent damage to the fabrics. If a spill occurs, blot the fluid with a dry towel, do not rub the spill as rubbing might cause the liquid to “set” in the fabric and cause a stain. When attempting to clean a spot or stain, always start from the outside and work inward to avoid spreading the stain further. Some stains or soils are extremely difficult or impossible to be removed completely. These stains must receive immediate professional attention. Spills, spots, stains, or soiled areas are the responsibility of the owner and are not covered by Tiffin Motorhomes Limited Warranty.



Figure 16-7: Bedroom Fabrics

WALLS & CEILING:

The wall and ceiling coverings must be cleaned periodically to maintain a new appearance. Use a non-abrasive cleaner with a soft cloth on the walls. Do not use solvents of any kind, as those solvents might damage the surfaces being cleaned.

DASHBOARD:



Figure 16-8: Furniture Fabrics



Figure 16-9: Driver's
Side Dashboard

To keep the motorhome dashboard (Figure 16-9) in like-new condition, regularly follow these guidelines:

DO:

- Dust and clean the dashboard with a soft, damp cloth or chamois, wiping the surface gently.
- Use a mild detergent and lukewarm water.
- After washing and rinsing the dashboard, dry it by blotting with a damp cloth or chamois.

DO NOT:

- Use of harsh chemicals that might damage the dashboard.
- Use cloths containing grit or abrasive particles or kitchen-scouring compounds to clean or dust the dashboard.
- Subject the dashboard to hard, direct blows.
- Use boiling water, strong solvents, or other such materials to clean the dashboard, as they will soften the plastic.

WOODWORK & FLOORS:

The wood cabinetry must be cared for with furniture polish to sustain the natural beauty and luster of the wood. This procedure will also keep the cabinetry (Figure 16-10) looking new, prevent the wood from drying, and reduce chances of accidental staining or aging.



Figure 16-10: Kitchen Cabinetry



Figure 16-11: Kitchen Countertops

during subsequent use of the motorhome. Although solid surfacing can be repaired, certain steps must be taken to protect it.

Be sure to use a cutting board, rather than cutting directly on the countertop (Figure 16-11) surfaces. Although minor scratches and cuts can be repaired, a little care will ensure that the countertop surfaces will keep looking new for years.

Avoid using harsh chemicals on the countertop. Wipe the countertop with a damp cloth to remove water spots. For most dirt and stains, wipe with a damp cloth and use soapy water or ammonia-based cleaners (e.g., Windex). If a stain does not respond to soap and water, for a matte finish, apply an abrasive cleanser and buff it with a Scotch-Brite pad, using a circular motion. Use the same technique in the case of a cigarette burn. If the finish is a gloss finish, contact the dealer for specific cleaning instructions.

Do not expose the surface to harsh chemicals, such as paint remover, turpentine, nail polish remover, or any stove and drain cleansers. If these chemicals come into contact with the countertop surfaces, immediately wash off these chemicals, using appropriate safety measures to avoid injury.

In the event of subsequent staining or spotting, sand the affected surface lightly with fine sandpaper (400 grit or finer), then buff in a circular motion with a Scotch-Brite pad.

Use area rugs and floor mats by the entrance door to trap dirt. Use soap and water to clean the flooring, begin by vacuuming the floor to remove loose dust and dirt. Then, damp mop the floor with a cleaning solution consisting of any standard cleaning solution. The mop must be damp but not dripping. For further tips, see the manufacturer's information sheet in the Owner's Information Package.

COUNTERTOPS:

To care properly for the countertops in your new vehicle, always use a heat pad or trivet to protect the surface from hot objects that might mar or damage the countertop surface. Hot pans and heat-producing appliances (such as electric skillets), when set directly on top of the countertop, can possibly mar the beauty and finish of the product.

Additionally, since heat-producing appliances can also damage countertop seams, it is essential to identify seam locations to avoid them

ACCESSORIES:

The metallic light fixtures, bath accessories, and faucets can be cleaned by wiping with a soft, damp cloth. Washing with warm water will remove dry water spots. Polishing those fixtures with a soft cloth will also enhance their appearance. Do not use cleaners that contain harsh or abrasive chemicals. Alcohol or other similar solvents must never be used.

DETECTORS:

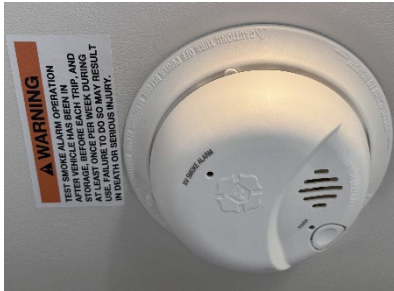


Figure 16-12: Smoke Detector

The CO/LP gas detectors (Figure 16-12) are self-contained and DO NOT require any maintenance other than normal cleaning and periodic testing. The smoke detector installed in the motorhome is a 9-volt, battery-operated detector. The CO/LP gas detector is wired directly to the house batteries.

The batteries in the smoke detector need to be tested periodically and replaced when necessary. When cleaning the case on any of the detectors, use a damp cloth or paper towel. Do not spray cleaners or wax directly into the case as this action might cause false alarms or hinder the normal

operation of the detectors.

Tiffin Motorhomes recommends purchasing an inexpensive battery tester. This tester will allow checking of the batteries in the various alarms, any flashlights used in the motorhome, and batteries in other appliances, which might be in the motorhome during travels.

CONDENSATION:

NOTICE

Since surface condensation within the motorhome cannot be controlled by the manufacturer, damage caused by condensation is not covered by the Tiffin Motorhomes Limited Warranty.

Damage might occur to your vehicle if excessive condensation exists. Accumulation of condensation on surfaces within your motorhome occurs when warm, moist air contacts a cool surface. It is most evident on the inside of windows, but this problem can be controlled by:

- Slightly opening a window or roof vent to allow moisture to escape from the motorhome.
- Using a small dehumidifier to remove moisture from the air.

Condensation levels are highest during times when a person is cooking or taking a shower in the motorhome, but these occasions are not the only times that condensation is present. Walls and ceiling panels might become wet when the moisture accumulates on these surfaces. Tiffin Motorhomes does not recommend the use of any catalytic heaters because of resulting extensive condensation.

NOTICE

Always follow the chassis maintenance guidelines outlined in the chassis manufacturer's owner's manual.

NOTICE

Cosmetic adjustments and alignments must be performed within the first three months from the date of the original purchase for warranty consideration. Thereafter, these items are considered routine maintenance.

ROUTINE MAINTENANCE SCHEDULES:

All routine maintenance is the responsibility of the owner and is not covered by the Tiffin Motorhomes Limited Warranty. Use the maintenance record in Chapter 17 to record all performed maintenance as required.

Any damage caused by improper or unperformed maintenance is not covered by the Tiffin Motorhomes Limited Warranty. Items supplied by other manufacturers might require specific individual maintenance not listed herein. Refer to the manufacturers' suggested maintenance guidelines in the Owners Information Package.

Monthly:

- Check the water levels of the batteries.

Every Three Months:

- Check LP gas lines for leaks with soap solution or leak detector.
- Clean the microwave hood exhaust fan filter and blades.
- Test smoke alarm and carbon monoxide/LP gas detector.
- Check the operation of windows, latches, and hinges.
- Clean the roof-ducted air conditioner filters.
- Clean and inspect the door and window seals; reseal where necessary.
- Inspect and reseal around the tub and shower area where necessary.
- Lubricate the exterior door hinges and latches with a graphite (silicone) lubricant.
- Check, clean, and tighten battery cables and inspect batteries for proper fluid levels.

Every Six Months:

- Inspect the slide-out for proper seal. If realignment is necessary, contact an authorized Tiffin Motorhomes Service Center.
- Inspect the exterior rubber slide-out seals and apply a UV inhibitor, such as 303 Protectant.
- Change the battery in the smoke detector.
- Rotate tires as recommended by the tire manufacturer.
- Check all gas appliances for proper operation.
- Have the LP system inspected by a qualified technician.
- Lubricate the movable parts on the entrance step.
- Change the batteries in both the smoke detectors.
- For the optional washer/dryer, inspect the water hoses (both the hot and cold supply lines) to note any bulges, kinks, cuts, wear, or leaks. Especially note the hot-water hose, as this tends to degrade faster than the cold-water hose. Replace if hose feels “soft” or “spongy.”

Annually:

- Inspection of roof seams and joints must be performed by an authorized Motorhomes Service Center. If resealing is necessary, it is the owner’s responsibility and is not covered by the Tiffin Motorhomes Limited Warranty.
- Sanitize the fresh water system.
- Wax and buff all gel-coat surfaces on the vehicle as described previously in this chapter.

WINTERIZING:

To store your vehicle for the winter months, it is necessary to winterize the water system to help prevent freezing of this system. If your unit has a Truma Water Heater, be sure to follow the instructions in the Operations Manual. The control panel is located under the kitchen sink; see Figure 16-13.

IMPORTANT: Turn off the water heater before draining to prevent burning the element out.

- Drain all the water from the water system including the holding tanks, the hot water heater, and freshwater tank. Also, drain the water filter. For the holding tanks, open the gate valves to drain the tanks.



Figure 16-13:
Truma Switch

NOTE: This procedure is to be performed only at a wastewater pumping station to prevent dumping of contaminated water elsewhere.

For the hot water heater, remove the outside cover and then remove the drain plug. When this tank is drained, replace the drain plug and then replace the cover. For the water tank, open the red-handled valve to drain the tank; then close the valve. Remove the filter cartridge from the water filter and store it in a clean environment. Empty any excess water from the filter housing and replace the housing.

- Turn the by-pass valve located in the exterior sanitation compartment to the “by-pass” position to prevent filling the water heater tank with antifreeze.
- Disconnect the inlet connection to the water pump located in the sanitary service compartment under the motorhome. Attach the supplied vinyl hose (through the plastic coupling on the hose) to the inlet connection and hand-tighten that connection. Do not over-tighten.
- Place the other end of the hose into a gallon of freshwater system antifreeze (one can refer to the local Tiffin Motorhomes dealer or representative for the freshwater antifreeze formulation for your specific area).

NOTE: Do not use automotive antifreeze; use only antifreeze approved for RV applications. Otherwise, damage to the systems being protected might result.

- Turn ON the water pump to start the flow of antifreeze. Turn ON each faucet, one at a time and allow pure antifreeze to run through that piping. Let about one cup drop into the drains to protect the traps.
- When all the antifreeze is withdrawn from the bottle, disconnect the clear vinyl hose from the water-pump inlet connection and reconnect the inlet line to the water pump. (This might require more than one gallon of antifreeze).
- When the winterizing process is completed, turn the water pump OFF and then reconnect the water line. Store the vinyl hose for future use.
- Open the water supply valve that controls flow from the pump to the tank to help prevent freezing on that water line.

NOTE: The motorhome also has an exterior shower that must be winterized, as well.

If the motorhome is equipped with an optional ice maker, the following additional steps must be taken.

Dometic Refrigerator Ice Maker (optional):

- Shut off the water supply to the icemaker.
- Place a shallow pan under the water solenoid valve.

- Remove the inlet fitting to the icemaker water solenoid valve. Then, drain the water from the supply line.
- Remove the plastic nut and water line from the outlet side of the water solenoid valve. Then, drain the water from that line.

NOTE: Do not lose the metal insert from the plastic water line. One recommended way to secure this insert is to place it into a “zip lock” bag, seal the bag, punch a small hole through the top of the bag above the zip-lock, insert any type of “twist-tie” through the hole, and then secure that bag to the outlet line for safekeeping.

- Connect a source of compressed air (up to 20 psi) onto the inlet fitting of the water solenoid valve. Apply AC power to the solenoid valve for forcing the icemaker mold assembly through several harvest cycles.
- Remove the plastic cover from the mold assembly. The bail arm must be in the DOWN (or ON) position.
- Start the harvest cycle with a flat-blade screwdriver inserted into the center of the small gear.
- Turn the gear counter clockwise (CCW). When the hold switch closes, the mold assembly will continue to operate through the harvest cycle. During the water-fill sequence of the harvest cycle, the compressed air will blow out the water trapped in the solenoid valve.
- Repeat the harvest cycle operation (i.e., steps 7 and 8) several times.

NOTE: Damage to the solenoid valve can occur if the AC power is applied for more than 20 seconds.

- Reconnect and tighten the lines on the water solenoid valve. The metal insert must be installed in the plastic water line going to the outlet side of the water solenoid. Leave the water supply turned OFF until temperatures are above 0° F (-18° C).
- Dry out the icemaker mold assembly with a soft cloth. Place the bail arm in the UP (OFF) position.

Residential Refrigerator Ice Maker (optional):

- Unplug refrigerator or disconnect power.
- Locate the water supply shut off valve and turn OFF the water supply.
- Disconnect the water supply line to the refrigerator and drain the supply line completely.
- Locate the icemaker fill tube at the rear of the refrigerator and follow the water line down to the water valve.

- Remove any covers if necessary.
- Disconnect the water line from the water valve and drain the water from the line and the valve. Use a small pan to catch water.
- Remove the water filter cartridge (if applicable.)

NOTE: Reinstall a new water filter cartridge when the refrigerator is put back into service.

DE-WINTERIZING:

Follow the instructions in your water system's operations manual.

- Open both low point drains to allow the antifreeze solution to drain from the water system.
- Close the low point drains and connect your vehicle to the city water system. Put water in the freshwater tank and pump at least one gallon through the water pump to remove the antifreeze from the water pump. Keep the water heater in bypass mode.
- Open the kitchen faucet, bath faucet, and inside and outside showers, turning ON both the hot and cold-water valves, and flushing the stool until the antifreeze solution is flushed out of the system and the water flow is clear.
- Open the water heater bypass valve. Open the freshwater tank supply valve from the pump and the icemaker valve.
- Reinstall the (optional) water filter. Fill the water heater and hot water lines before turning the water heater on.
- Be sure to close the fresh water tank drain valves to allow the tank to fill.

MAINTENANCE & DATA CHARTS

Chapter

17

RV OWNER DATA SHEET:

Enter the following information in the table for your future use:

Allegro: Year:_____Model #_____Tiffin Serial # _____			
Appliance	Brand	Model No.	Serial No.
Refrigerator			
Water heater			
Microwave			
Inverter/Converter			
Television, Front			
Back-up monitor			
Stereo/CD			
DVD home theater			
Air conditioner			
Generator			

Reproduction Master – Copy this sheet and use copy to maintain your maintenance records. You might wish to keep the completed sheets in a three-ring binder for your permanent record.

RV OWNER MAINTENANCE RECORD

Enter the following information in the table for your future use:

Allegro: Year: _____ Model # _____ Tiffin Serial # _____			
Date/Mileage	Work Performed	Performed by	Cost (\$)

Reproduction Master – Copy this sheet and use copy to maintain your maintenance records. You might wish to keep the completed sheets in a three-ring binder for your permanent record.

RV OWNER MAINTENANCE RECORD

Enter the following information in the table for your future use:

Allegro: Year:_____Model # _____Tiffin Serial # _____			
Date/Mileage	Work Performed	Performed by	Cost (\$)

Reproduction Master – Copy this sheet and use copy to maintain your maintenance records. You might wish to keep the completed sheets in a three-ring binder for your permanent record.

RV OWNER MAINTENANCE RECORD:

Enter the following information in the table for your future use:

Allegro: Year:_____Model # _____Tiffin Serial # _____			
Date/Mileage	Work Performed	Performed by	Cost (\$)

Reproduction Master – Copy this sheet and use copy to maintain your maintenance records. You might wish to keep the completed sheets in a three-ring binder for your permanent record.




Tiffin Motorhomes, Inc. | 105 2nd St. NW | Red Bay, AL 35582
tiffinmotorhomes.com

Phone: 256-356-8661 | Email: info@tiffinmotorhomes.com

To view or download a full color, printable version of this owner's manual, visit
www.tiffinmotorhomes.com/resources/owners-manual

OR SCAN BELOW



Because of progressive improvements and specifications, standard and optional equipment are subject to change without notice or obligation. For a complete and up-to-date list of available options and specifications, visit tiffinmotorhomes.com.

2024 Tiffin Motorhomes, Inc. Allegro®, Allegro Breeze®, Allegro RED®, Phaeton®, Allegro Bus®, Zephyr®, Wayfarer®, Roughing It Smoothly®, Open Road®, PowerGlide®, and Cahaba® are registered trademarks of Tiffin Motorhomes, Inc. P/N: 5163985, All rights reserved.