

TIFFIN MOTORHOMES, INC.

105 2nd Street NW ♦ Red Bay, Alabama 35582 U.S.A.

Phaeton Owner's Manual

TIFFIN MOTORHOMES, INC.

Phaeton Owner's Manual

© Tiffin Motorhomes, Inc.
105 2nd Street NW, Red Bay, AL 35582 U.S.A.
Telephone 256.356.8661 • Facsimile 256.356.8219
E-Mail: info@tiffinmotorhomes.com

DISCLAIMER

Many of the features and appliances described in this manual may or may not be reflected in the actual motor home purchased, depending on the options and models selected by the motor-home owner. All items, materials, instructions, and guidance described in this manual are as accurate as possible at the time of printing. However, because of Tiffin Motorhomes' ongoing and dedicated commitment to excellence, improvement of Tiffin's motor homes is a continuing process. Consequently, Tiffin Motorhomes reserves the right to make substitutions and improvements in its makes and models of motor homes without prior notification. Substitutions of comparable or better materials, finishes, appliances, instrumentation, and instruction may be made at any time it is deemed prudent to provide the customer with the best possible motor home meeting the customer's requirements.

Copyright © 2002 by Tiffin Motorhomes, Inc. – all rights reserved

Printed in the United States of America: Second U.S. Printing: November, 2002

Table of Contents

<hr/> Chapter 1 <hr/>		Fire Safety	2-8
General Information		Fire Extinguisher	2-9
Delivery	1-2	Smoke Detector	2-9
Dealer Responsibilities	1-2	Emergency Exit Window	2-10
Customer Responsibilities	1-2	Parking Procedures	2-10
Tiffin Motorhomes Limited Warranty	1-3	Towing Hitch	2-11
Major Equipment Manufacturers	1-4	<hr/> Chapter 3 <hr/>	
Warranty Service	1-5	Heating & Air Conditioning	
Owner's Information Package	1-5	Furnace	3-2
Customer Relations	1-6	Air-Conditioning System	3-3
Specification Labels	1-6	Thermostatic Controls	3-4
Weighing Procedures for the Phaeton	1-7	Liquid Propane (LP) Tank	3-5
Weight Distribution of the Motor Home	1-8	LP Tank Filling Practices	3-6
<hr/> Chapter 2: <hr/>		LP Gas Regulator	3-6
Driving & Safety Instructions		LP Gas Detector	3-7
Safety Considerations	2-2	<hr/> Chapter 4 <hr/>	
General Warning	2-2	Major Appliances & Accessories	
Prior to Departure	2-3	Refrigerator	4-2
Driving	2-4	Microwave / (Opt.) Convection Range	4-3
Fuels for the Motor Home	2-5	Air Filtration Fan	4-3
Liquid Propane (LP) Gas System	2-6	Cook-Top and Oven	4-4
LP Gas Regulator	2-7		
LP Distribution System	2-8		
Recommended Precautionary Practices	2-8		

TELEVISION SYSTEM OPERATION	4-5
Television Antenna	4-5
Television Satellite Dish Control (Opt.)	4-6
Television Sets	4-6
VHS Video Cassette Recorder (Opt.)	4-7
Audio-Video Control Console	4-7
AM/FM/CD Stereo System	4-7
Home Theater System (Optional)	4-7
Cable & Telephone Jack	4-8
Water Heater	4-9
Water Heater Storage	4-10
Pressure-Relief Valve	4-11
CB Radio System Antenna Connection	4-11
Rear-View Camera Monitor System	4-12
Washer / Dryer (Optional)	4-12
Carbon Monoxide Detector	4-12

Chapter 5

Cabinets & Furniture

Cabinets	5-2
Furniture	5-3
Bedroom Area	5-4

Chapter 6

Structural Features

Chassis Features	6-2
Alignment	6-2

Chapter 7

Electrical Features

General Information	7-2
Circuit-Breaker Boxes	7-2
Auxiliary Start Switch	7-3
Battery Inspection and Care	7-3
Battery Disconnect Panel	7-5
120-Volt AC (VAC) Receptacles	7-6
12-Volt DC (VDC) Receptacles	7-6
Ground-Fault-Circuit Interrupt (GFCI)	7-6
ICC Switch	7-7
Converter	7-7
Inverter / Converter (Optional)	7-7
Electrical Generator	7-9
Automatic Transfer Switch	7-9
Reset-able Circuit Breakers	7-10
Fuse Blocks	7-10

Chapter 8

Slide-Out Features

SLIDE-OUT OVERVIEW	8-2
General Considerations	8-2
Operating Precautions	8-2
Extending the Slide-Out Room	8-3
Retracting the Slide-Out Room	8-3
Manual Operation: Slide-Out Room	8-4

Chapter 9

Exterior Features

Towing Hitch	9-2
Exterior Sides	9-2
Security Lights	9-2
Roof & Ladder	9-2
Hydraulic-Leveling Jacks	9-3
Leveling Control System	9-3
Electric Steps	9-4
Mirrors	9-6

Chapter 10

Interior Features

Bedspread	10-2
Flooring	10-2
Ceiling	10-2
Window Treatments	10-3

Chapter 11

Plumbing & Bath Features

FRESH WATER SYSTEM	11-2
Monitor Panel	11-2
Kitchen Sink	11-2
Bath, Sink, Shower & Accessories	11-2
Water Pump	11-3
City Water Connection	11-4
Filling the Fresh-Water Tank	11-4
Sanitizing	11-5

Water Filter	11-6
Water Heater Bypass System	11-7
Fresh Water Lines	11-7
WASTE WATER SYSTEMS	11-8
General Information	11-8
Toilet	11-8
P-Traps	11-9
Black-Water Holding Tank	11-9
Gray-Water Holding Tank	11-9
Waste-Water Disposal	11-9
Camping with Sewer Connection	11-10
No-Fuss Flush	11-11
Exterior Shower	11-11

Chapter 12

Construction Features

Construction Notes	12-2
Typical Floor Plan	12-2

Chapter 13

Windows, Awnings, Vents & Doors

Windows	13-2
Awnings (Optional)	13-2
Vents	13-4
Doors	13-4

Chapter 14

Routine Maintenance

EXTERIOR CARE	14-2
Washing	14-2
Waxing	14-3
Seals	14-3
Proper Sealants for Application	14-3
Striping and Decals	14-4
Wheel Care	14-5
Roof Care and Maintenance	14-5
Tire Pressure	14-6
INTERIOR CARE	14-10
Carpet	14-10
Fabrics	14-11
Walls and Ceiling	14-11
Dashboard	14-12
Woodwork and Floors	14-12
Countertops	14-13
Accessories	14-14
Detectors	14-14
Condensation	14-14
ROUTINE MAINTENANCE SCHEDULES	14-15
Monthly	14-16
Every Three Months	14-16
Every Six Months	14-16
Annually	14-16
Winterizing	14-16

Chapter 15

Maintenance & Data Charts

Motor Home Owner's Data Sheet	15-2
Motor Home Maintenance Record	15-3

GENERAL INFORMATION

Delivery

Throughout the entire manufacturing process your Tiffin motor home has been regularly inspected by our qualified personnel to assure you of the finest product of the highest quality, without exception. However, the final inspection at our factory is not to be the last one. The pre-delivery inspection and system check that your dealer performs are the final inspections done to your particular motor home prior to your actually receiving your new Phaeton motor home. Your dealer is also available to assist you in understanding the warranties and completing the necessary forms to activate the warranties for the various appliances and accessories installed in your motor home.

Dealer Responsibilities

1. A **pre-delivery inspection and systems check** is performed to assure a thorough inspection of the motor home and to assure the proper operation of all factory-installed components.
2. A **customer walk-through** is performed to familiarize the new customer with the motor home, its systems and components, and their proper and safe operation.
3. Delivery of the **Owner's Information Package** which contains warranty cards and registrations for the vehicle and all factory-installed components from other vendors and suppliers to Tiffin Motorhomes. The detailed operation instructions and maintenance instructions on these components are also included in this package.
4. Assisting the customer in **completing the registration forms** to avoid loss of warranty coverage. The dealer should review the limited-warranty provisions with the customer to stress the importance of completing the warranty cards and registration forms for the components in the motor home to enable the manufacturers to receive them within the prescribed time limits.
5. Providing the customer with **information regarding warranty and non-warranty work** on the vehicle and its separately warranted components.

Customer Responsibilities

The customer is responsible for regular and proper maintenance of the motor home. Properly maintaining your motor home will prevent conditions arising from neglect that are not covered by your Tiffin Motorhomes limited warranty. The maintenance guidelines in this manual and any other, applicable manual(s) should be followed. It is your responsibility and obligation to return the vehicle to an authorized dealer for repairs and service.

To assist you in avoiding problems with your motor home, it is recommended that you do the following:

1. **Read the warranty.** Go over it thoroughly with your dealer to make sure you understand all the terms and conditions of the warranty.
2. **Inspect the motor home;** do not accept delivery until after you have gone through the motor home with the authorized Tiffin Motorhomes dealer. Ask questions about anything unfamiliar to you. Tiffin Motorhomes has provided a detailed checklist to be used during retail delivery. Be sure to review and check each item on that list and make sure that the Tiffin Motorhomes dealership does the same. Do not sign the checklist until you have done this completely. **NOTE:** Some variations may exist between the sales literature and the actual specifics of your particular Phaeton in the areas of measurements, weights, or quantities. Ask the dealer to define all the differences, as required.
3. **Please ask questions** about anything you don't fully understand about your Phaeton; Tiffin Motorhomes is here to serve you and assure that you have all the information necessary for your safe and enjoyable use of your new motor home.
4. When you are taking delivery, **set an appointment for adjustments.** This appointment should be within two weeks after you accept delivery.
5. You are responsible for and expected to **use your Phaeton in a responsible, safe manner.** Please take the time to familiarize yourself with the proper operation of the motor home and all its features before you attempt to use your motor home.

Tiffin Motorhomes, Inc.
 105 2nd Street NW
 Red Bay, AL 35882 U.S.A.
 Phone: (256) 356-8661

DEALER ACCEPTANCE REPORT _____ DATE _____

DEALER NAME _____

YEAR _____ MAKE _____ MODEL _____ COLOR _____

SERIAL NO _____ CHASSIS NO _____ MILEAGE _____

() I have checked the items indicated on the Manufacturer's Invoice and all are present in the (recreational) vehicle

OPERATING INSTRUCTIONS/WARRANTY BODILETS:

VEHICLE OWNER'S MANUAL _____ BATTERY WARRANTY _____
 MANUFACTURER'S WARRANTY REGISTRATION _____ FURNACE _____
 AUTOMOTIVE WARRANTY _____ WATER HEATER _____
 DATA PLATE _____ RANGE _____
 TIRE WARRANTY _____ REFRIGERATOR _____
 OTHER MAJOR APPLIANCES AND/OR COMPONENTS OF THE VEHICLE DESCRIBE _____

THE FOLLOWING ITEMS ARE LISTED FOR ACCEPTANCE INSPECTION:

<input type="checkbox"/> Air Keys (Duplicates) (Doors+ets)	<input type="checkbox"/> Interior Head Adjuster	<input type="checkbox"/> Vent Hood & Fan
<input type="checkbox"/> DCH & JD Tags	<input type="checkbox"/> Cruise Lighter	<input type="checkbox"/> Table Support Legs
<input type="checkbox"/> Exterior Lights & Lense	<input type="checkbox"/> Interior Lights & Fixtures	<input type="checkbox"/> Sink Covers
<input type="checkbox"/> Exterior Body Trim & Decals	<input type="checkbox"/> Window Screens & Lenses	<input type="checkbox"/> Sink Strainers & Strainers
<input type="checkbox"/> Exterior Mirrors	<input type="checkbox"/> Rear View Mirrors & Fins	<input type="checkbox"/> Toilet Lid Seal & Pad
<input type="checkbox"/> Exterior Components	<input type="checkbox"/> Carpets	<input type="checkbox"/> Shower Head Assembly/Curtain
<input type="checkbox"/> Power Cords	<input type="checkbox"/> Walls, Movers, Ceiling & Trim	<input type="checkbox"/> Medicine Cabinet
<input type="checkbox"/> Dump Valve & Caps	<input type="checkbox"/> Curtains, Tow Bales & Hardware	<input type="checkbox"/> Towel Racks
<input type="checkbox"/> Water Tank Fill	<input type="checkbox"/> Seats/Chairs, Upholstery & Hardware	<input type="checkbox"/> Instrument Panel & Gauges
<input type="checkbox"/> City Water Connector	<input type="checkbox"/> Water Pump	<input type="checkbox"/> Horn
<input type="checkbox"/> Drain Cables	<input type="checkbox"/> Pressure Tanks & Regulator	<input type="checkbox"/> Emergency Brake
<input type="checkbox"/> Water Heater	<input type="checkbox"/> Water Heater/Charger	<input type="checkbox"/> Deep Shet Pedestal
<input type="checkbox"/> Hub Caps	<input type="checkbox"/> Furnace	<input type="checkbox"/> Engine Bath House & Cap Sacs
<input type="checkbox"/> Tires, Rims & Lube	<input type="checkbox"/> Bunk & Pad	<input type="checkbox"/> Engine Oil Level
<input type="checkbox"/> Wheel Covers	<input type="checkbox"/> Gauges, Legs & Pads	<input type="checkbox"/> Engine Water Level
<input type="checkbox"/> Bumpers	<input type="checkbox"/> Cabinet Hardware & Drawers	<input type="checkbox"/> Transmission Fluid Level
<input type="checkbox"/> Wheelchairs, Motors & Holders	<input type="checkbox"/> Cabinet Panel	<input type="checkbox"/> Jack & Lug Wrench
<input type="checkbox"/> Entry Door, Screen Handle & Step	<input type="checkbox"/> Ruler & Parts	<input type="checkbox"/> TV
<input type="checkbox"/> Spare Tire Cover & Carrier	<input type="checkbox"/> Stove, Oven & Parts	<input type="checkbox"/> VCR

() ALL PAPERS IN REFRIGERATOR

The Following Items Are Damaged And Replacement Parts Are Required _____

Missing Items _____

The Following Repairs Are Required And Will Be Completed By The Dealer _____

I acknowledge that I have inspected the above unit and have found it to be in satisfactory condition with the exceptions noted above

DEALER INSPECTOR SIGNATURE _____ NAME OF TRANSPORTER _____

RECEIPT OF COPY IS HEREBY ACKNOWLEDGED _____ ADDRESS _____

DRIVER SIGNATURE _____ CITY _____ STATE _____ ZIP _____

Tiffin Motorhomes Limited Warranty

The Tiffin Motorhomes limited warranty was provided to you by your authorized Tiffin Motorhomes dealer during the pre-delivery inspection. When you inquire about your Tiffin Motorhomes warranty, please refer to this document. Should you need or desire an additional copy or other information, please contact:

Tiffin Motorhomes, Incorporated

105 2nd Street NW

Red Bay, AL 35582 U.S.A.

Telephone: (256) 356-8661; Facsimile: (256) 356-8219

E-Mail: info@tiffinmotorhomes.com

Tiffin Motorhomes will be pleased to send you an additional copy or any other information requested, as may be warranted.

Major Equipment Manufacturers

The following list is a compilation of the vendors and suppliers of the major subsystems and components of your Phaeton. This list is provided for your convenience and is not meant as a complete substitution of the literature and accompanying "how to contact us" information supplied by those vendors and suppliers in your Owner's Information Package [see below for particulars]. Where appropriate, web-site information is provided for computer users.

- Acme Air Conditioning (800) 552-2263 www.threev.com
- Atwood Mobile Products (800) 646-8557 www.atwoodmobile.com
 - CO Alarm (800) 880-6788 www.atwoodmobile.com
 - LP Gas Detector (815) 877-5700 www.atwoodmobile.com
 - LP Gas Water Heater (815) 877-5700 www.atwoodmobile.com
- Denso Corporation (248) 350-7500 www.globaldenso.com
- Flexsteel Industries (319) 556-7730 www.flexsteel.com
- Heart Interface (800) 446-6180 www.heartinterface.com
- HWH Corporation (800) 321-3494 www.hwhcorp.com
- Kwikkee (541) 942-3888 www.kwikkee.com
- Norcold, Inc. (800) 543-1219 www.norcold.com
- Onan Corporation (612) 574-5944 www.onanindiana.com
- Panasonic Corporation (800) 211-7262 www.panasonic.com

- Power Gear (800) 334-4712 www.powergear.com
- RV Products (Coleman A/C) (316) 832-3400 www.airxcel.com
- Sharp Corporation (800) 237-4277 www.sharp-usa.com
- Suburban Manufacturing Co. (423) 775-2131 www.suburbanmanufacturing.com
- The Dometic Corporation (219) 294-2017 www.dometic.com

For those wishing more information (e.g., locations of authorized subsidiaries), the following web site, www.rvamerica.com/data/s_alist.htm, should be helpful. This site provides complete, alphabetic listings of all suppliers and vendors for all contemporary recreational vehicles and motor homes.

Warranty Service

If any warranty service may be required, that service needs to be completed during the warranty period (general warranty: 12 months or 12,000 miles). Tiffin Motorhomes warrants its unitized construction for 10 years and its laminations for 5 years. The basic warranty for the motor home is one year or 12,000 miles.

Any service work performed after the expiration of the Tiffin Motorhomes warranties WILL NOT be covered by those warranties. Exceptions may be made, on an individual basis, to this deadline on account of the unavailability of parts and/or service-appointment time where work is to be performed. However, don't rely on the possibility of an exception; please schedule any, desired in-warranty work before your warranty expires.

Owner's Information Package

The Owner's Information Package includes valuable documents about your Phaeton and its components and systems. The Tiffin Motorhomes Phaeton Owner's Guide does not cover every possible detail of equipment—standard and/or optional—installed on or in your vehicle. By consulting the booklets and instruction manuals included in the Owner's Information Package, you will learn how to operate, maintain, and troubleshoot these items safely and effectively.



As with all valuable documentation, please keep them in a safe, secure place for your later use and consultation. When you complete and mail to the respective manufacturer(s) any warranty/guaranty registration card(s), make a photocopy of both sides of each card prior to mailing and keep the photocopy in your permanent records for the Phaeton Motor Home.

Customer Relations

If you wish to schedule maintenance or service or wish to order parts, you should notify your local Authorized Tiffin Motorhomes Dealership to set up an appointment. If you are unsure of the location of your nearest, authorized Tiffin Motorhomes Dealership, please access the Tiffin Motorhomes website at www.tiffinmotorhomes.com and then click on the "find a dealer" button, then click on the appropriate section of the United States nearest your location, then select the closest dealer by clicking on that dealer's number—the dealer's name, address, and telephone number will then be displayed for your use.


Specification Labels

There are two main numbers used to identify your Phaeton. The Vehicle Identification Number (VIN) is the legal identification of the completed vehicle. The VIN is the number used by the state for vehicle identification and registration. Additionally, there is a Tiffin Motorhomes identification number. The Tiffin number is needed when you plan to make an appointment for service or ordering parts through your Tiffin Motorhomes Dealership or Service Center. This number can be found on the side of the dashboard. A typical sample of this identification label is shown, above, on the right.

TIFFIN MOTOR HOMES	
MODEL NO.	<input type="text"/>
SERIAL NO.	<input type="text"/>

Another label affixed to your Allegro Bus is the Recreational Vehicle Industrial Association (RVIA) Weight Label which is a required label for your vehicle. Tiffin Motorhomes, a manufacturer-member of RVIA, has the obligation to disclose the following information, at minimum, to the purchaser of the motor home:

- An indication of the contents of the RVIA weight label affixed to the motor home.
- A concise explanation of the following items:
 - Vehicle Weight (VW) distribution.
 - Proper weighing techniques to be used to weigh the vehicle.
 - Specific definitions for the following terminology:
 - **Gross Vehicle-Weight Rating (GVWR)** – This is the maximum permissible weight of the motor home when it is fully loaded.

Recreational Vehicle Industrial Association (RVIA) Weight Label			
Tiffin Motorhomes, Inc. 105 2 nd Street NW Red Bay, AL 35582 U.S.A. Telephone: (256) 356-8666 Facsimile: (256) 356-8219 E-Mail: info@tiffinmotorhomes.com			
Motor Home Weight Information			
Model Name:	40DH-Freightliner	Serial Number:	2403
		Year:	2002
Weight Terminology and Definitions			
GVWR	Gross Vehicle Weight Rating is the maximum permissible weight of this fully-loaded motorhome.		
UVW	Unloaded Vehicle Weight is the weight of this motorhome, as manufactured at the factory, with full fuel, engine oil, and coolant.		
SCWR	Sleeping Capacity Weight Rating is the manufacturer's designated number of sleeping positions multiplied by 154 pounds (70 kilograms).		
CCC	Cargo Carrying Capacity is equal to GVWR minus each of the following: UVW, full fresh (potable) water weight (including water heater), full LP-Gas weight, and SCWR.		
GCWR	Gross Combination Weight Rating means the maximum allowable loaded weight of this motorhome and any towed trailer or towed vehicle.		
Cargo Carrying Capacity (CCC) Computation – Example			
Item	Description	Weight (Lbs.)	Weight (Kg.)
GVWR	Gross Vehicle Weight Rating	14,050	6,386
Minus UVW	- Unloaded Vehicle Weight	-9,250	-4,204
Minus Fresh Water weight	- Fresh water weight of 106 gallons @ 8.3 lbs/gallon (3.8 Kg./gallon)	-880	-376
Minus LP Gas	- 80 gallons @ 4.2 lbs/gallon	-336	-149
Minus SCWR	- 6 persons @ 154 lbs/person	-924	-420
CCC*	*(Note: Dealer-installed equipment and towed-vehicle tongue weight will reduce CCC.)	2,660	1,237
WARNING: Consult Owners Manual(s) for specific weighing instructions and towing guidelines including auxiliary brake requirements for any towed trailer or towed vehicle.			
<small>Revision Date: 24 June 2002</small>			

- **Unloaded Vehicle Weight (UVW)** – This is the weight of the motor home, as built at the factory, with full fuel, engine oil, and coolants. The UVW does not include cargo, fresh water, LP gas, or any dealer-installed accessories.
 - **Cargo-Carrying Capacity (CCC)** – This is the maximum weight of all occupants including the driver, personal belongings, food, fresh water, waste water, LP gas, tools, tongue weight of towed vehicle [if any], dealer-installed accessories, and the like. The CCC is equal to or less than the GVWR minus the UVW.
 - **Gross Combination-Weight Rating (GCWR)** – This is the value specified by the chassis manufacturer as the maximum allowable loaded weight of the motor home with a towed trailer and/or vehicle [if any].
 - **Sleeping-Capacity Weight Rating (SCWR)** – This is the maximum weight capacity of the combined number of persons (i.e., number of people multiplied by 154 pounds per person) permitted to sleep within the vehicle.
 - **Gross Axle-Weight Rating (GAWR)** – This is the maximum allowable weight for an axle; the GAWR considers the weakest link in the tire, wheel, brakes, hubs, axle, springs, and attaching parts. To illustrate, if the axle is rated at 15,000 pounds and the tires are rated at 3,200 pounds each as a dual installation; then the maximum GAWR would be 12,800 pounds for a four-tire vehicle
- **Towing Guidelines** – Specific weighing instructions and guidelines are furnished in the Owner’s Manual (see below and also in Chapter 2).

Weighing Procedures for the Phaeton

To weigh the motor home properly, the motor home should be level when the weighing process is performed. Your Phaeton motor home has been designed and built in compliance with the recommended limits of the major-component/system suppliers to provide a realistic CCC. It is up to the final user to provide even distribution of the loads brought into the motor home to prevent uneven loading. Once the vehicle is loaded, it can be taken to any drive-on scales or individual-wheel scales to determine that the final weight is within specified limits for the motor home. The procedure which can be used is as follows:

First, drive the motor home onto the scales so that all wheels are on the scales; this provides the gross vehicle weight (GVW) of the vehicle and can be recorded as such. The GVW should not exceed the GVWR specified for the vehicle. Second, drive the motor home so that the front wheels are off the scales and only the rear wheels remain on the scales; this provides the total weight of the vehicle, save for the front axle. This weight should not exceed the total rating of the axles remaining on the scales. The front axle weight is determined by subtracting the weight from the GVW that was obtained in the

first step, performed earlier. The result should not exceed the listed front-axle weight rating. Chapter 14 contains more specific axle-weight determinations.

Weight Distribution Throughout the Motor Home

To assure the maximum stability of the motor home under static (i.e., parked) and dynamic (i.e., moving) conditions, the distribution of the items to be carried and stored within the motor home and in the storage bays underneath the motor home should be performed in such a manner to strive for reasonably even side-to-side and front-to-rear dispersion of the weight of the stored items. This process will assure that the motor home is not “lop-sided” in weight distribution (i.e., all the stored weight on one side and/or mainly towards the front or the rear)—keeping a center of mass of the motor home essentially centered on a front-to-rear and side-to-side basis will also provide better control of the motor home when it is in motion.

Driving & Safety Instructions

Safety Considerations

Prior to using your motor home, especially for the first time or after a long period of non-use, please read thoroughly all the instructions in the Owner's Manual and the chassis-manufacturer's manual before attempting to operate your motor home. There are several safety considerations which you should realize and follow while your Phaeton is in motion. These safety considerations, as well as others meant to preclude any damage to the motor home, are listed in this chapter. Besides the driver, it would be well for the passengers to be familiar with these safety considerations and precautions, too.

Warning

Before your motor home is to be towed, be sure that you have read the entire Owner's Manual and that you fully understand the equipment on your motor home and how to use that equipment safely.

General Warning

Warning

Any portable, fuel-burning equipment (e.g., charcoal, propane, butane, wood) must not be used inside the motor home. Any use of such equipment inside the motor home may readily cause fires and/or asphyxiation by carbon-monoxide poisoning. Further, such unauthorized use would probably invalidate your motor-home insurance policy.

In general, there are several "common-sense" safety precautions that should be taken every time the motor home is to be used on the road. These precautions include:

- Only seats with seat belts should be used while the motor home is in motion; those seat belts should be worn by all people (driver, passengers) in the motor home at that time.
- While the motor home is moving, lock all seats in the forward-facing position to provide maximum safety for the users.
- While the motor home is moving, no one inside should ever stand or kneel on seats (e.g., young children).

- In the majority of states, it is the law that seat belts must be used (fastened snugly about the chest and hip areas), anytime the motor home is in motion, to provide desired protection in the event of a crash.
- Any fire extinguisher(s) should be inspected on a monthly basis to assure that each extinguisher is properly charged and ready for operation.
- Any smoke and/or carbon-monoxide (CO) alarm(s) should be regularly inspected and tested. If being used for the first time, the smoke and/or CO alarm should be properly activated and fresh batteries installed before the motor home is placed into service. Prior to any trip, the smoke and/or CO alarm(s) should be manually tested to assure their correct operation. Immediately replace any defective components (e.g., weak batteries). Never sleep in a motor home not having functional smoke and/or CO alarm(s).
- While the motor home is moving, the sleeping facilities are not to be used.
- In the event of an emergency, be sure to be familiar with all escape exits (doors, escape window). Do not use the emergency window as a routine exit; this is strictly to be used for emergency purposes only.

Prior to Departure

For your continued safety and convenience, the following is a representative “check list” designed to assure your safety while driving:

- Clean all windows, mirrors, and light lenses (front, back, side) to assure that you can “see” and “be seen.” Reposition any mirrors or other fixtures to provide an unobstructed view (front, sides, and back) from the driver’s seat.
- Remove or secure all loose fixtures (e.g., awnings, flags, antennas, portable lights) to keep them from falling from the motor home when the motor home is in motion.
- Make a “walk-around” visual inspection of the motor home to note any irregularities (e.g., loose trim) or problems (e.g., low tires); correct noted problems accordingly.
- Check all exterior storage-compartment and generator-compartment doors to make sure that they are properly latched. If need be, check inside all exterior compartments to make sure that all cargo and equipment are properly secured so that they won’t work loose and become hazards during sudden starts and stops.
- Check tires for proper inflation (i.e., cold inflation pressure: 100 psig); if the motor home has not been used, make sure that the “cold inflation” pressure is maintained. If the motor


home has very recently been used, make sure that the “hot inflation” pressure (see the tire-manufacturer’s literature to determine appropriate “hot inflation” pressure) is maintained. All tire pressures should be within 1-2 pounds (psig) of each other.

- Examine wheel lug nuts to assure their proper tightness. If any lug nuts were found to be loose, first check the fit of the wheel to the hub to make sure that the wheel is not mis-mounted which would produce a “wobbly” wheel when the motor home is in motion, then tighten the lug nuts.
- Check all fluid levels (e.g., engine oil, transmission fluid, coolant, power-steering fluid, brake fluid, battery fluid [if applicable], windshield-washer solvent) to assure correct levels are maintained. Fill any low reservoirs, as needed.
- DO NOT SUBSTITUTE any other fluids for specified oils, transmission fluid, brake fluid, or other hydraulic fluids—in most instances, substitutions are not acceptable and may void warranties.
- Prior to starting the motor-home engine, make sure that all lines (e.g., water, sewer) and electrical-power cords are disconnected and properly stowed.
- Assure that the leveling jacks are in the “travel” position.
- After entering the motor home, make sure that the electrically-actuated, retractable step has properly operated to retract the step fully before starting the engine of the motor home.

Driving

Various adjustments need to be made to assure the driver’s comfort and the safety of the motor home before starting and moving the motor home; these include:

- The driver should adjust the driver’s seat, the tilt steering, the exterior rear-view mirrors, and the instrumentation panel lighting (if night-time) for the driver’s comfort and safety. This is especially important for first-time use so that the driver may become accustomed to the “feel” of the motor home and know where the various adjustments are located “before the fact”; not after some need arises while the motor home is in service.
- The driver should be familiar with all gauges, instruments, switches, and indicators on the instrument

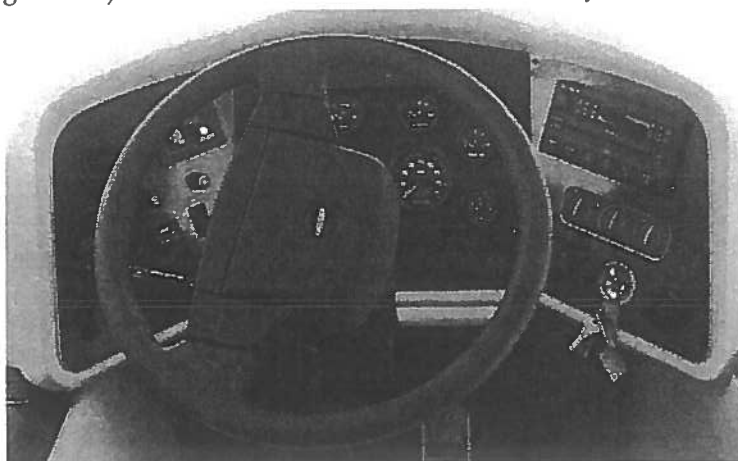

panel prior to driving. Should the driver encounter any “unknowns” on the panel, they should be investigated (via the Owner’s Manual) prior to departure so that the driver fully understands these items and their functions.


- One should never adopt a “learn as you go” philosophy, as there are too many controls and switches to be understood before the motor home is actually used. Please take the time to become thoroughly familiar with the entire instrument panel prior to using the motor home.
- Do not operate the cruise-control function during any extreme weather situations (e.g., snow, ice, sleet, heavy rain) or when road conditions are hazardous (icy, snowy, winding roads, city traffic) or when a constant speed of the motor home is not possible or if traffic conditions don’t warrant such.
- Avoid driving the motor home through any standing water. If deep enough, such water can wet the brake pads and cause fading of the brakes (i.e., loss of braking power) and lead to excessive sliding or pulling to one side or another. If one has driven through standing water, at the first opportunity safely to do so, check the braking action. If braking has degraded, lightly apply the brakes to allow the brake pads to dry—don’t use the motor home when the braking function is significantly reduced.
- Know the limits of operation of the motor home. Don’t try to achieve excessive speeds, climb overly steep hills, traverse overly long grades, attempt to use the motor home as an “off-the-road” (OTR) motor home, rapidly switch lanes, or rapidly accelerate or decelerate the motor home. When in doubt about the handling characteristics of the motor home, consult your chassis manual for information.

Fuels for the Motor home

Your motor home is designed to have several types of petroleum-derived fuels used in the routine operation of the motor home—these require prudent and safe handling to assure safety of the motor home and its occupants; namely:

Warning

Liquid Propane (LP) gas containers, gasoline, or other flammable liquids are not to be placed or stored inside the motor home because a fire or explosion may occur. LP gas containers are equipped with safety valves that may relieve excess pressure by discharging gas into the atmosphere—any containment of that vented LP gas constitutes an explosive hazard.

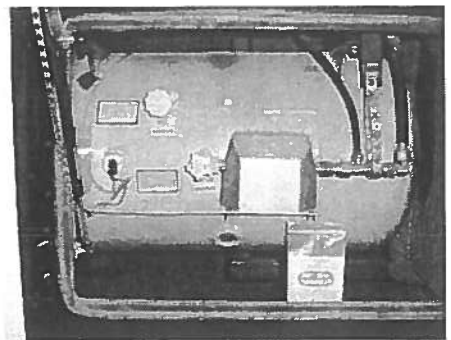

- Anytime the motor fuel (i.e., diesel fuel) or the LP tank is to be filled, the motor home engine is to be turned off, all pilot lights must be extinguished, and appliances turned off. Further, during any filling operation or connecting/disconnecting of any LP tanks, a NO SMOKING policy should always be observed. In a similar manner, any other comparable devices of the motor home users (e.g., butane camp-lights, propane lights and grills) should be treated in a similar manner to assure the safety of all concerned.
- NEVER use an open flame to test for LP gas leaks or to examine the fluid levels in the fuel tanks.
- After filling any LP system, immediately replace and secure all protective covers and caps.
- After closing the LP valve, close and securely latch the LP door to prevent unintentional access or damage.
- NEVER connect natural gas to the LP gas system—LP gas and natural gas are not interchangeable.
- NEVER use any other “burning” equipment (e.g., charcoal grills, wood stoves, butane lights, propane lights inside the motor home—doing so may cause fires and/or asphyxiation.



Liquid Propane (LP) Gas System


A warning label is conspicuously located near the LP gas container; that label reads:

Warning

DO NOT FILL the LP Container(s) to more than 80% of capacity.

Any overfilling of the LP gas container(s) can result in uncontrolled gas flow—a prime condition for a fire or explosion. The LP container should only be filled to 80% of its capacity; the remainder of the cylinder space is an air space to contain expansion of that liquid when subjected to varying ambient-temperature conditions. Filling in excess of 80% of the liquid volume of the container reduces that air space and, thus, creates a condition for possible over-pressurization of the container.

All LP appliances in your motor home have been approved for use in motor homes by a nationally-recognized testing laboratory (i.e., UL and CSA certified). When properly used, LP gas is a clean-burning fuel which can be dependably

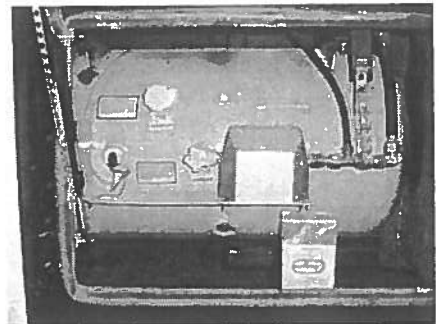

used. In actuality, the LP container contains liquid propane under high pressure. The liquid, when it passes through the tank valve to a lower pressure, vaporizes into a gas, and then passes through a regulator to maintain a constant pressure. This gas, then, is the actual fuel distributed through the LP-gas manifold system to the LP-based appliances used in your motor home.

LP-appliance lighting problems are typically caused by an improperly-adjusted gas regulator. NEVER attempt to adjust or reset the gas regulator yourself, as an authorized service technician is needed to make these adjustments. As a good preventive-maintenance activity, the regulator should be checked annually by a service technician and also before every extended trip.

Even though the LP-gas system is leak-checked and verified at the factory at the time of manufacture, normal usage (travel vibrations, etc.) could loosen the fittings. Consequently, it is wise to check the gas fittings periodically for leak tightness.

One can daub some leak-detector solution (e.g., a "liquid-soap"-like solution) on all the fittings, connections, and junctures when the system is under pressure. Should there be any leaks, small bubbles will appear at any leak sites.

Generally, loose fittings can be tightened to stop the leaks. If this process doesn't work, then one must shut off the main gas valve at the LP cylinder(s) and immediately consult an authorized service technician to determine what repairs are necessary. Leaks may also be detected by noting a sulfurous odor (i.e., rotten eggs). DO NOT search for a leak by using a match or open flame.

Warning

When the motor home is not in use, be sure to close the main LP gas valve at the tank. When the LP gas tank is to be refilled, close the main valve to preclude the chance of pilot lights possibly igniting fumes from the LP fuel. As some LP-gas appliances (e.g., refrigerator, furnace, water heater) have Direct Spark Ignition (DSI) systems, it is very important that these appliances be turned off when the LP gas is off. The DSI boards will continue to work (i.e., emit an ignition spark) even when there is no LP gas available.

LP Gas Regulator

The LP gas regulator is the most critical element of the LP-gas distribution system. The regulator converts the high-pressure LP gas from the tank into a reduced-pressure LP-gas supply suitable for use in the various appliances in the motor home. One should regularly inspect visually the regulator system. If any damage or corrosion is noted, contact an authorized service technician to inspect and repair or replace the regulator.

Do not attempt to adjust the regulator yourself; the regulator has been pre-set at the factory. Only a qualified LP service technician using specialized equipment should adjust the regulator.

LP Distribution System

The primary LP distribution system in the motor home is a black, steel pipe running the length of the motor home. The secondary distribution lines running from this main distribution system are usually copper tubing with flare fittings. If any of the gas lines break, do not attempt to splice them—always run new lines to maintain the safety of the motor home. It is strongly recommended that only qualified service technicians perform this work.

Remember, the main valve at the LP gas tank must be closed whenever any gas appliance is to be installed, removed, or serviced—this process prevents LP gas leakage which could result in a possible harmful explosion. If the odor of LP gas is ever detected, immediately discontinue use of any gas appliances and seek the services of a qualified service technician.

Recommended Precautionary Practices

The following practices are recommended to assure continued safety and reliability of the LP gas system; these are, of course, representative; not necessarily exhaustive. In all cases, use common good sense in the use of the LP system.

- Visually inspect the LP fill valve before any refueling operation to look for foreign materials or debris; remove, as necessary, to assure a leak-tight connection.
- Prior to any re-fueling operation of the LP gas system, shut off all the pilot lights.
- NEVER, under any circumstances, check for LP gas leaks with any type of open flame; doing so would probably cause an explosion and subsequent fire.
- Periodically inspect visually the entire LP gas distribution system; do so at least annually and before any major trips. Should problems be noted, seek the services of a qualified service technician to make necessary repairs and perform any maintenance.

Warning

The LP gas distribution system in your motor home is designed for liquefied petroleum (LP) gas ONLY. DO NOT attempt to connect and use any natural-gas or butane-gas systems with this LP gas system.

Fire Safety

As with any enclosed system containing the three required conditions for fire (i.e., combustible materials, oxygen, ignition sources), there will exist the possibility of fire. Tiffin Motorhomes has taken every precaution and design practice to minimize or negate this possibility, but the final determination

rests with the owner and user of the motor home. Accordingly, it is in the best interests of the owners, users, and their guests to be aware of basic fire-safety practices and procedures and those particular features that Tiffin Motorhomes has provided for fire safety.

Fire Extinguisher

The Phaeton is equipped with a fire extinguisher (located on the floor between the passenger's chair and the passenger's console) rated for both Class B (i.e., grease, gasoline, diesel fuel, flammable liquids) and Class C (i.e., electrical) services—these are typically the most likely types of fires to be expected in motor homes. Read and understand the accompanying owner's manual on that extinguisher (found in your Owner's Information Package) and remember the location of the extinguisher. In an emergency, you won't have the time or presence of mind to do so then.

These types of fire extinguishers are pressurized, mechanical devices and require that appropriate care be used in their safe storage and use. The owner's manual will provide necessary guidance for the proper storage, handling, and use of the extinguishers. Prudent preventive maintenance suggests monthly inspection of any fire extinguisher to assure that it is sufficiently pressurized (i.e., the needle on the gauge is in the "normal" zone) and that the mechanical components are not blocked in any way.



Do not test a fire extinguisher by partially discharging the unit—this will cause a loss of pressure and may lodge some fire-retardant materials in the valve mechanism and cause the extinguisher to continue to vent slowly down to zero pressure. Rather, if an extinguisher is ever partially used; continue its use until the unit is completely discharged then have the fire extinguisher fully recharged at an appropriate service center (one can call any fire department for information on having an extinguisher recharged in that particular locality).


DO NOT wait a long time to recharge an empty fire extinguisher; you'll never know when it may be needed.

Should a fire occur inside or around the motor home, evacuate the motor home quickly and calmly—do not panic. In the event of heavy smoke or extensive flames, keep low (crawl if you must) and make your way to the nearest exit (door, emergency window) and leave. If the fire involves a fuel source (e.g., diesel fuel, LP gas); consider the probability of an explosion and move sufficiently far away to minimize personal harm. If such is available, immediately place a call to the local fire department (or ask someone nearby to do so) to report the fire. Consider the cause and the consequences of the fire and the risks associated with possibly fighting the fire yourself before trying to extinguish it—**DO NOT** expose yourself or others to unnecessary danger.

Smoke Detector

The Phaeton motor home is equipped with a battery-operated smoke detector located on the ceiling in the living area of the motor home. Read and become familiar with the operation and periodic testing of

this detector. The smoke detector should be tested on a weekly basis, before each trip, and after any period of storage of the motor home. If a low-battery condition is noted or the alarm “chirps” to indicate a low-battery condition, immediately replace the battery. It would be prudent to keep replacement batteries in the motor home for any in-transit replacements so that the smoke-alarm capability is never compromised. DO NOT disable the smoke detector for any transient, false alarm (e.g., cooking smoke, dusty furnace, tobacco smoke); rather, ventilate the motor home with fresh air and the alarm will reset.

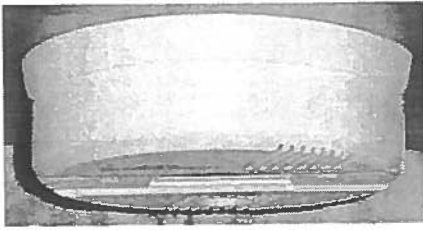

Emergency Exit Window

In the rear of the motor home, there is an emergency exit window in the bedroom—this window is designed for an emergency exit when it is not practical to exit by the door [also an emergency exit] in the front of the motor home. This window is readily noticeable by its red handle and the red “EXIT” label on that window.



To use this window as an emergency exit, lift the handle and push outward on the window. As required, the window can be closed by pulling the window inwards and then lowering the handle to latch the window back in place. When the motor home is to be parked, it would be wise to note where this window will be so that this exit won't be blocked (e.g., against a tree, pole, or wall).

Parking Procedures

To park the motor home in any unfamiliar terrain, examine the prospective site for surface irregularities, slopes or inclines, and other discontinuities (i.e., stumps, rocks, external connections for power/water/sewage) and also examine the area immediately above the proposed parking site for obstructions (e.g., tree branches and limbs, signs, overhead wiring).

If the motor home is to be backed into the proposed parking site, strive to have that site be on the driver's left-hand side, as this will allow the driver to watch the rear of the motor home. Back up slowly and use the side mirrors and the back-up camera as a guide or, better yet, have another person outside provide supplemental guidance to help park the motor home.

When the motor home is finally situated, shift the transmission into neutral, set the air brakes, and then turn “off” the engine. Activate the leveling-jack system (see Chapter 9 for more detail) to level and stabilize the motor home.

If the motor home is to be powered externally, connect the 120 VAC power to the motor home. Turn “on” the LP gas valve at the LP tank. Connect the fresh-water supply and sanitize the water systems (see Chapter 11), as needed. Connect the waste drain hose to the external sewer hook-up. Start the

refrigerator, water heater, and furnace; as warranted. Light the oven pilot light, as needed. Certain appliances, such as the refrigerator, will not work properly, if the motor home is not level; so be sure to complete the motor home-leveling process before activating any of the appliances.

Towing Hitch

The Phaeton is fully capable of towing typical motor vehicles; the motor home is equipped with a Class 3, 10,000-pound towing hitch and associated wiring connector. The motor home is capable of towing light loads and instructions for such are found in the chassis-manufacturer's literature in the Owner's Information Package provided with the Phaeton.

The total weight of the motor home and any vehicle towed by that motor home must not exceed the Gross Combined Weight Rating (GCWR). When the motor home is being weighed, remember to account for passengers and their locations in the motor home. **Any vehicles to be towed by the motor home should have adequate active braking.** The wiring connector provided is a standard four-pin connector.

Heating & Air Conditioning


Furnace

Warning

Never attempt to modify the furnace. To do so may cause fire, explosion, carbon-monoxide poisoning, or asphyxiation. If the furnace is malfunctioning, immediately shut the unit "off" and call a trained service technician to make necessary repairs as soon as possible.

The Phaeton motor home is equipped with a forced-air furnace fueled by LP gas. The furnace is controlled by the wall-mounted, thermostats located inside the motor home (one in the front of the motor home; the other in the master bedroom)—these thermostats control both the heating and air conditioning for the motor home.

In the heating mode, the furnace heats air which, in turn, is circulated through ductwork in the floor of the motor home. If any obstruction(s) block the floor vent(s) or air-return register, then the furnace will not function properly. Therefore, any items stored under the cabinets should be carefully stowed to prevent damaging or crushing the furnace ducting or blocking the warm-air return.

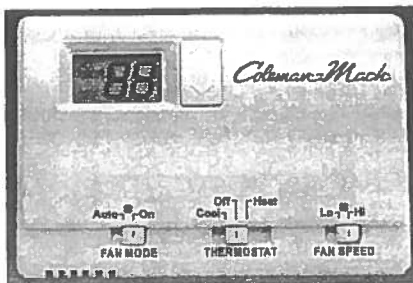

When a furnace is being used for the first time, there may be an initial "burn-off" of manufacturing compounds or residues left on the heat exchanger or in the ductwork which could produce odors, fumes, and possibly some smoke. This occurrence is normal and should not cause concern, unless it persists for an excessive amount of time.

To minimize the after-effects of this "burn-off" process, the initial use of the furnace should be done with all the doors and windows open to permit normal air circulation to dissipate these odors and fumes.

For routine operation of the furnace, set the thermostat to the desired temperature setting and then turn "on" the thermostat; in about a minute, the furnace should begin to operate and warm or hot air should be coming through the ductwork.

To shut down the furnace, turn the thermostat to the "off" position. Even though the thermostat may be turned "off," the furnace system will continue to run for about a minute or so to permit a gradual cool-down of the heating system which is normal.

On a regular basis, thoroughly clean the complete furnace and air-tube passageways to remove dust, lint, and any other possible obstructions. Leak-test the entire LP gas system at least annually. Also check and clean the air-blower system annually.

Any access hatches to the furnace are for authorized service personnel only, as there are no user-serviceable parts on the furnace. Accordingly, do not attempt to tamper with the interior of the furnace.

Warning

Be cautious when washing the exterior of the motor home; water should never be sprayed directly into the furnace vent. Should any water be forced beyond the rain baffles into the furnace vent, the furnace may rust which, in turn, may cause improper combustion and produce unwanted by-products of combustion.

Before the beginning of each travel season, the furnace should be thoroughly cleaned and inspected. Any obstructions, debris, or lint which may obstruct free air flow or impede the operation of the air-circulation system should be removed. For example, accumulated dust or lint could possibly obstruct the orifices for the pilot light or may accumulate on the blower blades and unbalance the operation of the blower. Additionally, any debris in the ductwork, when heated by the furnace, could emit unpleasant odors or possibly become a fire hazard.

Consequently, the furnace system (including ductwork) should be periodically cleaned; annually is recommended unless the motor home is subjected to dust levels significantly greater than average; in which case more frequent cleaning is recommended. The Owner's Information Package provides recommended cleaning tips and procedures; when needed, a more thorough cleaning should be performed by a qualified service technician.

Air Conditioning System

The factory-installed air-conditioning system is designed for 120 VAC power supplied either from the external power cord or from the generator. Any unnecessary heat loading (e.g., exposure to direct sunlight for long periods of time; transmittance of sunlight through the windows) will work the air conditioning system harder and may compromise the desired results. Accordingly, if the air conditioning system is to be used, park the motor home in as shady location whenever possible and close drapes on those windows exposed to direct sunlight. Additionally, any heat-producing sources (e.g., oven, unnecessary lights) within the motor home will work against the air conditioning system; so strive to minimize their use.

The air conditioning system is the major consumption device of electrical power in the motor home. When this system is being used in an RV park, cumulative use of these air-conditioning

systems by the resident vehicles can create a bigger demand for electrical power than is actually available. Accordingly, at times a “brown-out” condition may arise—this is when the AC voltage normally available drops to a lesser value (e.g., 10-20% below normal or more).

“Brown-out” conditions cause appliances to draw greater currents to make up for the reduced voltage; thereby causing circuit breakers to trip or fuses to blow. Under such conditions, your own motor home is not at fault; simply reset your breakers and/or replace your fuses. Should such conditions continue, one may wish to turn reduce the electrical load (in this case, turn “off” the air conditioning system for awhile) or start the electrical generator.


To cool the motor home, the thermostat inside the Phaeton is used—this is the same thermostat which controls the furnace functions (described earlier). The air-conditioned, cooled air is forced through the ducts in the top of the motor home to the various vents for distribution throughout the motor home.

By adjusting the relative openings of these vents and the doors connecting various sections of the motor home, different zones of air conditioning can be generated (e.g., warmer bedroom, cooler living room) to suit the user’s requirements.

Thermostatic Controls

The following is a brief overview of how best to use the thermostat. For more detailed instructions, please consult the thermostat literature in the Owner’s Information Package.


1. Turn “on” the power switch on the thermostat(s).
2. Use the Mode switch to select the desired function (e.g., COOL, OFF, HEAT). Note: In the “COOL” mode there will be a delay of several minutes before the refrigerant in the air-conditioning system begins to cool the motor home, as the compressor is on a time-delay circuit and it must also cool the ductwork to the vents first.
3. Select the Fan Mode operation (AUTO or ON) and the Fan Speed operation (LO or HI) to select fan speed desired. Select the Calling operation (YES or NO) to select desired operation (see Coleman manual).
4. Press the Up and/or the Down buttons to set the desired temperature for the motor home.
5. If your vehicle should contain more than one control zone, press the zone button to select the desired zone and then repeat the procedures from Step 2 onwards for each control zone.

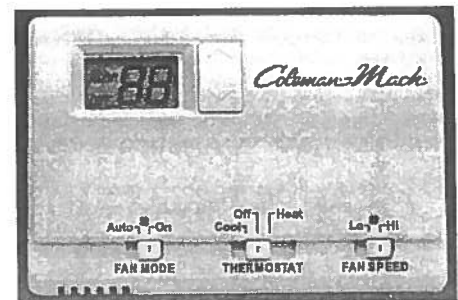

NOTE: If the thermostat is turned “off” or the thermostat loses power (i.e., power failure), the air-conditioning system will resume operation at the last settings programmed into it when electrical power is restored.

Liquid Propane (LP) Tank

The Phaeton is equipped with an ASME (American Society of Mechanical Engineers)-approved LP tank which is equipped with an automatic pressure regulator. This tank contains liquid petroleum fuel under high pressure. As this fuel passes through the main valve and through the regulator, it is converted into a gas and its pressure is reduced to a safe level for use within the motor home.

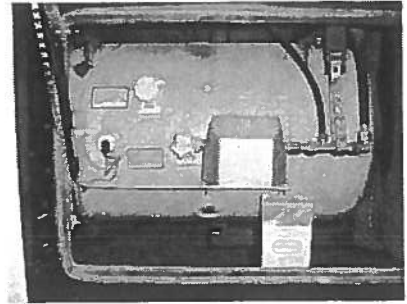

A LP gas-distribution system distributes the gas to those appliances using such in the motor home. The “heart” of this LP gas distribution system is the regulator and that regulator should only be adjusted by a qualified service technician. Most of the problems encountered in lighting the pilots of these appliances are caused by regulator mis-adjustments.

The major component of the LP gas supply is a manifold pipe which runs lengthwise underneath the motor home floor. From this manifold, the various gas appliances are connected by copper tubing with flared fittings so that connections and disconnections can readily be made, as needed.

Should any of the secondary tubing develop a leak, either on the tubing proper or at the fittings; do not attempt to splice any of these lines. Instead, have a qualified service technician run a new length of tubing to the appliance of concern and then have that line leak-tested before placing it in normal operation.

To remove, repair, or replace any gas-operated appliance; always close the main gas valve at the LP tank—this measure will provide an additional element of safety to prevent gas leakage and possible, subsequent explosion hazards.

However, if a gas leak is noted or suspected, turn “off” the main valve and keep the LP gas system “off” until that system is inspected by a qualified service technician as soon as possible. Do not delay in addressing any possible gas leaks with appropriate service because of the inherent hazards to safety.

Warning

When the motor home is not being used, the main LP gas valve must be turned “off.” Also, turn “off” the main valve when the LP gas tank is to be refueled to avoid the possibility of ignition fuel fumes by the pilot lights. All gas valves on the gas-operated appliances with Direct Spark Ignition (DSI) should also be in the “off” position during refueling and/or maintenance operations. DO NOT store LP, diesel, propane, butane, or other flammable liquids inside the vehicle as these represent a very real fire hazard and possible threat to life.

LP Tank Filling Practices

Any LP gas tank associated with the motor home should never be filled to more than 80% of total capacity; filling should always be done only when the motor home is leveled. If the motor home is not level, the tank may be overfilled (i.e., more than 80% of capacity) and, thus, subject the motor home to possible fire or explosion from resultant uncontrolled gas flows.

LP Gas Regulator

As noted earlier, the LP gas regulator is the “heart” of the LP gas distribution system. This regulator reduces and controls the pressure of the gas on the outlet end to provide a constant supply of gas at a constant pressure to the gas-operated appliances. The regulator has a vent to relieve excess pressure on the inlet side of the regulator, should excess pressure develop in the gas tank and connecting gas line to that regulator inlet. The vent would normally release the excess LP gas to the atmosphere until the over-pressurization condition is eliminated. This vent should be regularly checked to assure that it is not clogged or obstructed. If that vent is blocked from normal operation, component or system failures may result. If periodic visual inspection indicates any sign of corrosion or degradation, contact a qualified service technician to repair the regulator as soon as possible; DO NOT operate the LP gas system with any faulty component in place.

Occasionally, the inherent moisture in the LP gas can cause a freeze-up of the regulator when the gas passes through the regulator. The regulator reduces the high pressure of the gas on its inlet side to a reduced pressure on its outlet side by permitting a controlled expansion of the gas through the regulator—this gas expansion necessarily cools the gas (by means of the Joule-Thompson effect) and, if cooled enough, may cause any moisture content to freeze. To minimize or negate this possibility, always keep the main valve to the LP gas tank closed when the system is not in use. When the LP tank is empty, keep the main valve closed until re-filling is to be performed—this process will keep any moisture-laden air from back-flowing into the gas system and trapping unwanted moisture in the LP gas tank. If an empty LP gas tank has been exposed to the atmosphere for an extended time, let a qualified service technician purge the tank before its next filling operation.

Important

When a LP gas regulator is installed or re-installed, the regulator must always be installed with the gas diaphragm vent facing downwards. For more information, consult the manufacturer’s literature in your Owner’s Information Package that came with the motor home.

LP Gas Detector

Warning

Liquid Propane (LP) is extremely flammable and, when contained, explosive when mixed with air. Consequently, never check for leaks in LP gas lines or appliances with an open flame or sparking devices. Do not use any ammoniated or chlorinated household-type detergents for "bubble testing" possible leak sites—these detergents may generate fissures or cracks on the metal tubing (e.g., copper) and flared fittings (e.g., brass). Have your LP gas system leaks repaired ONLY by a qualified service technician; do not attempt these yourself. Keep the main valve to the LP gas tank closed and all appliances turned "off" when the motor home is stored. If any of the valves do not close "leak-tight" by hand, have those valves examined and repaired by a qualified service technician. DO NOT, under any circumstances, attempt to use a faulty LP gas system and/or appliances as such represents a safety hazard.

Since LP gas (i.e., liquid propane) is more dense than air, the LP gas will naturally settle to the lowest point in an enclosed space—in the motor home, this would be the floor. Because of this fact, the LP gas detector is necessarily mounted close to the floor. To activate the LP-gas sensor on this detector for the first time, remove the sensor activation strip, if such was not performed during the pre-delivery inspection.

Please check the LP gas detector to verify that the detector was properly activated and is ready to provide the necessary protection. If in doubt, please contact any qualified service technician for more detailed assistance.



This gas detector or sensor is also sensitive to other, related petroleum-based products, such as butane (present as a propellant in some hair sprays or in butane lighters). Should the gas detector sound an alarm from a suspected butane source, one can reset the alarm by pressing the reset button to stop the alarm temporarily for 60 seconds or so.

If the alarm persists in re-arming and giving further alarms; ventilate the motor home (by opening doors and windows) and then check for possible LP gas leaks. If the leak cannot be readily found, then close the main valve to the LP tank and turn "off" all gas appliances and then take the motor home to a qualified service technician after the ventilation process is concluded and the doors and windows again shut.

Major Appliances & Accessories

Refrigerator


When the refrigerator is in the “LP gas” mode, make sure that the main LP gas valve is in the “on” position before attempting to start the refrigerator. Please note that the refrigerator is equipped with a semi-automatic energy selector (AES) control system which can set automatically to switch between a 120-volt AC system or a LP-gas operation system.

Warning

The majority of LP gas appliances used in motor homes normally vent to the outside of the motor home. When your motor home may be parked in close proximity to a fuel pump (i.e., during re-fueling operations), it is possible that the diesel fumes could enter this type of appliance and possibly be ignited by the burner flame thereby causing a fire or explosion. Accordingly, please use extreme caution when re-fueling the motor home.


A 12-volt power supply is required for proper operation of the electronic control panel. For electrical operation of the refrigerator, either the external electrical power line must be connected to the motor home or the on-board electrical generator must be running to provide the necessary 120-volt AC power. To operate the refrigerator in the LP-gas mode, the main LP gas valve must be “open.”

To start the refrigerator [*optional side-by-side refrigerator shown in picture*], press the main power “on/off” button to the “on” position. To use the two-way automatic mode, push the “Auto/Gas” mode selector to the “on” position. When this is done, if 120-volt AC is available to

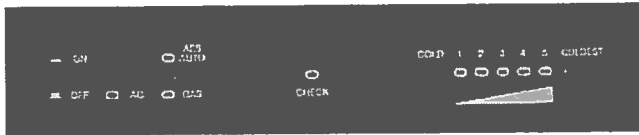

the motor home, the AC mode indicator light will light and indicate that the AC power is available to the motor home. However, if the 120-volt AC is not available, then the gas mode indicator light will be illuminated indicating that the refrigerator will be operating on the LP gas supply.

To operate the refrigerator in the “gas only” mode, push the “auto/gas” selector switch until the gas indicator light comes “on.” After about 45 seconds, the burner should ignite and provide normal operation. This initial start-up process could take longer than 45 seconds as there may be air trapped in the gas line which must be purged before the gas supply starts flowing. If the LP gas does not ignite within the 45-second time interval, the “check indicator” light will come “on” and the “gas mode” light will go

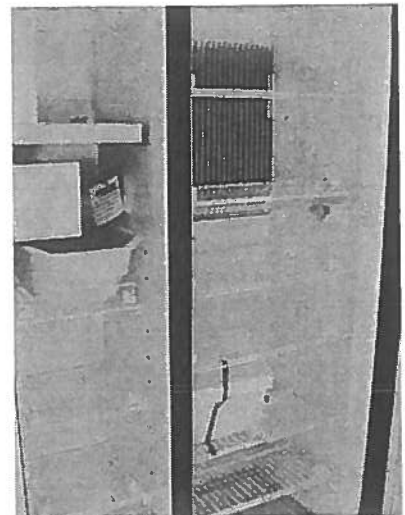


“off.” Should this occur, the controls have not ignited the gas burner in the gas mode. When the “check indicator” light is “on,” press the main power “on/off” button to the “off” position to reset this function. Do not continue to reset the gas operation if the “check indicator” continues to come “on” repeatedly.

NOTE: To operate the refrigerator in the LP-gas mode, the 12 VDC must be operational; otherwise, the refrigerator will not operate on LP gas. If the refrigerator is operating in the LP-gas mode and the 12 VDC is disconnected, the refrigerator will cease operating.

On the refrigerator, the thermostat controls both the gas and electrical operations—this eliminates the necessity of re-setting the temperature each time one switches from gas to electrical service or vice versa. Press the temperature selector button until the light near the desired setting is illuminated. After initial start-up, the thermostat should be moved from the coldest setting to the desired setting, which is usually around mid-range on the thermostat.

Microwave Range / (Optional) Convection Range

The Phaeton contains a microwave range (convection feature, optional). All microwave ranges operate on 120-volt AC electrical power, supplied either by the external electrical hook-up or by the on-board electrical generator in the motor home. Between the power source(s) and the microwave range is a surge protector to protect the unit from electrical transients and power surges.

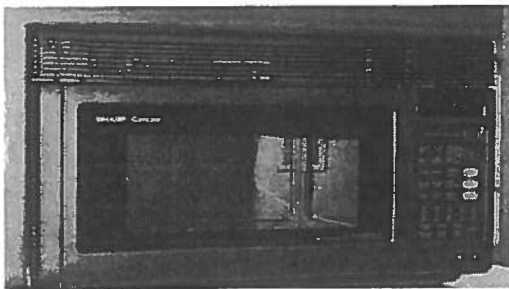

Touch-pad controls on the microwave range are used for operating the range (i.e., cooking temperature, mode, power level, and cooking time)—see the product owner’s manual for specific instructions. For basic operating instructions, care, and maintenance for the proper use of the microwave/(and optional convection) range, please consult the specific manual in the Owner’s Information Package.

Air-Filtration Fan

In the Phaeton, the “exhaust” or air-filtration fan is built into the microwave and its function is to filter the air only; it does not exhaust to the outside. This range hood is equipped with a multi-speed fan and a light for convenient use. The hood should be used whenever any cooking is performed to filter any airborne cooking residues and heated air.

Additionally, the range hood can be used as supplemental filtration of other odors and gases including tobacco smoke, candle fumes, and related vapors. The range hood contains filters which can be removed and cleaned or replaced to assure normal operation. Consult the particular owner’s manual contained in the Owner’s Information Package.


Cook-Top and Oven

The Phaeton is equipped with a three-burner recessed cook-top and oven (optional: cook-top only). The oven has a piezoelectric ignition source, rather than a pilot light, to start the oven. To light the burners, turn “on” the gas control knob, wait a couple of seconds, then push the red DSI (direct-spark ignition) button until a flame appears. If the burner does not start after a few attempts, discontinue the process, let the released gas dissipate, then try the process again. The burner knobs operate in a counter-clockwise (CCW) manner and must be gently pushed inwards as they are being turned.



If the oven doesn't have a piezoelectric ignition source, light the oven by pushing inward on the oven control knob and rotating it CCW to the “pilot on” position, then light the oven pilot light located at the back left-hand side of the oven burner—this may take a few seconds until the air in that line is purged and replaced with the LP gas. Do not attempt to adjust the oven pilot light as it has been factory-adjusted and factory-set. To extinguish the oven pilot light when use of the oven is concluded, push inwards on the oven control knob and turn that knob clockwise (CW) to the “off” position.

The Phaeton is equipped with a multi-burner cook-top having a countertop cover matching the same décor as the counters in the motor home. This cover both provides protection to the burners when they are not in use and additional counter space, as needed. Before any cooking on the cook-top is attempted, the hinged cover must be raised from the cook-top and locked in the upright position so that the cooking surface is free and unobstructed. Do not replace the cover immediately after using the cook-top; wait until those surfaces are cool to the touch before lowering the cover back into the “closed” position. Never use the cook-top range when the motor home is in motion. As a safety feature, the following label will be noted in the cooking area:

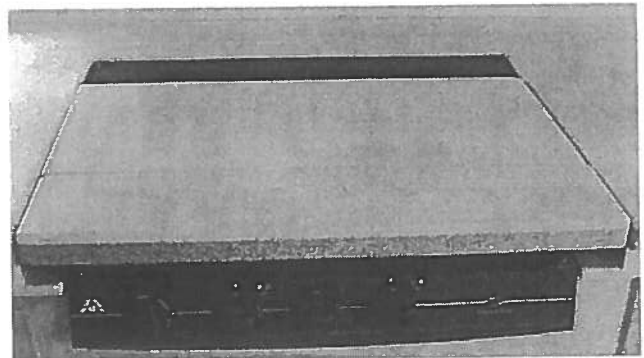

Warning

DO NOT USE cooking appliances as a heating source for the motor home. Cooking appliances require fresh air for safe operation. Before using any cooking appliance, make sure that an overhead vent or window is open and/or turn on an exhaust fan.

Remember that any LP gas-operated appliance in the motor home will be consuming oxygen in the motor home. If the motor home is totally closed during such operation, the oxygen level may be reduced (and the associated carbon monoxide level may be increased) thereby causing possible harm or death to the occupants through asphyxiation. Always use these appliances with proper ventilation.

DANGER – Notice -- DANGER

IF YOU SMELL GAS, YOU SHOULD IMMEDIATELY:

Extinguish any open flames, pilot lights, and all smoking materials. Do not touch or operate any electrical appliances or switches. Immediately shut off the gas supply at the main tank valve or supply connection. Open doors, windows, and other ventilation openings. Exit the RV to allow entrapped LP gas to dissipate. Have the LP gas system checked to locate and fix the source(s) of the leakage.


TELEVISION SYSTEM OPERATION

Television Antenna

The Phaeton motor home is equipped with a retractable antenna for television (TV) reception of all VHF (i.e., channels 2-13) and UHF (i.e., channels 14 upwards) channels. To deploy the antenna for proper reception of TV signals, turn the TV-antenna crank clockwise (CW) to raise the antenna; this should take about 10-15 turns until some resistance is noted. Then turn the power-booster switch (located in the front, left cabinet next to the front television) “on” to boost the signals to be



received. Once the antenna has been raised, slowly rotate the antenna to receive the best picture on the channel of choice—this rotation is accomplished by pulling down on the directional handle with both hands until it disengages from the ceiling plate and then rotating the antenna until optimal reception is realized.

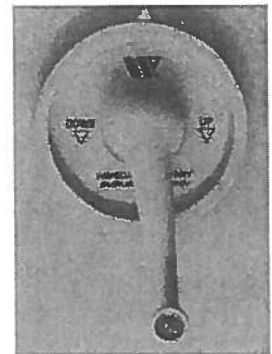

rotating the antenna until optimal reception is realized. If your location is within a metropolitan area, you may need to rotate the antenna for each different station desired to aim the antenna towards each particular station. If the location of the motor home is remote from any metropolitan area; the antenna, once positioned for a particular station, should be adequate for all other stations capable of being received. Some experimentation may be required to determine the “best” setting for each location of the motor home and the stations desired to be viewed.


Prior to moving the motor home, the TV antenna must be retracted. To lower the antenna, rotate the directional handle until the pointer on that handle is aligned with the pointer on the ceiling plate; then turn the elevating crank counter-clockwise (CCW) about 10-15 turns (until some resistance is noted) to

lower the antenna and lock it into its retracted position for travel. DO NOT partially lower the antenna; it must be either fully deployed (raised) or retracted (lowered)—any intermediate position will lead to damage to the antenna itself or to the motor home.

When the TV antenna is raised and adjusted, if the TV reception is weak, blurred, or of inferior quality; examine the connections from the TV to the antenna and make sure that the power-boost switch (shown above, left) is actually “on.” If the symptoms persist, then consult your authorized service dealer.


Television Satellite Dish Control (Optional)

The RV may be equipped with a TV Satellite Dish control system (Wineguard) to permit access to direct-satellite television. The television-receiver dish is controlled by a hand-cranked mechanism which deploys the dish and permits its rotation so that the desired signals may be received. Follow the directions in the Owner’s Manual for this dish-control mechanism to obtain the best orientation of the satellite dish for desired television reception. Remember, that any additional movement of the motor home after the satellite dish control has been set may possibly cause loss or degradation of satellite-television reception. In this case, please re-adjust the satellite dish to re-align that dish for optimal television reception.

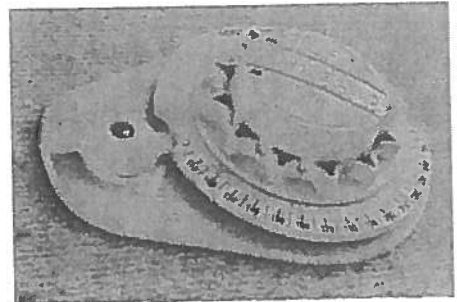

Television Sets

The television sets furnished with the motor home are cable-ready; one is in the overhead bay above the dash and the other is in the bedroom, depending on the particular floor plan of the Phaeton purchased. The televisions are powered by 120-volt AC electricity; therefore, the motor home must either be plugged into an external source of AC power or using on-board power from the generator. An optional inverter would also permit the 12-volt DC power to be converted into 120-volt AC for the television(s).

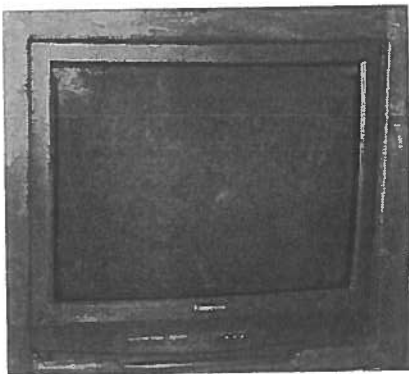

Detailed operation of the television(s) is provided in the accompanying owners manuals found in the Owner’s Information Package included with the motor home. Generic operations of the television would include a basic “on/off” switch, volume “up/down” control, channel “up/down” selector, and menu “up/down” selector—these functions are found both on the television set itself and on the accompanying remote that comes with the television set.

If the motor home has been wired for satellite TV, there should be an interior jack or jacks and an exterior jack to connect the satellite system. Consult your owner’s manual for the satellite system to determine the correct connections to be made.


VHS Video Cassette Recorder (VCR) (Optional)

The Phaeton motor home is equipped with a VHS VCR as part of the total entertainment system. The VCR operation is controlled by controls both on the VCR proper and the remote furnished with the VCR. To determine the best use of the capabilities of the VCR, consult the owner's manual furnished in the Owner's Information Package that came with the motor home. Specialized functions (e.g., operating all video equipment with one remote) may require specialized programming of the remote of choice to provide ease of operation.



Audio-Video Control Console

The Phaeton contains an audio-video control console (AVCC) to enable one to select where the TV signal is routed (i.e., front and/or rear televisions) and the VCR. To make the desired selection, simply press the appropriate button(s) to select what is to be viewed and where. The front television is selected by pushing button "TV 1" and the rear television (and outside television, as warranted) is selected via button "TV 2."

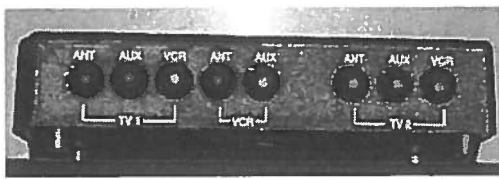


One can view a different channel or input source on each of the television systems. For instance, if one should select the "ANT" option for the front television, any channels available on the antenna system can be viewed on the front television. At the same time, if one selects "VCR" for the rear television, any VHS VCR tape can be viewed on the rear television. The "AUX" position permits connection to an external cable system, satellite dish, video games, or DVD player.

AM/FM/CD Stereo System

An AM-FM stereo system with cassette-tape and optional compact-disk (CD) player may be included in the motor home. This system is powered by the 12-volt DC system of the motor home and operates like any conventional car-stereo system. There are speakers mounted in the driver-passenger area of the motor home and additional speakers in the bedroom.



Home Theater System (Optional)

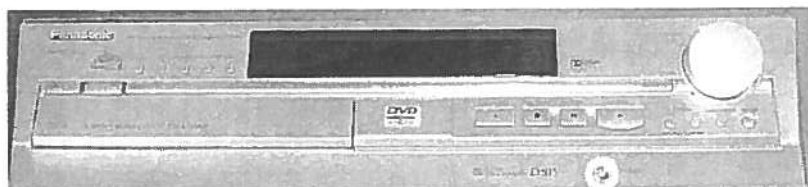

The motor home may have an optional home theater system which offers true surround sound for the television and also when DVD programs are viewed featuring the

Dolby Surround Sound system. As this home theater system offers many entertainment options, it is worthwhile to read the manual thoroughly before attempting extensive use of this system. This system will also play CDs and MP3 disks; among other media.

The stereo/video selector switch permits the user to select either the stereo speakers either in the dashboard or in the television. Before selecting either system, though, be sure that the radio switch at the driver's console box is in the "on" position—this provides the necessary 12-volt power source for the system. To select either sound system, one merely presses the selector switch until the corresponding light indicates which option has been chosen.

Should the switch be activated when neither the television nor the stereo is being used, there may be a slight amount of static noted on the speaker systems. In this event, merely press the selector switch to the neutral position or turn "off" the radio switch to eliminate that static.

The speaker-system components provided in the Phaeton are located in the front part of the cabin (driver's side and passenger's side, respectively) and, for full surround-sound systems, two additional speakers are located further back in the cabin in the kitchen & living-room area.



Although these speakers adjusted or oriented at the factory for proper sound distribution throughout the cabin, those speakers are readily re-adjustable to meet the specific needs of the owner.




A wing-nut on each mounting post of the speaker can be loosened, the speaker re-oriented to suit the owner's preference, and then that wing-nut can be re-tightened to lock that speaker into position. In this manner the speakers can be adjusted to the owner's personal satisfaction.

Certain system-setup CDs (sometimes available from the sound-system manufacturer or from a home electronics store) can be used with the home system to help in the positioning of the speakers for optimal surround-sound characteristics.

Cable & Telephone Jack

The Phaeton contains an exterior cable jack and also a telephone hook-up (shown in picture). This telephone connection permits the owner to access external telephone services (e.g., RV parks) so that these services are available for use within the motor home proper.



Within the motor home there are several telephone jacks (e.g., bedroom, living room) for connecting telephone(s), as desired.

Water Heater

Warning

DO NOT APPLY 110 VAC POWER to or LIGHT the water heater until after the water heater is filled with water and the water lines and heater tank are purged of any trapped air. Failure to do so will damage the water heater and may cause additional damage to the motor home.


Before the water heater is to be used, first fill the fresh water system and purge the water lines to and from the water heater by opening all the hot-water faucets until water steadily flows from each one and no “spurting” or “hissing” sounds are further heard. The water heater holds either 6 or 10 gallons of water and uses either the LP gas system or the 120-volt AC electrical system to operate that heater.

Proper and safe operation of the water heater requires that all safety information provided in the owner’s manual be read and understood before placing the water heater in service. Take the time to become familiar with that manual (provided in the Owner’s Information Package).

The water heater is designed for operation either with LP gas or 120-volt AC electricity. Both modes of operation are now presented.

LP Gas – Electronic Ignition Operation (6-Gallon and 10-Gallon Models)

1. Turn the Water Heater Ignition switch to the “on” position.
2. If that switch light stays “on” longer than 15 seconds, turn the remote switch to the “off” position and wait 5 minutes.
3. Repeat Step One.
4. (For 6-Gallon Models only): For complete shut-down and also before any servicing:
 - a. Turn the Water Heater Ignition switch to the “off” position.
 - b. Remove the red wire from the left-hand terminal of the ECO switch (ECO to valve).
5. If the water heater fails to operate because of high water temperature, the heater will go into a lockout condition (indicator light “on”). When the water eventually cools, reset the system by turning the switch to the “off” position for at least 30 seconds, then turn the switch back “on.”
6. If a lockout condition persists, contact your authorized dealer.



120-Volt AC Electrical Operation

1. For electrical operation, use the Water Heater switch found on the master control panel in the overhead compartment in the cockpit area above the passenger's-side location.
2. Completely fill the water heater with water and purge the hot-water lines of any trapped air.
3. Turn the Water Heater switch "on." NOTE: Turning the power "on" to the water heater without having previously covered the water-heating element with water may burn out the element and void the warranty.
4. After awhile, check the water heater for proper operation; the water temperature should be approximately 140°F (60°C).
5. If the manual-reset, high-temperature-limit switch should trip the circuit breaker; reset the switch by depressing the reset button—use a pencil or other non-metallic object to depress the reset button. If the high-temperature-limit switch should again trip the circuit breaker, contact an authorized service technician or an authorized dealer.
6. Both the electrical and gas operations of the water heater may be used simultaneously to reduce recovery time of heating water up to desired temperature.

For general maintenance of the water heater or specific information about select steps in operating the water heater, please refer to the owner's manual for this appliance contained in the Owner's Information Package.

Warning

DO NOT STORE any combustible or flammable substances near or adjacent to the water heater. Provide adequate space for ventilation and air circulation.

Water Heater Storage

If the motor home is to be stored during the winter months, the water heater should be drained to prevent damage caused by freezing water contained in the water heater. To drain the water heater, first turn "off" all electrical power, turn "off" the LP gas going to the water heater, then turn "off" the water pump. Open both the hot- and the cold-water faucets to drain the water lines and open the drain on the water heater to drain the entire system.

When re-activating the water heater after the motor home is taken out of storage, make sure that the entire water system, including the water heater, has been filled with water and the lines have been

purged of any entrapped air before re-lighting the water heater. Failure to do so may allow the water-heating element to be turned “on” before such is immersed in water; thereby, causing the premature failure of the heating element and voiding the warranty.


Pressure-Relief Valve

The relief valve for over-pressure and over-temperature conditions is located on the exterior of the water heater. This valve will operate if the water temperature reaches or exceeds 210°F or if the water pressure reaches or exceeds 150 psig. Since the water system in the motor home is a closed system when all water valves are shut, the water-heating cycle can raise the temperature (and, consequently, the pressure) of the water in the water heater; thereby realizing pressure increases approaching 150 psig.

Should this pressure (i.e., 150 psig) be reached, the pressure-relief valve will begin “weeping,” that is, minor dripping or leakage from that valve until the pressure drops below 150 psig, at which time the pressure-relief valve will re-seat itself and restrict the water flow. This is normal operation and should not be a cause for alarm. Do not obstruct or block the pressure-relief valve in any way, as this would keep the valve from functioning normally and protecting the hot water system.

CB Radio System Antenna Connection

The Phaeton comes equipped with an antenna and coaxial-cable connection to enable the owner to install a Citizens Band (CB) radio of choice and operate it conveniently from the Phaeton. The coaxial-cable connection for the radio is found beneath the dashboard on the driver’s side. Accordingly, with an owner-provided CB radio, that radio can be used to communicate with other travelers on the road.

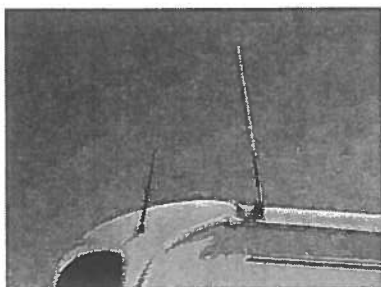


To use the one’s CB system of choice, simply follow the directions furnished with the CB radio. (Note: Channel 11 is considered an emergency channel and monitoring this channel may give one information about road conditions, accidents, and related matters potentially affecting the travels of the motor-home operator).

To talk with someone, simply press the “push-to-talk” switch and speak. To listen to any reply, release the “push-to-talk” switch and listen to the speaker. Remember that communications are “one-way,” not “two-way” simultaneously—one must talk, then allow some listening time for others to talk. Consequently, it’s better to make brief transmissions and allow others to comment; rather than making prolonged speeches and possibly not having anyone answer.

Observe the common courtesies (see the owner’s manual for more details) and acceptable speech. Several states have their Highway Patrols monitor the CB frequencies (check for exact channels for each state of interest) to learn about highway problems and emergencies. Be aware of these throughout one’s travels, in the event that they may be needed.

Rear-View Camera Monitor System

The rear-view monitoring system is provided to aid the driver in backing and parking the motor home.



A camera mounted on the rear of the vehicle feeds a televised view of the rear of the motor home to the monitor located in the front near the driver. If the mode switch is in the “manual” mode, the monitor will be “on” when the ignition switch is turned “on.” If the mode switch is in the “automatic” mode, the monitor will display the picture from the rear-mounted camera only when the transmission is in “reverse” gear. To use this system

effectively, please consult the owner’s manual for this system; this manual is in the Owner’s Information Package.

Washer / Dryer (Optional)

If a washer/dryer unit is installed in the Phaeton, this appliance is essentially operated as one would normally be used in the home environment. This appliance operates on 120-volt AC electricity, so power must be available either from an external power-line connection or from the on-board electrical generator. For specific information regarding the use of the washer or the dryer, consult the owner’s manuals found in the Owner’s Information Package.

Carbon Monoxide Detector

To protect the driver and other occupants of the motor home, the Phaeton is equipped with a carbon monoxide detector. Carbon monoxide (CO) is a colorless, odorless, tasteless gas which, when breathed, bonds to the hemoglobin in the red blood cells and, thus, drastically reduces or blocks the transfer of oxygen from the lungs to the rest of the body. In sufficient concentrations, CO kills by asphyxiation. In lesser amounts, CO makes the victim groggy, lethargic, and unable to think clearly or quickly.



CO is one of the products of combustion for many materials including petroleum-based products (e.g., gasoline, diesel fuel, propane, butane; among others). Since many of the appliances and the engines associated with the motor home produce CO in their normal operations, it is necessary to assure that CO levels do not rise to dangerous levels within the motor home. In sufficiently high concentrations, CO can kill in minutes.

The most susceptible people to CO poisoning are unborn babies, small children, pregnant women, senior citizens, and people with cardiovascular or respiratory problems. Consequently, it is prudent to check the CO monitor regularly for normal operation and to remain aware of the symptoms of CO poisoning which include dizziness, nausea, vomiting, muscular twitching, throbbing in the temples, incoherent thinking and speech, weakness, sleepiness, and intense headaches.

Warning

Carbon monoxide gas—derived from products of combustion of diesel fuel, LP gas, and other petroleum-based products—is a deadly gas which can kill motor-home occupants, if allowed to accumulate in sufficient concentration. Assure that all engine operations are not restricted—tailpipes and exhaust ports should not be blocked or restricted in any way. Additionally, any accumulation of exhaust gases outside or underneath the vehicle should be avoided as such may enter the motor home through windows or vents—be careful how and where the motor home is parked to avoid such conditions. Regularly monitor outside conditions to assure that all exhaust gases can readily be dissipated and not enter the motor home inadvertently.

Warning

Never sleep in a motor home when the engine is running—engine exhaust fumes could enter the motor home and cause disability or death. Regularly check the exhaust system to note any leakage sites and, if found, discontinue use of the motor home until they are repaired by a competent, qualified service technician. Do not attempt repairs on the exhaust system yourself and do not modify (temporarily or permanently) the exhaust system at all.

Should any of these symptoms be experienced in the motor home, one should IMMEDIATELY evacuate the motor home and seek medical help. Shut down the motor home and do not attempt to operate it again until the source(s) of the CO are located and fixed.

The CO detector digital readout will display carbon monoxide readings from 30 to 999 parts per million (PPM) of CO in the ambient atmosphere within the motor home. Under normal operating conditions in the motor home, the display reading should be zero. Besides taking CO readings every 30 seconds, the CO detector also will indicate the status of the battery life with a LCD (liquid-crystal display) icon and the operating condition of the sensor on the digital display by means of a “beeping” sound and a flashing red light.

The motor-home owner should become quite familiar with these digital-display readings and check them regularly and frequently. The display will also indicate possible sensor malfunctions and low-battery-voltage conditions (i.e., flashing red light and “chirping” of alarm). In either of these cases, the motor-home owner should be aware of how to remedy these situations, as described in the CO Detector Alarm manual found in the Owner’s Information Package furnished with the motor home. It

is strongly recommended that the battery in the CO detector be changed every six months to assure that the detector is always in working order.

In the event of an alarm, the following steps should be taken quickly:


1. Operate the Test/Reset button to see if the alarm can be reset (i.e., a false alarm condition). Do this ONLY ONCE; then move to Step 2.
2. Immediately move to a source of fresh air, either outdoors or by an open door or window. Do a "head count" to make sure that all people (and pets!) within the motor home have moved to a source of fresh air, too. Do not re-enter the motor home or move away from the source(s) of fresh air until the emergency responders have arrived, the motor-home interior is sufficiently aired out, and the alarm has reverted to its normal monitoring function (i.e., no alarms).
3. Call the local emergency services (i.e., 911 in most locales) to summon help – don't go back into motor home to make this call, but use a cell phone, if available, or have someone else nearby make this call.
4. Should the CO Detector Alarm again activate within a 24-hour period, repeat Steps 1 through 3 and also call a qualified service technician to investigate the possible sources of CO (e.g., fuel-burning equipment and appliances) to locate, identify, and fix such.

Cabinets & Furniture

Cabinets

Your Phaeton contains cabinetry installed throughout the entire motor home from the driver's area, through the kitchen/dining areas, and back into the bedroom. The cabinetry has been designed and built to provide ample storage space, easily accessible, and conveniently located to support the areas of concern.

Construction of these cabinets incorporates various hardwoods, raised panels, cabinet doors, and supports. Door pulls, handles, and knobs are installed in a style complementing the particular décor of each Phaeton so that an aesthetically-pleasing, as well as fully functional, storage capacity is realized.

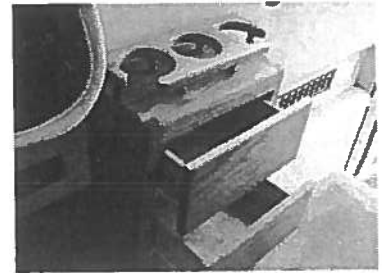

For the many floor plans available in the Phaeton product line, cabinet design has been optimized to provide maximal storage for each and every floor plan available. Accordingly, the Phaeton can readily accommodate the routine materials, supplies, and customer-specific items desired for any travel requirements. Further, these cabinets are designed to contain stored supplies quite securely during travel to minimize or eliminate the possibility of shifting or spilling of cabinet contents during travel. Yet, when the motor home is parked, all stored items are readily available in the cabinets for the convenience of the users.

As the storage requirements will vary somewhat from one floor plan to another, general observations can be made about the Tiffin-supplied cabinetry which may or may not be applicable for your specific Phaeton configuration.

Cabinets are provided in the kitchen/dining area to accommodate the routine cooking utensils and groceries normally desired for travel. Storage space within these cabinets has been so designed to accommodate the typical sizes and configurations of food supplies (e.g., cereal boxes, condiments, canned goods, bottled liquids) normally taken on travel trips.




Based on Tiffin Motorhomes' extensive experience with travel requirements of the seasoned motor-home users and from Tiffin Motorhomes' own research and development in cabinet-design requirements, the resultant cabinets offer the greatest storage capacity possible.

In the bathroom and bedroom, additional cabinets are available for storage of sundries and toiletries specific to these areas.

In the kitchen, a color-coordinated countertop is provided on top of the floor-mounted cabinets. To maintain the appearance of the countertop, clean with a damp cloth. If spotting occurs, clean the countertop with a damp cloth and a mild liquid soap. Should some dried-on residue still persist, let a damp cloth moistened with the liquid cleaner stand directly on top of that residue for 15-30 minutes to

loosen the residue, then clean that spot accordingly. Please note that strong chemicals, solvents, and cleaners (e.g., oven cleaner) may damage the surface; so do not use any products not specifically designed for countertop cleaning.

The countertop may be physically damaged, too, if proper care is not taken. Do not cut anything (e.g., vegetables, fruits) directly on the countertop; rather, use a cutting board on top of the countertop to provide necessary protection to the countertop. Excessive heat may also damage the countertop; therefore, any pots or pans taken directly from the range or oven should not be placed directly on the countertop; rather, use trivets or some other form of fireproof heat insulators to hold very hot pots or pans on the countertop.

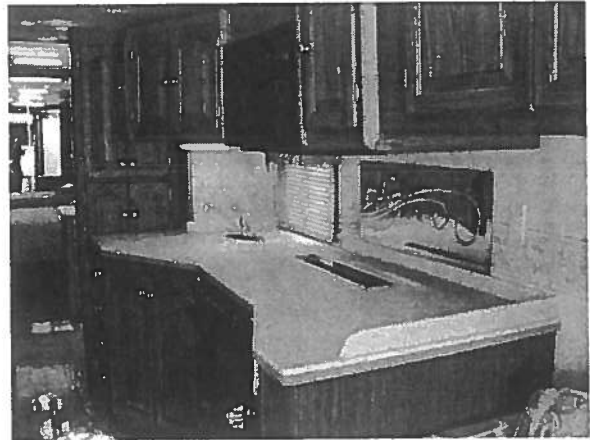

All drawers are equipped with metal slides to provide additional load-bearing strength for the drawers and to permit effortless opening and closing of those drawers, even when they are fully loaded. These metal guides have a slight “locking” action, when closed. To open those drawers, slightly lift up on the drawer handle and then pull the drawer open. To close, push the drawer closed until it “clicks” back into place (i.e., the locking action is engaged).

As this cabinetry is typically of furniture-grade quality, any commercial furniture polish or cleaner can be used. Do not try to soak these wooden surfaces with any water or any other liquid; be sure to wipe up spills or residues of any fluids that contact these surfaces to preclude any staining or discoloration of the cabinet surfaces.

Furniture


Kitchen, Dining, & Living Room Areas

On all the various floor plans of the Phaeton, a built-in dinette booth is standard; a free-standing table is optional. This dinette provides additional storage under the seat area of the booth, in addition to providing additional sleeping facilities. The sleeping area is realized by lowering the dinette-table top and re-arranging the seating cushions. Specific directions for converting the booth dinette into a bed are as follows:



1. Remove the seat cushions.
2. Remove the wooden fill blocks.
3. Fold the table leg upwards while slightly lifting the table, then

4. Allow the table to swing down and rest between the two booth seats; thus, forming the bed.
5. Re-install the seat cushions and back rests to make up the mattress for the bed.

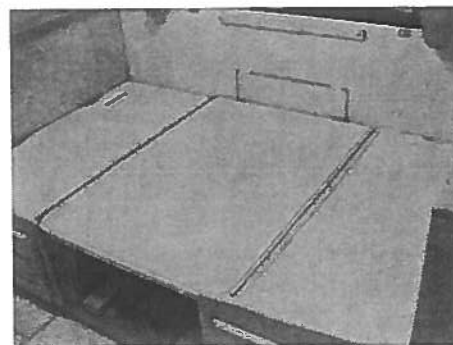

The living room contains a standard sofa which converts into a bed, as required. The sofa is custom coordinated with the décor of the motor home. To convert the sofa into a bed, follow these directions:

1. Remove the accent pillows.
2. Under a seat cushion locate the “black tab” and slide the tab to the left or the right and then pull upwards on the seat portion of the sofa—this will cause the sofa seat to open, extend, and convert into a bed.

There may also be a swivel rocker/recliner with adjustable headrest, also coordinated with the décor of the motor home.

The driver’s seat is an electric-powered, six-way power seat (i.e., movement: up, down, forward tilt, reverse tilt) having swivel features (and recline features for the passenger seat only). When the motor home is parked, the driver’s seat can be swiveled to face into the living room.



To swivel this chair, first extend the slide-out room (see Chapter 8 for additional detail). Then move the chair backwards as far as possible to gain clearance from the steering wheel. Now the chair can be swiveled without interference. The control switch for the driver’s chair is located on the left-hand side in front of the power base controls.

In a comparable manner, the passenger’s seat is also an electric-powered, six-way seat having essentially the same controls as that of the driver’s seat and it is operated accordingly.

Bedroom Area

If a décor-coordinated, quilted bedspread with accessorized pillow shams and accent pillow(s) are included with the bedroom suite, it is recommended that the bedspread be dry-cleaned only to preserve the quality and integrity of the bedspread for the longest time possible.

Treatment of the bedspread with any of the stain-resistant sprays (e.g., Scotch-Guard or its equivalent) will also make the bedspread more resistant to the possibilities of stains and fabric damage.


If maintained properly, the bedroom soft-goods accessories will provide years of dependable service and maintain the desired décor established by the motor-home owner.



Structural Features

Chassis Features

The chassis of your Tiffin Motorhomes Phaeton was built and is warranted by Freightliner, the chassis manufacturer. The operating instructions for that chassis are included in the Chassis Owner's Manual which is provided with your Phaeton and is a part of the Owner's Information Package furnished to you by your Tiffin Motorhomes Dealership. Before you begin using your Phaeton, please read and follow all recommendations for the proper care, operation, and maintenance of the chassis—this will assure you of pleasant, trouble-free use of vehicle. Should you have any questions about the chassis, however, you should contact your chassis manufacturer as noted in the literature described earlier.

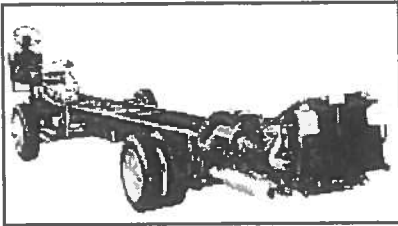

TYPICAL CHASSIS ITEMS COVERED UNDER WARRANTY BY THE CHASSIS MANUFACTURER
Steering Wheel and System
Instrument Panel
Engine and Transmission
Chassis Frame
Axles
Fuel Tank
Suspension and Springs (Front-End Alignment is not covered)
Tires and Wheels and Brakes
Exhaust System
Leaf Springs

Alignment

The Phaeton motor home you have purchased has been aligned at the factory prior to shipment to you. During the first 10,000 miles of operation of your Phaeton, the chassis will have a tendency to "settle" and readjust itself in response to the loading of your vehicle. Although it normally is not necessary to re-align the Phaeton before the first 10,000 miles of use; it is, nonetheless, recommended that you have the Phaeton alignment checked after the first loading of the vehicle. However, if you feel that you have noted some discrepancy or anomaly in steering operation, please contact your chassis manufacturer or call Tiffin Customer Service at (256) 356-8661 to address your concerns. Tiffin Motorhomes is always ready to assist you with the unique aspects of your specific Phaeton and has qualified experts readily available to provide you this assistance.

Electrical Features

General Information


There are two electrical systems in your Phaeton motor home—these are the 12-volt DC (VDC) system and the 120-volt AC (VAC) system. Most standard appliances require the 120-VAC system, while the majority of the lighting systems used in the Phaeton use the 12-VDC electrical system. The electrical power for the 12 VDC system is supplied by the batteries of the Phaeton; those batteries are, in turn, charged by a power converter. The electrical power for the 120 VAC is supplied by the power cord when the Phaeton is connected to an external power source or when the on-board electrical generator is in operation. If installed, the optional inverter can also supply 120 VAC electrical power (to limited outlets and limited appliances)—the inverter transforms the 12 VDC electrical power from the batteries into the 120 VAC electrical power for the basic appliances.

Caution

Failure to turn off the 120 VAC appliances when starting or stopping the generator may damage the transfer switch and/or electrical appliances.


To connect the Phaeton to an external source of 120 VAC electrical power, it is first recommended that all of the circuit breakers are in the “off” position—this is done to prevent any power surge upon connecting the motor home to the external power source. Then unwind the power cord from the electrical compartment located in the compartment behind the driver’s-side rear tires. The standard, flexible, power cord supplied with the Phaeton is designed to handle up to 50 amperes. Make sure that the pins in the male end of the plug are oriented correctly so that they match the power cable, and that they are in good condition (i.e., aren’t bent or damaged). If there is a circuit breaker switch at the “plug” end of the power cord, that breaker should be turned “off” before making the connection. Insert the plug into the mating outlet and then turn the circuit breaker “on.” Close and lock the electrical compartment door to protect the contents and to keep them clean and dry. Close the cover on the power box, if so equipped, to avoid an unintentional disconnection and to keep the contents clean and dry. Then switch the main breaker to the “on” position. When properly connected, the 120 VAC system provides power to all the 120 VAC circuits and outlets when the main breaker is turned “on.”

Circuit-Breaker Boxes

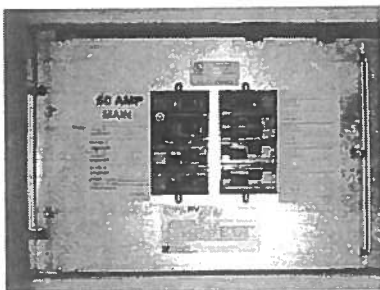

For the Phaeton, the 120 VAC and 12 VDC breaker boxes are typically located beneath the refrigerator or in the bedroom [*if inside the vehicle*] or in the storage box [*if outside the vehicle*]. The circuit breakers and associated fuses are installed to protect the electrical system of the Phaeton from any overloads. Do not attempt to change the electrical circuitry or to add appliances yourself. Please consult an authorized Tiffin Motorhomes Dealership or Tiffin Motorhomes, Incorporated in


Red Bay, AL to determine whether any changes you desire are appropriate and acceptable. Tiffin Motorhomes' qualified staff of electricians can readily determine whether any changes sought (e.g., CB radio, amateur radio, satellite television receiver, personal computer system, and the like) are possible or not and can advise you on how best to realize these enhancements. Please note that the 12 VDC fuses and breakers located in the storage compartment on the rear, passenger's side of the RV are protected by a plexiglass shield to prevent accidental short-circuiting of the 12 VDC power system.




To protect this 12 VDC system further, **DO NOT STORE** anything in this compartment (e.g., toolbox) which may jostle around, break through the shield, and short out the 12 VDC system—if this system were short-circuited, extensive damage and/or fire could result.

Auxiliary Start Switch

The auxiliary start switch is located on the driver's-side console box. This switch briefly connects the

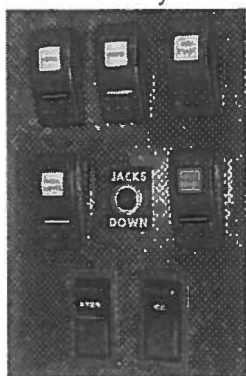

Phaeton coach batteries to the chassis batteries—this allows the chassis batteries to “borrow” power from the coach batteries to assist in starting the engine. If the chassis batteries cannot themselves start the engine in the “normal” mode, hold down the battery-boost switch and re-try starting the engine.

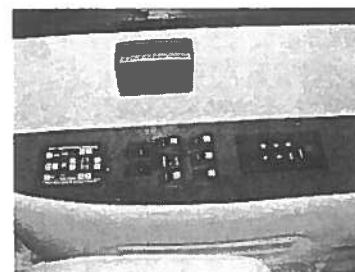

By using the battery-boost switch while trying to start the Phaeton engine, a jump-start situation is realized between the coach and chassis batteries. If the battery-boost switch is required to start the engine on a regular basis, ask your Tiffin Motorhomes Dealership to check the chassis batteries and the associated charging system.

Battery Inspection and Care

The 12-VDC electrical-power system consists of four 6-VDC batteries wired in a series-parallel combination to provide a final, 12 VDC system providing up to 450 Ampere-hours (A-hr) of service.

As the batteries contain a significant amount of electrical energy, they must be handled with due diligence and care. Some of the routine precautions include:

Caution

Disconnect the 120 VAC electrical power cord and the negative terminal from the coach batteries BEFORE working on the Phaeton electrical system.

Warning

Remove rings, metal watchbands, and any other metal jewelry before working around batteries. If any metallic object (tool, jewelry, etc.) contacts the positive battery terminal or any connection made to that terminal AND also contacts the negative terminal or any of its connections, a SEVERE ELECTRICAL SHORT will occur which could result in an explosion, fire, and/or personal injury. Lead-acid batteries contain diluted sulfuric acid which can be dangerous; avoid direct contact with any battery fluids. Wear eye protection.


Caution

If the Phaeton ever requires any welding operations on the frame, first disconnect the chassis batteries. Failure to do so will destroy all of the chassis computer system.

When batteries are not used for extended periods of time, they will gradually lose their electrical charge. Therefore, it is necessary periodically to recharge the batteries to increase the operational lives of the batteries. It is also necessary to check the external condition of the batteries on a regular basis. Look for cracks in the battery case and cover. Check the vent plugs and replace them if they are cracked or broken. Keep the battery clean.

Since accumulations of dirt and acid residue around the battery terminals may provide an electrical path for discharging the battery, the area around the terminals should be cleaned periodically. One can use an old toothbrush and a sparse amount of a diluted solution of baking soda (sodium bicarbonate) and water (distilled or de-ionized, preferred; tap water, acceptable) to clean and neutralize any acidic build-up around the battery terminals. If this is done and there is any foaming on the top of the battery, this indicates that acidic residues are being neutralized.

Rinse the cleaned areas thoroughly with distilled or de-ionized water (tap water is okay,

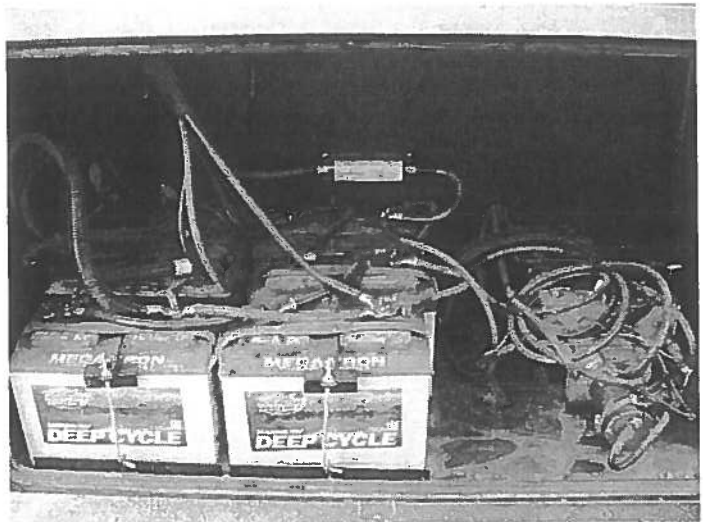

too). Avoid getting the baking-soda solution into the battery fill plugs to each battery cell; this would drastically reduce the effectiveness of the battery (by neutralizing the sulfuric acid in the battery cells) or, worse, “kill” the battery.

Dry the battery cables and terminals to prevent corrosion; to protect those terminals further, use a plastic ignition spray on the terminals. Do not use grease on the terminals, especially on the metal-to-metal connections, as grease may act as an insulator and keep the battery electrical power from entering the cables.


If the batteries are not going to be used for an extended period of time, they should be removed from the Phaeton and stored in a warm, dry place. IT IS STRONGLY RECOMMENDED that this service be performed by a qualified service technician, as the process is usually too complicated for the average owner to perform. For those who may wish to perform this services themselves, the following procedure is described: Mark the battery cables (“+” [plus] sign or “red” for the positive cable; “-” [minus] sign or “black” for the negative cable) so that they can be properly re-connected again later. These batteries would require periodic re-charging to maintain their full charge.

Additionally, the batteries will, over time, lose some of the water used with the sulfuric acid in the batteries. Following manufacturer’s recommendations as found in the Owner’s Information Package, periodically check the fluid levels in all the cells of the batteries (be sure to use safety eyewear during this process) and fill those that are low with water (distilled or de-ionized water is preferred; tap water is okay). Don’t overfill the cells; follow the filling directions exactly. This battery check-up should be done on a regular basis to realize the fullest service possible from the batteries over the longest time possible.

If the Phaeton is to be stored for an extended period of time, the 12 VDC battery system should be disconnected—this will prevent unnecessary drain and corrosion of the batteries and their terminals.

Battery Disconnect Panel

The battery disconnect panel is located near the interior step. There is a toggle switch on the lower left-hand side of the panel which can disconnect the battery when the vehicle is to be stored for any appreciable time. Pressing this switch downwards disconnects the coach batteries only, not the chassis batteries. This feature is designed to prevent the coach batteries from being drained during storage. This switch also disconnects all the 12 VDC circuitry from the batteries; thus removing the total electrical load from those batteries, with the exception of the LP detector.

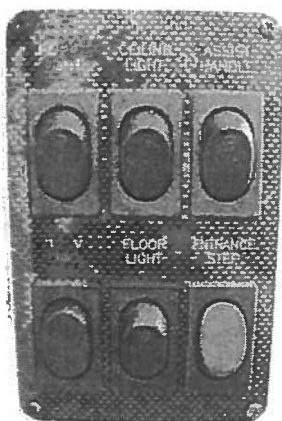


When the Phaeton is removed from storage, press the switch upwards to re-connect the 12 VDC circuitry to the coach batteries again and the 12 VDC systems are now re-activated. The Freightliner chassis of the Phaeton may be equipped with a second disconnect switch strictly for the chassis batteries. If your Phaeton is so equipped, this “master kill switch” may be located in the rear engine compartment.

This switch disconnects all power to the coach so that the coach cannot be started. This switch is used to prevent the ignition circuitry from being accidentally turned on when the engine is being serviced.

120-Volt AC (VAC) Receptacles


Your Phaeton Motor Home is equipped with several 120 VAC receptacles located throughout the interior of the motor home. These 120 VAC receptacles are of the “three-prong” variety; the third prong being a grounding pin which provides adequate grounding to protect one from any electrical shock. For these receptacles to work properly; do not use an adapter, cheater, or extension cord which defeats the function of the grounding pin. For the same reason, never remove or bend away the ground prong or pin from any three-prong AC plug so that it would fit a two-prong AC receptacle (i.e., an ungrounded AC receptacle).

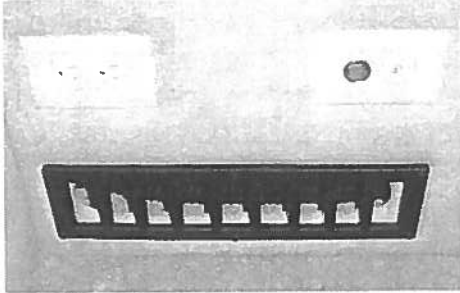

Never operate the Phaeton if there is an electrical short present, as an electrical short may deliver an electrical shock to anyone coming in contact with the exterior of the unit. If you should feel even the slightest of electrical shock, immediately disconnect the unit from the 120 VAC power source and locate the electrical fault (i.e., typically, it is a break in the grounding circuit). Do not reconnect the 120 VAC power until after that electrical fault is fixed—the grounding circuit must be continuous from the frame to the distribution panel, to the power cord, and to the earth ground so that electrical-shock protection is realized.

12-Volt DC (VDC) Receptacles

Your Phaeton Motor Home may be equipped with a 12 VDC receptacle conveniently located on the dashboard or bulkhead (i.e., the “black” connector plate in the figure). This 12 VDC receptacle can be used for providing power to various items, such as cellular phones or personal computers or portable communications equipment. This receptacle is usually found on the bulkhead in front of the passenger’s seat so that it is conveniently available to be used by the personnel in the cockpit area



Ground-Fault-Circuit-Interrupt (GFCI) Receptacles


In the kitchen and bath areas, there are 120 VAC GFCI receptacles which provide greater protection against inadvertent electrical shocks. These specialized GFCI receptacles provide both overload and short-circuit protection for the user. The electrical receptacles located in the slide-out are wired through the kitchen GFCI. The exterior receptacles are wired through the bathroom GFCI. Consequently, if an appliance plugged into a slide-out or exterior receptacle is not working, check for a tripped GFCI in the kitchen or bathroom. In addition, these receptacles protect the user from ground faults between an

electrically “hot” wire and ground. The GFCI will not reduce the shock hazard if the short is between a neutral and “hot” wire, or two “hot-load” wires.

The GFCI should be tested at least once a month. The 120 VAC electrical system must be “on” for the GFCI to be tested. To test the GFCI the reset button needs to be pushed in fully before starting the test. Push the test button; this will cause the reset button to pop out which means that the protected circuits have been disconnected. Push the reset button back in until a “click” is heard—this will re-activate the protected circuit. If the GFCI is working properly, the reset button will remain in the “in” position.


ICC [Interstate Commerce Commission] Switch

On the driver’s side console, one will notice a switch labeled “ICC.” This switch is a momentary pushbutton switch—it is active only when the switch is being pressed. This switch enables the driver to communicate with other traffic by flashing the clearance and sidelights of the Phaeton. If the lights are presently “on,” the switch will momentarily turn them “off.” If the lights are “off,” the switch will momentarily turn them “on.”




Converter

As a standard feature on the Phaeton, a converter is provided to convert 120 VAC power (externally connected and/or from the on-board generator) to a 12 VDC system (“house” batteries) which provides power to various lighting fixtures and items throughout the motor home and to select 12 VDC power sockets (e.g., dashboard; cockpit) for power connections for various items (e.g., portable CB systems, MP3 players, scanners). The converter is conveniently situated in one of the external storage lockers underneath the Phaeton. Do not store anything else in this locker to avoid any accidental electrical short-circuits. Regularly examine these connections to assure that they are tight and corrosion-free.



Inverter/Converter (Optional)


When the 120 VAC power is not available, either from the power cord or the generator, the optional inverter/converter may be used (if such is installed in the Phaeton). The control panel for the inverter/converter is located above or near the entrance door. When the inverter/converter is turned “on,” it transforms the 12 VDC power to 120 VAC power for the operation of lights, appliances, televisions, and related items. The 120 VAC power which is generated by the inverter/converter is routed to the electrical sub-panel located next to the main breaker box under the refrigerator [if

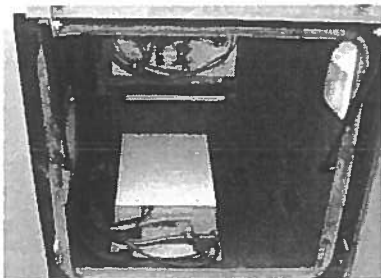

inside the vehicle] or in the storage compartment [if outside the vehicle].


For proper operation of the inverter, one should initially set the inverter functions, as follows:

- **Set-Up Mode** – Enter the Set-Up Mode by pressing and holding the “Setup” pushbutton switch for 5 seconds until the LED (light-emitting diode) blinks. For the 458 Series, the Freedom Remote is connected if at least one DC Volts LED is “on.” After 5 seconds of no activity, the Freedom Remote automatically exits from the Set-Up Mode. In the following, additional steps, the most critical set-up settings are the “Battery Type” and “Battery Capacity,” so use care to adjust these properly.

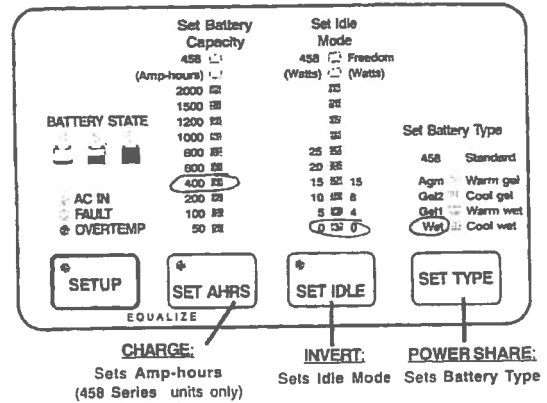

- **Set AHRS [Battery Capacity (Ampere-hours)]** – For the Charge function, set the Ampere-hours rating of the battery bank by pressing the “Set AHRS” pushbutton switch to 400 Ampere-hours.
- **Set Idle Mode [Idle Load (Watts)]** – For the Invert function, select the idle setting by pressing the “Set Idle” pushbutton switch. If present inverter loads are less than the selected value, the inverter will remain in the Idle Mode. Idle Mode operation prevents unnecessary power drain on the battery system when no AC loads are in use. When an AC load is turned “on,” and the load wattage exceeds the idle value, the unit begins full-power inverting. When the appliance is turned “off,” the inverter then returns automatically to the Idle Mode. A setting of “zero” disables the Idle Mode. Set the Idle Mode to “zero.”
- **Set Type [Power Share (Battery Type)]** – To select the battery type, push the “Set Type” pushbutton switch to select the “wet” option.


The breakers in the sub-panel are labeled to explain where the 120 VAC power is routed. Generally, the inverter/converter supplies power to the microwave, kitchen, bath, and bedroom receptacles and other, select receptacles. The inverter/converter is equipped with an automatic transfer switch which allows automatic switching from inverter to converter.



When the Phaeton is connected to an external power source or the generator is being used to supply power, the converter will automatically switch “on” to charge the 12 VDC batteries. For more detailed information, consult the manufacturer owner’s manual located in the Owner’s Information Package.

Electrical Generator

The electrical generator is located in a compartment in front of the motor home between the chassis rails on pull-out slides. The generator is mounted on slides for easy access; however, the slides must be unlocked before free movement is possible. There is a “pull” cable in the box in front of the driver’s-side front tire—pulling this cable will release the slide lock for the generator.



Prior to starting or stopping the generator, make sure that all the 120 VAC appliances are turned “off.” After the generator has been started, wait until the transfer switch has connected before turning “on” any of the appliances.



The generator can be started from either the remote-start switch located on the dash or directly at the generator itself. The hour meter installed on the generator records the number of hours of operation of the generator motor—this elapsed time is needed for observing necessary maintenance schedules on the generator.

Caution

Failure to turn “off” the 120 VAC appliances when starting or stopping the generator may damage the transfer switch and/or electrical appliances.

For more detailed operating instructions and to determine necessary preventive-maintenance schedules and procedures, review the manufacturer owner’s manual.

Automatic Transfer Switch

Your Phaeton is equipped with an automatic transfer switch. When the generator is turned “on,” this switch automatically transfers from external power to generator power. There will be a slight delay between the start of the generator and the electrical connection being made—this delay allows the generator to reach normal operating speed without needing to supply a required load. When the Phaeton is plugged into an external source, a “click” will be heard in the transfer switch box—this is a normal function and merely indicates that the unit is changing over from an external power source to the generator.

Reset-able Circuit Breakers

The reset-able circuit breakers are located within 18 inches of the source of power; that is, the converter and the battery. When the circuit breakers are shut down or electrically tripped, they must be manually reset. To find the circuit breakers, follow the line from the battery or converter approximately 18 inches—this may lead to a junction box or to a cabinet inside the Phaeton or to a similar location. As needed, manually reset the circuit breaker or breakers as shown in the accompanying figure. Be careful when working around these connections as an accidental electrical short to ground (i.e., momentarily connecting the “positive” or “hot” terminal to any part of the chassis) can be hazardous and harmful.

Fuse Blocks

Some of the electrical circuitry within the motor home is protected by various fusing systems. Some of these fuse blocks are immediately accessible from the driver’s side underneath the dashboard. Underneath the dashboard is an enclosure which contains fuse blocks. These fuse blocks protect some of the major electrical systems of immediate concern to the driver such as the power seats (driver’s and passenger’s), spot light, mirrors, camera, radio, and various extra fused positions. Should there be any electrical failure of these components or systems, the first troubleshooting procedure should be to check the fuses and have available replacements to replace any blown fuses, as may be warranted.




Also the Phaeton contains a computerized diagnostic center for the engine of the motor home. This center permits a computer to be connected to the on-board diagnostic center monitoring many of the operating functions and parameters of the engine so that the current operating status of the engine can be determined and any anomalies or problems may be noted. This diagnostic tool enables the motor home owner to maintain an updated status of the engine so that the overall reliability of the motor home can be maintained.

Additionally, there is an under-dash fuse block which contains additional fusing of many of the important circuits pertaining to the chassis electrical systems. Again, it would be prudent to maintain a select inventory of replacement fuses to replace any blown fuses that may be detected.

As an aid to extracting and/or installing fuses in the fuse blocks, one may wish to buy an inexpensive fuse puller at any electronics or hardware store. This tool makes the installation or removal of fuses much easier and prevents inadvertent damage to nearby fuses or the fuse block itself. Whenever a fuse has been “blown” and is to be extracted and replaced, it is good practice to examine the wiring going to that particular fuse to see if there is any noticeable degradation (e.g., wiring insulation nicked, missing, or melted) which may indicate damage beyond the fusing proper.





Slide-Out Features

SLIDE-OUT OVERVIEW

Warning


BEFORE ACTIVATING THE SLIDE-OUT FEATURES, please read the slide-out room instruction manual first. Additionally, the motor home must be parked and the leveling jacks must be used to level the motor home **PRIOR** to activating the slide-out features and the ignition switch must be in the "off" position.

General Considerations

Please Note

The Slide-Out Room requires semi-annual inspection (i.e., every six months) to assure that the slide-out mechanism is properly aligned and functioning correctly. Please make sure that this inspection is performed every six months to correct any possible misalignments.

- The slide-out-room feature is actuated by means of a readily-accessible, rocker switch. The rocker switch must be manually held down in the desired position (i.e., either "in" or "out") to activate the desired action of the slide-out room and continue to be held down until the desired action is concluded. Releasing the rocker switch before the slide-out is fully extended or retracted will stop the slide-out at some intermediate position. **NOTE: The slide-out switch will only operate when the ignition switch is in the "off" position**—there is an interlock which keeps the slide-out mechanism from operating when the ignition is "on."

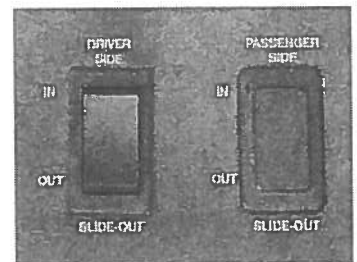

Operating Precautions


Warning

Before attempting to extend the slide-out room, check outside and make sure that there is at least a five-foot clearance around the area where the slide-out room will be extended.

Before the slide-out-room mechanism is to be used, make sure that the motor home is parked, the leveling process has been properly completed. Verify that no obstacles (e.g., branches, trees, telephone poles, power/water hookups, trash bins, and the like) are within a five-foot space envelope of that slide-out room to preclude damaging the slide-out room when it is finally deployed.

Extending the Slide-Out Room

1. All windows in the slide-out room must be closed and secured before the slide-out room is to be extended or retracted. Also any loose materials or possible obstructions should be removed from the immediate, slide-out room area. Make sure that the motor home has been leveled, that the battery is fully charged and connected to the electrical system, and that the ignition switch is “off” before attempting to use the slide-out features.
2. Verify that there are no obstructions outside which may interfere with the operation of the slide-out room.
3. Prior to moving the slide-out room in either direction, make sure that the driver’s chair is moved forward into the driving area as far as possible and is locked into position.
4. Push the “out” section of the rocker switch; allow the slide-out room to go to its fully-extended position.
5. Release the rocker switch (this locks the room into position).

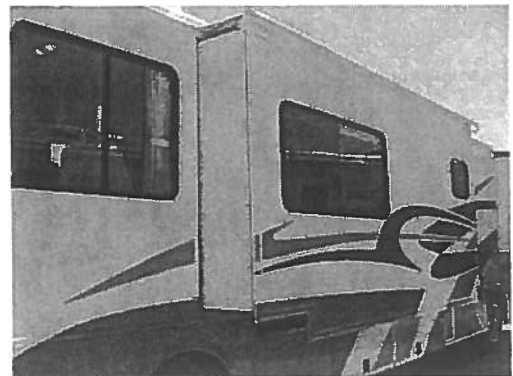

Retracting the Slide-Out Room

1. Before attempting to move the motor home, the slide-out room must be fully retracted.
2. Verify that the 12 VDC system is fully charged and connected to the electrical system.
3. Push the “in” section of the rocker switch; allow the slide-out room to go to its fully-retracted position.
4. Release the rocker switch (this locks the room into position).

Manual Operation: Slide-Out Room

Your Power Gear slide-out system is equipped with a manual override that allows one to extend or retract the room in the event of a loss of power.

Please Note

If the slide-out room doesn't move when the rocker switch is depressed, check the following:




Make sure the ignition system is turned "off."

Make sure the battery is fully charged and connected.

Make sure the slide-out breakers haven't been "tripped." These are located in the storage box with the inverter or converter.

After the previous items have been checked and verified and the slide-out room still does not move when the rocker switch is pressed, follow these simple steps to override the slide-out room manually.

1. Turn "off" the ignition switch.
2. Locate the slide-out electrical controller (refer to your Tiffin Motorhomes dealer or the Tiffin Motorhomes factory for its location). There are two versions of the controller. For version 1, unplug the six-pin wiring harness to the controller. For version 2, remove one of the motor leads (either the motor I or the motor II lead from the controller).
3. Locate the slide-out motor; it will be mounted to one side of the slide-out rails. NOTE: If the motor home has an underbelly or a cover over the motor, these parts must be removed to access the motor.
4. Rotate the brake lever, on the backside of the motor, counter-clockwise (CCW) (looking from the rear of the motor) about 1/8 of a turn to the released position. This action will release the brake that holds the room in place.
5. Locate the manual override for the slide-out system.
6. The room is now free to move. Using a 3/4" wrench or socket, crank the room either "in" or "out" completely (depending on your needs). NOTE: If the slide-out system is supplied with a gearbox

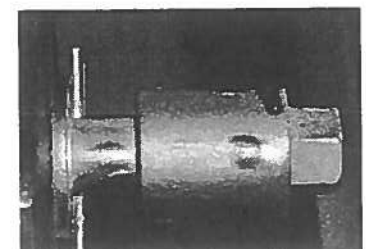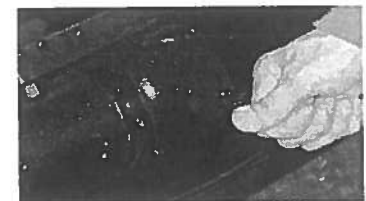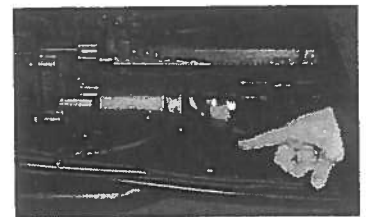

override (optional), use the crank handle to move the room.

7. When the room is fully “in” or “out,” apply pressure to the wrench or ratchet and return the brake lever to its engaged position—this will assure that the room is locked into a secured position.
8. Take the unit to an authorized dealer for service.

Exterior Features

Towing Hitch

On the rear of the Phaeton can be found a Class 3, 10,000-pound towing hitch capable of handling a tongue weight of 1,000 pounds. This hitch is installed for towing a passenger car to be used when the vehicle is parked. The wire connector installed with this hitch is a standard, four-pin connector. For more information on the connector, please see Chapter 7 of this Owner's Manual.

Exterior Sides

The sides of your Phaeton are constructed of gel-coated fiberglass. To add to this feature, the end caps are also gel-coated fiberglass. To clean these fiberglass surfaces, only use warm water and a mild cleanser;



gently wash with soft cloths. Use of stiff bristle brushes or other harsh abrasives may cause scratches in the fiberglass surfaces. Please note: Tiffin Motorhomes is NOT responsible for the weathering/oxidation of gel-coated surfaces.


Lighted storage compartments are located on the exterior sides of your Phaeton. These external compartments provide ample, additional space for your belongings while you are traveling. When stowing materials in these storage compartments, try to “balance” the resultant weight load from front to rear and from side to side—this will keep the center of gravity of the motor home essentially unchanged and should not adversely affect the handling characteristics of the motor home when it is in motion.

Security Lights

On the Phaeton, exterior security lights are standard features. A light is installed on the passenger side of the coach to help light that side of the Phaeton for added protection. This light can serve as a “porch light” when the motor home is parked and the awning is deployed so that various activities (e.g., sitting outside, grilling, visiting) at dusk and later can be enjoyed by the motor-home owners and their guests.



Roof & Ladder

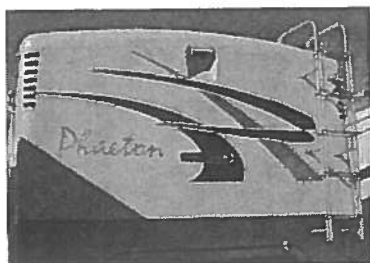

The Phaeton is manufactured with a fiberglass roof. Proper care and routine maintenance of your roof will assure many years of trouble-free performance. Please see Chapter 14 for details on recommended cleaning instructions. On the Phaeton, a roof ladder may also be included as an additional feature. The ladder is typically used to permit easy access to the roof for routine maintenance and periodic inspections. The ladder is hinged so that its lower half can be folded up onto the upper half when

the motor home is in transit. When folding up that ladder and securing it, be sure that the ball-lock pin is securely fastened through the locking device to secure the ladder.

Hydraulic Leveling Jacks

Warning

If the vehicle is equipped with a slide-out, DO NOT OPERATE any room extension until the leveling and stabilizing procedure has been properly completed. DO NOT RETRACT the leveling system until the slide-out room has been retracted. NEVER operate the leveling system when the slide-out is extended.

The Phaeton is equipped with hydraulic-leveling jacks. These jacks work in pairs: Front, right side, left side, and rear. Before extending these jacks, the engine must be “off,” the ignition switch must be in the “ACC” position, and the transmission must be in “park.” The parking brake needs to be set and the tires blocked securely; then the leveling jacks can be activated.

Caution


DO NOT LIFT the wheels of the motor home off the ground when leveling—if done, the motor home can roll forwards or backwards when supported only by the leveling jacks. Never use the jacks to lift the motor home off the ground to change the tires or perform any under-chassis maintenance—these jacks are not meant for this type of service and this misuse would be very dangerous to the operator.

HWH Leveling Control Panel

The HWH Computerized Leveling system requires minimal effort from the motor-home user. For leveling of the motor home, perform the following steps:

Manual Leveling (Standard):

1. Turn the ignition switch to the “acc” or “on” position. The engine must be “off” to level the coach. The transmission shift must be in position for parking. The park brake must be set either manually or automatically. If the “not in

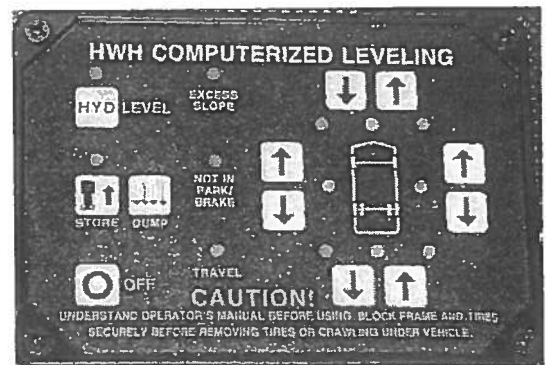

park/brake” light is “on,” check or re-check the shift and brake position.

2. Press the “hyd” button. The “hydraulic operation” indicator light will turn “on” with a steady glow.
3. On the right-hand portion of the HWH Leveling Control touch panel, note the outline of the motor home and the various “raise” (i.e., “up” arrow) and “lower” (i.e., “down” arrow) touch buttons.
4. Press the respective “raise” (“up” arrow) button to raise the respective side or end of the motor home. A yellow light to the front, side, or rear of the motor-home outline indicates that that side or end is low. The “lower” (“down” arrow) buttons will lower the motor home.


NOTE: The hydraulic jacks will always work in pairs: Front, right side, left side, or rear.

Important


The leveling system should be cycled once a month or whenever the motor home is used to keep the leveling system in good operating condition.

Electric Steps

The Phaeton is equipped with electric, double-entrance, door steps. As such, the switch to operate these steps is located in the passenger console box. When the power switch for the steps is in the “on” position, simply open the door and the steps will automatically extend. Detailed operation for the electrical, double-entrance, door steps is as follows:

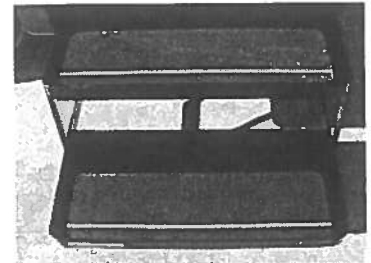

1. Turn the step power switch “on.”
2. Close the door. The step should retract and lock into the UP position.
3. Open the door. The step should extend and lock into the DOWN position.
4. Turn the step power switch “off.” The step should remain in an extended position when the door is closed. Turning “off” the power with the step retracted will hold the step in a retracted position, as well.

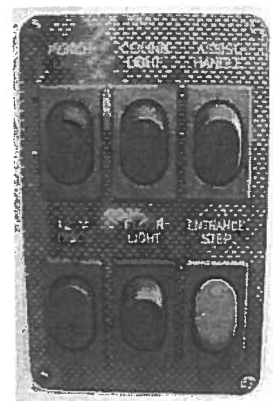

5. With the step extended, turn the step power switch “off” and close the entrance door. Turn the vehicle ignition switch “on.” The ignition override system will go into effect and the step will automatically retract.

Caution

If the motor home is driven with the step in the extended position, there is the possibility of causing major damage to both the step and the motor home.

6. With the step switch in the “on” position, turn the vehicle ignition switch “off” and open the door. The step will extend and lock in the DOWN position.

Caution

If the door is opened and closed without allowing the step to extend fully and lock in the “DOWN” position, the step will retract and lock in the “UP” position. When the door is re-opened, the step will not extend. The power switch must be turned “on” for the step to extend.

7. This feature is only operative the first time the door is opened after the vehicle ignition switch is turned “off.” When the ignition switch is “on,” the step will always activate with the door movement, regardless of the position of the step power switch.

Caution

Always be sure to “look before you leap”! When opening the entrance door from the inside, be sure that the step has fully deployed before trying to step outside to avoid falling and possible injury.



When the electric steps are fully retracted and the motor home is being made ready for travel, be sure to deploy the cover over the stairwell (use either the switch on the driver’s console or the switch on the passenger’s side) to protect any occupants of the cabin from any accidental stepping into the open stair well. Activating either switch will cause the stairwell cover to be pneumatically



deployed from a recess beneath the floor in front of the passenger's seat. This precaution will provide a safe traveling environment for anyone using the passenger's seat during travel.

Mirrors

This motor home is equipped with convex, remote-controlled, exterior, rear-view mirrors—black are standard; chrome are optional. Always adjust the mirrors for maximum rear visibility prior to driving. If another driver is to drive, be sure the mirrors are re-adjusted to accommodate the second driver.



These standard, black mirrors are adjusted by using the multi-directional switch located on the dashboard. Select the mirror to be adjusted by pointing the arrow in the direction of that mirror. Move the control in the direction of movement desired to obtain the best view for that mirror. The adjustment control moves the top half of both mirrors. The bottom half of each mirror is convex and is adjusted manually.

These mirrors also contain heating elements to defog or de-ice the mirror glass during cold weather operation. The “on/off” switch for this feature is located by the adjustment control. Further adjustment of the mirror may be necessary at the swivel portion of the mirror arm.

Important

Objects viewed in convex mirrors appear smaller and farther away than they actually are.



Interior Features

Bedsread

As a furnished part of the bedroom suite, a bedspread with matching pillow accessories is included with the Phaeton motor home. For the bedspread and pillow shams, cleaning instructions are “for dry-cleaning only.” As the bedspread was made with materials treated for stain resistance; dry-cleaning will prolong the life of these materials. The curtains in the bedroom are color-coordinated with the bedspread and accessories to provide a pleasing décor for the bedroom area.



Flooring

The living room and bedroom floor areas are carpeted with filament-nylon carpeting treated with Scotch-guard, a stain-resistant coating. In the Owner's Information Package, there is additional literature from the manufacturer concerning the specifics of caring for the carpeting which, if followed, will prolong the appearance and life of the carpeting. Please become familiar with the recommended care and cleaning of the carpeting to assure its prolonged life.



Vinyl flooring is standard in the kitchen and bathroom areas of the motor home. For routine cleaning, sweeping or vacuuming the floor would be sufficient. If more thorough cleaning is warranted, the flooring can be cleaned with a damp mop and water. For more stubborn stains, a mixture of soap-free household cleaner (e.g., vinegar, ammonia, or comparable products) and water can be used to advantage. One should not unduly saturate the floor surfaces with water, as this could damage the flooring substrate. Do not use any abrasives (cleansers, scouring pads; and the like) as they can scratch or mar the vinyl flooring surfaces and may cause damage to the vinyl


flooring. If ceramic tile is chosen as an option, it may be cleaned more vigorously than would be the vinyl flooring.

Ceiling

The ceiling in the Phaeton motor home is covered with a padded-vinyl headliner which can be easily cleaned with a damp, soft cloth and a mild detergent. Take care to clean around any vent areas to prevent any build-up of dirt or grease or other accumulations.

Window Treatments

Throughout the Phaeton, the window treatments consist of pleated day/night window shades which have two sections. When closing the shade, the first section to become visible is the “day” section which is translucent and permits outside, ambient lighting to come into the motor home while blocking visibility. If the shade is continued to be closed, one encounters the “night” section which places a heavier, more opaque material over the window to block out even more light from the outside. The “night” setting is generally used in the evening or when a greater degree of privacy is sought. All of the curtains installed in the Phaeton are to be dry-cleaned only; no water-based cleaning agents are recommended as they may cause undue shrinking or fading of the fabric.

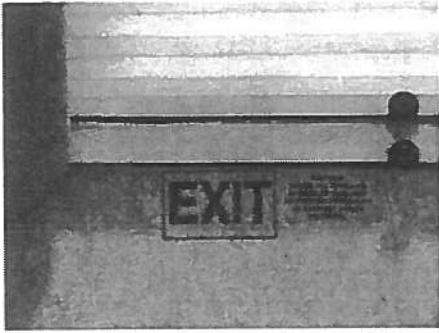

On some windows, mini-blinds may be installed. Instructions for the proper use and cleaning of any mini-blinds will be found in the Owner’s Information Package furnished with the Phaeton.


Plumbing & Bath Fixtures

PLUMBING & BATH FEATURES

FRESH WATER SYSTEM

Monitor Panel

The monitor panel permits checking the approximate levels in the fresh, gray, and black water holding tanks; the LP-gas level; and the condition of the battery. The monitor panel is generally located in an overhead cabinet above the passenger's seat. To use this monitor, simply press the "level test" button to read the fresh, gray, and black water tanks and the present condition of the batteries.

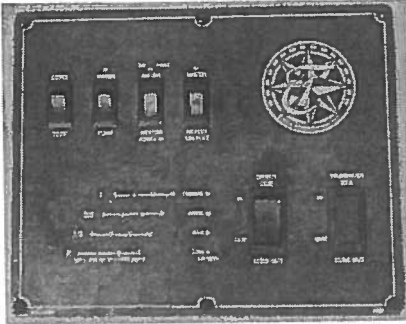

The "empty" indicator light will momentarily light when the button is pressed. If the tank is full, all of the lights will be "on." Lights are sequentially arranged to indicate fluid levels in approximately third-tank increments. For example: if the tank selected is approximately two-thirds full, then the indicator lights "E" (for "empty"), "1/3", and "2/3" will be lit.

On the right hand side of the "level test" switch is the water pump switch. This switch controls the power going to the pump and is used to turn that power either "on" or "off."

Kitchen Sink

The kitchen sink installed is a fiberglass or plastic, double-bowl sink equipped with two sink covers to provide additional counter space when the sink is not in use. For the sink, cleaning care consists of washing only with mild detergents and water and using a soft cloth for subsequent drying and polishing. The faucet in the kitchen may be a single-handle faucet.



Bath Sink, Shower & Accessories



The sink in the bathroom is a solid, continuous surface. When cleaning this surface, use care to prevent scratching or marring it. The typical bathroom accessories include a towel bar and a tissue holder.

The dual-handled faucet in the bathroom was chosen to match the specified decor. The bathing facilities installed may be a fiberglass shower or



PLUMBING & BATH FEATURES

combination shower/tub with a glass shower door. The tub faucet with showerhead, hose, and bracket are coordinated with the sink faucet.

Water Pump

The water pump is self-priming and totally automatic, operating on demand whenever water is required. The water pump is used to pressurize the fresh-water system when the unit is not connected to city water. The switches to this pump may be located in the bathroom, monitor panel, or sanitation-service compartment. To start the pump, follow these instructions:

1. Fill or partially fill the fresh water supply tank.
2. Open the kitchen and bathroom faucets.
3. Turn the water-pump switch "on" and allow the water to fill the water line and the hot water heater.
4. Close each faucet after it delivers a steady stream of water (close the cold-water faucet first). Leave the hot-water faucets "on" until they also deliver a steady stream of water. This procedure will assure that the water heater is filled with water.
5. The water pump should stop running once all faucets are closed.
6. The water pump is now ready for automatic operation. The pump will run when a faucet is open and stop when a faucet is closed.
7. Never allow the pump to run for long periods of time without water being present in the supply tank, as doing so may cause physical damage or blow fuses.



If water does not flow when a faucet is turned "on" while using the demand system, use the following troubleshooting chart:


SITUATION	SOLUTION
Pump running – no water	<ol style="list-style-type: none">1. Fill tank.2. Clear the water line to the pump.
Pump doesn't run	<ol style="list-style-type: none">1. Check the pump switch2. Check the 12-volt fuses3. Check the electrical connections4. Check the battery.

All of the water should be drained from the fresh water system when the unit is not in use for extended periods. For more detailed information regarding the water pump, one should refer to the water-pump manufacturer's brochure in your Phaeton Owner's Information Package.

City Water Connection

When connecting your unit to city water, be certain to use the water hose manufactured and labeled for potable-water service—this will assure that the hose selected for use will not alter the taste of the water. To connect the city water supply to the vehicle, connect one end of the hose to the city water supply; this connection will usually be to a faucet or valve similar to your garden hose valve at home.

Turn the city water supply “on” for a few seconds to clear the line. Once the hose has been flushed, turn the supply “off.” Connect the other end of the hose to the city-water connections on the motor home. Once the city-water fill valve is opened, water is supplied to the fresh-water system including the hot water heater, faucets, and toilet. Turn “on” the water supply and open all of the faucets to clear any trapped air within the plumbing lines within the motor home.



Once any air pockets have purged from the water lines and water flows freely, close all of the faucets. The city water supply is pressurized; therefore, the water pump is not needed when the water system of the vehicle is connected to the city water system.

To disconnect from the city water supply on the motor home, close the valve and remove the hose from the city water supply. Disconnect the hose from the city-water connection and store the hose in the water compartment.

Filling the Fresh-Water Tank

The fresh-water tank is normally filled from the city-water connection. The valve located in service compartment near the water connection determines whether the city water is going through the water system or into the fresh water tank. Since there is not an automatic shut-off when filling the fresh-water tank, check the level from the monitor panel while filling the fresh-water tank on the motor home.

The excess water will be vented from an overflow in vent pipe onto the ground when the capacity of that tank has been reached. This pipe is installed in the fresh water tank to prevent possible tank rupture from inadvertent over-filling.

Important

Be sure the potable-water fill cap is removed when filling the water tank from a city-water supply (which is typically under 60-80 psig pressure). Failure to do so may result in inadvertent expansion of and possible rupture of the water tank.

All of the water should be drained from the fresh water system when the motor home is not in use for more an extended period of time.

Sanitizing

To assure complete disinfecting of the fresh-water system, it is recommended that the following procedure be performed on a new system, on one that has not been used for a length of time, or one that may have become contaminated. This procedure is also recommended before long periods of storage, such as during the winter months:

1. Drain the fresh-water tank by opening the drain valves. There is one valve for each water tank. All of the faucets should be in the closed or “off” position.
2. Prepare a chlorine solution using one gallon of water and half a cup of chlorine bleach (5% sodium-hypochlorite solution). Prepare enough of the chlorine solution to administer one gallon of solution for every 15 gallons of tank capacity. For sanitizing this unit, prepare 4.5 gallons of the chlorine solution. This mixture puts a 50 PPM (parts per million) residual chlorine concentration in the water system that will act as a quick-kill dosage for harmful bacteria, viruses, and slime-forming organisms. Concentrations greater than 50 PPM may damage the water lines and/or the tank
3. Once the fresh water tank is empty, close the drain valves in the water tank.
4. Pump the chlorine solution into the tank—this procedure is done by placing the winterizing hose into the chlorine solution. Close the valve from the fresh water tank to the pump and open the valve from the solution to the pump. Turn the tank fill valve from “city water” to “tank fill.” Turn on the water pump until all of the solution is pumped into the fresh water tank.
5. Turn off the water pump. Then close the valve to the solution. Open the valve from the tank to the water pump. Fill the water tank with the city water tank fill (or by using the same method as was used to put the sanitizing solution into the tank).

PLUMBING & BATH FEATURES

Remove the water filter (from the drink dispenser faucet, if installed) and install the by-pass pipe to allow the sanitizing solution access to the faucet. Open each faucet, in turn, including the kitchen faucet, bath faucet, inside and outside showers, turning "on" both the hot and cold faucets, and flushing the toilet until all of the air has been purged from the pipes and the water runs freely. The entire system will then be filled with the sanitizing solution.

6. Allow the 50 PPM disinfecting solution to stand in the system at least four hours.
7. Drain the system and flush it with fresh water. The water system needs to be flushed with water repeatedly, if necessary, until there is no chlorine taste or smell left in the system. To remove any excessive chlorine taste or odor that might remain, prepare a solution of one quart of vinegar to five gallons of water. "Rock" the tank containing the solution by moving the vehicle forward and backward several times to clean the tank; then drain that tank and re-fill with clean water.

Water Filter (Optional)

This unit is equipped with a water filter which must be removed before disinfecting the fresh-water system. First remove the water filter and then install the by-pass pipe to allow the sanitizing solution access to the faucets. As installed, the filter will remove chlorine, dirt, and other matter. The filter will also eliminate most phenol (or similar) odors and tastes while delivering sparkling, taste-free water for drinking and cooking.




The water filter is located in the sanitation compartment on the outside of the motor home. The water filter is not guaranteed to remove the tastes and odors of iron and sulfur. To remove these impurities, one would need to chlorinate the water. Replacement filters are available that will filter iron and sulfur. Ask your dealer or RV supply center about purchasing an iron and sulfur filter, if such is desired.

If you are traveling in an area where the water has a high iron and sulfur content, then add one tablespoon of chlorine bleach to every 10 gallons of water in your tank--this will precipitate the iron or sulfur so that the filter can remove those impurities.

If you are at a site where the unit is connected to a city water supply, you will not be able to chlorinate the system because the water flows straight to your faucets and not through the fresh-water tank. Filters should be changed every 6-12 months depending on the quality and quantity of water that is used in your vehicle.

Water Heater Bypass System

The water heater bypass valve is located in an outside compartment near the water heater. By closing the water heater supply valve and opening the bypass valve, one can divert water away from the water heater. This process is performed when winterizing your motor home. Using the bypass valve will keep antifreeze out of the water heater when winterizing the motor home.

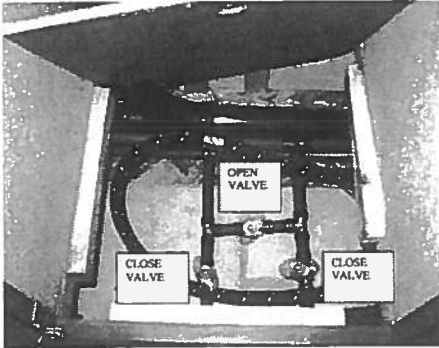

Draining the water heater during winterizing is a **MUST**. As shown in the accompanying picture, one should close the two outside valves and open the center valve. To prepare the motor home for re-use, open the two outside valves and close the center valve.

Fresh Water Lines

Vibration and flexing encountered when the motor home is traveling can cause pipes and fittings to become loose. Check all of the plumbing connections for leaks at least on an annual basis. If the water pump runs when all faucets are turned “off,” check for a possible leak. Be sure that the drain valves are closed. Connections at the kitchen and bathroom faucets normally seal by hand-tightening them and then making an additional half-turn with a wrench.

If a fitting leak persists, disconnect it completely and visually inspect it for mineral deposits or foreign material stuck on the sealing surfaces. Clean the surfaces thoroughly and reinstall the fitting. Take the motor home to an authorized Tiffin Motorhomes service center for additional repairs if the water system continues to leak. Follow the winterizing instructions given in Chapter 14 to reduce risk of leaks caused by cracks from freezing pipes. Left unchecked, freezing damage can be extensive and expensive.

WASTE WATER SYSTEMS

General Information

The waste drainage system was designed to provide adequate and safe storage and /or disposal of waste materials. All of the materials used in the fabrication of this system are tested by a nationally- recognized testing laboratory. The drainage system uses plastic piping and fittings connected to the sinks, toilet, and holding tanks.

This plumbing permits the drainage of these fixtures to an outside termination. The vehicle should be reasonably level for best operation of both of the waste-water systems (there are two, separate waste-water systems). The gray-water system is for waste water from the sinks and shower. The black-water system is for sewage waste from the toilet. Each waste-water tank has its own control valve and both drain through a common sewer-drain hose.

Toilet

The toilet in your motor home may be a china toilet equipped with a spray attachment. The toilet operates with water from either the fresh water tank with the water pump "on" or the city water supply. Before using the toilet, add water to the bottom of the tank. Refer to the "BLACK WATER TANK" instructions elsewhere in this chapter.

The toilet flushes waste directly into the black-water holding tank. The toilet uses high-velocity water injection to produce swirl effect in the bowl. The greatest problem that causes stool solids to accumulate in the holding tank is lack of liquids.

When using your toilet, it is wise to fill the toilet 3/4 full of water-- this will help wash the solids away from directly below the toilet and to assure complete dumping of the holding tank. To add water to the toilet bowl, lift or raise the flush lever until the desired water level is reached. To flush the toilet, push down on the lever until the water swirls. A small amount of water should remain in the bowl.

The toilet should be cleaned regularly for maximum sanitation and operational efficiency. Clean the toilet bowl with a mild bathroom cleaner. **DO NOT USE CHLORINE OR CAUSTIC CHEMICALS, SUCH AS LAUNDRY BLEACH OR DRAIN-OPENING TYPES, AS THEY WILL DAMAGE THE SEALS IN THE TOILET AND DUMP VALVES.**

Refer to the toilet manufacturer's owner's manual in your Phaeton Owner's Information Package for complete instructions and a detailed troubleshooting guide.



P-Traps

Each of the sink drains, the shower drain, and the washing-machine drain (if so equipped) has a water trap (P-trap) to prevent holding-tank odors from entering the vehicle. These traps must have water in them to trap odors. When the vehicle is in motion, the water may splash out of the sink and shower drains. When the vehicle is stored, the water may evaporate from these traps allowing odors to enter the vehicle. If this occurs, run water from the faucet into the drain, thus allowing water to fill the traps again.

Black-Water Holding Tank

The “black water” (i.e., sewage) holding tank is located directly beneath the toilet. Before using the toilet, you will need to treat the tank with water that is mixed with an odor-controlling chemical. These chemicals are readily available at any RV supply store. Be careful not to spill the chemicals on your hands, clothing, or the carpet because such may cause a permanent stain. Pull the toilet levers forward to allow the chemicals to mix with the toilet water. Continue pulling the toilet levers until a depth of at least one inch of solution is directly under the toilet. Release the levers and the waste tank is now ready for use.

Caution

Use only approved RV odor-controlling chemicals in the holding tanks. Products containing ammonia and petroleum will damage the ABS plastic holding tanks and seals.

Gray-Water Holding Tank

The gray-water holding tank is located in the underbelly of the vehicle. It is primarily used for the drainage from the kitchen and bath sinks and the shower.

Waste Water Disposal

Both of the holding tanks terminate in a valve arrangement that permits draining each tank separately or together. It is recommended to drain the black-water tank before the gray-water tank. This procedure permits the water from the gray tank to wash the black-water residue from the drain lines and hose. The valves that open to release the water are called gate valves. The blade that closed the opening in the sewer drain pipes is connected to the T-handle to release contents of the tank(s) when pulled. The sewer line must be securely capped during self-containment use to prevent leakage of waste materials on the ground or pavement. Do not pull the holding tank gate valve open when the protective cap is installed on the pipe. Always drain the tank into an acceptable sewer inlet or dump station.

Whenever possible, drain both the holding tanks prior to traveling. The carrying capacity of your vehicle will be reduced if water is left in the black or gray tanks.

The holding tanks should only be drained when they are at least 3/4 full. Doing this will provide a sufficient volume of water to allow the complete flushing of waste materials in the drain lines and hose. If the tanks are not 3/4 full, add enough water to allow for sufficient flushing.

To empty the waste-water tanks, connect the adapter, supplied with your vehicle, to the drain hose. If the adapter is lost or broken, another one can readily be purchased from any RV supply store. Once you have placed the adapter on the drain hose, it can remain there for the life of the hose. One end of the hose threads up through the hole in the bottom of the service compartment and the other end of the hose feeds into the sewer at the dump station.

Unscrew the cap off the drain. Connect the hose, with the adapter in place, to the drain fitting. Open the gate valve all the way by pulling on the T-handle. The tank will start to drain as soon as the T-handle is pulled. After you have drained the black-water tank, immediately drain the gray-water tank. This procedure helps to flush the black water from the sewage hose.

When both of the tanks are empty, flush them with a fresh-water rinse before you close the valves. The gray tanks are easily flushed by pouring a couple of gallons of water into a sink drain. The drain outlet is engineered for quick release of the drain hose adapter. Always close the gate valves and secure the end cap to prevent leakage while the vehicle is in transit.

After draining the black-water tank, it is recommended to add a holding-tank deodorant (such as Thetford Aqua-Kem) to help control the odor and break down the solids. Follow the instructions given on the holding-tank deodorant package.

When using dump stations for draining the holding tanks, keep other travelers in mind. Please practice good housekeeping! Leave the dump stations in good order. Above all, do not pollute!

Camping with Sewer Connection

When camping at parks with sewer connections, it is important to keep the black-water, holding-tank, gate valve closed at all times, except when dumping. The gray tank can be kept open while hooked to a sewer connection, but again, the black-water tank must be kept closed. This is done so that an ample quantity of liquid remains in the tank to provide a smooth flow through the gate and drain valves when dumping.

Sufficient liquid in the tank causes a swirling action that should take any accumulated solid wastes with it. Accumulation of solid wastes in the black-water tank can be avoided by keeping the gate valve closed when connected to the sewer connection. If the valve is open, solid wastes may accumulate in the tank which may eventually result in costly repairs.

Caution

The gray tank valve must be in the "open" position when operating the optional washing machine.

No-Fuss Flush

This vehicle may be equipped with a flushing system for the black-water holding tank. When draining your sewer tank, attach a water hose to the sewer spray connection. After the tank is drained, leave the gate valve open and open the water valve allow water to spray inside the sewage tank; this will clean the inside of the tank of any debris that may be left inside the tank. After this procedure is done, disconnect the fresh-water hose and close the gate valve.


Caution

Be sure the Gate Valve is "open" when flushing the tank. Do not use the same hose for the No Fuss Flush that is used for filling the fresh water tank.

Exterior Shower

Your Phaeton has an exterior shower, for your use and convenience outside. That exterior shower is located in the service compartment, which is located on the driver's side of the motor home. The exterior shower feature allows you to do such things as rinse off sand or grass, muddy shoes, or bathe yourself outside of your motor home.

The faucet operates just as it would in your kitchen or bathroom. In addition to the shower itself, there is also a soap dispenser conveniently situated in that same compartment and a light to permit use under low-light conditions.

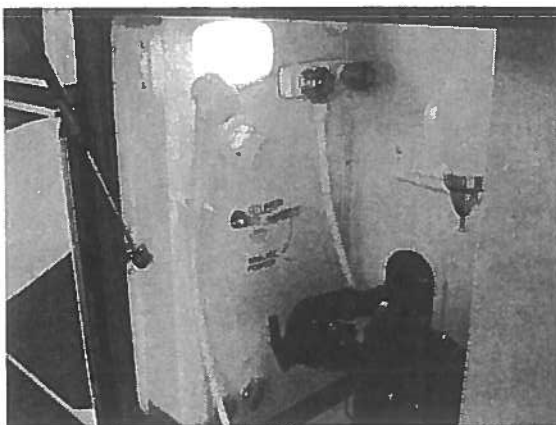


Construction Features


Construction Notes

Your Phaeton manufactured by Tiffin Motorhomes is constructed of the finest materials available by well-experienced craftsmen at the Tiffin Motorhomes manufacturing facilities in Red Bay, AL. Every care and concern have been taken throughout the total manufacturing process to assure you of the finest motor home available in the marketplace to day. To give you a better appreciation of the features of the Phaeton motor home, some of its construction features are now presented.

The Phaeton is built on a Freightliner chassis powered by a Caterpillar (standard) or Cummins (optional) diesel engine. The floor decking is constructed of ½" OSB board to provide desired rigidity and firmness in the floor of the motor home. The floor is insulated with block foam to provide both thermal insulation and sound deadening to keep road-surface noises from unduly entering the motor home. The motor-home roof is also insulated with block foam to provide an adequate barrier to heat loss or gain through the roof.

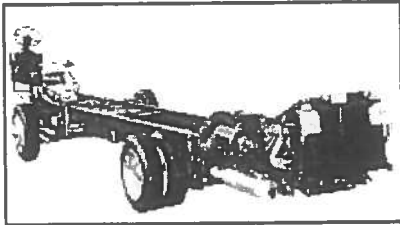


In the Phaeton, each sidewall is manufactured to provide essential strength and durability and is also insulated to assure the comfort of the enclosed spaces. Sidewalls are constructed of aluminum or steel framing, insulated with 1.5"-thick block foam insulation. Framing and insulation are laminated between interior décor board and Gelcoat fiberglass on the exterior to provide superior strength and rigidity. The insulation is chosen to both provide a sound-deadening barrier from outside noises and to provide more effective thermal control of the enclosed cabin in the motor home.

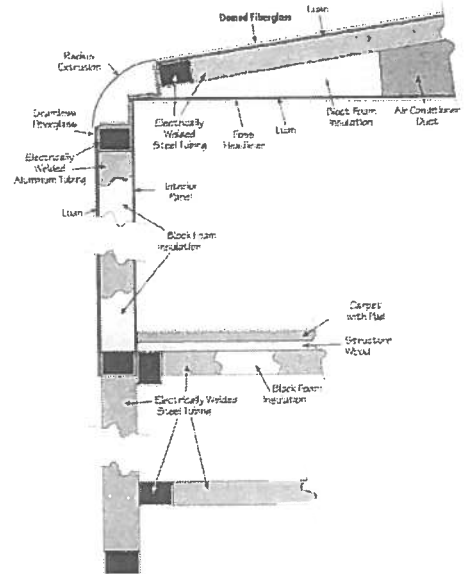

Typical Floor Plan

Although there are many variations of the floor plans for the Phaeton, depending on the desires and requirements of the individual Phaeton owner; a "typical" floor plan is presented to show the relative components of the Phaeton.

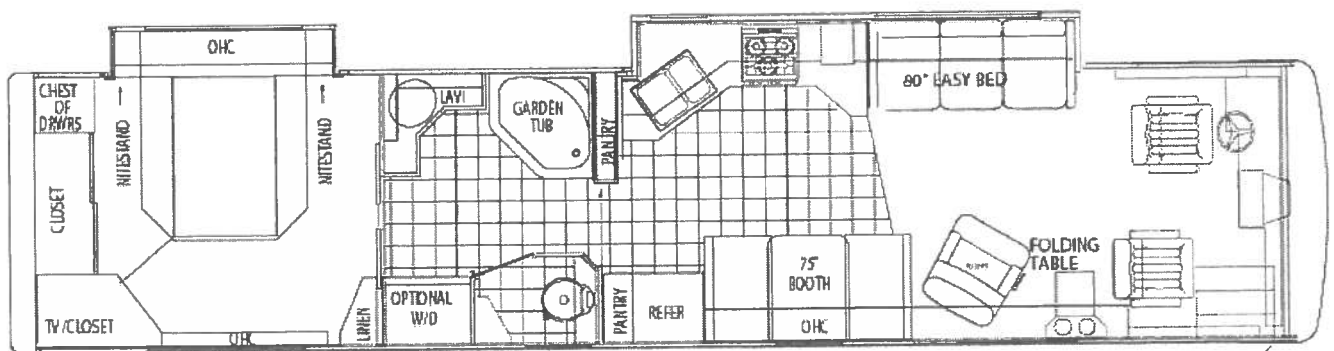


Windows, Awnings, Vents, & Doors

Windows

The windows on the Phaeton are of the sliding type. Double-pane windows are available as an option to provide additional thermal control (i.e., insulation) to maintain interior temperatures better. In the double-pane windows, a “dead air” space (filled with a dry, inert gas) is sealed between two panes of glass—this “dead air” space provides additional thermal insulation for the windows and prevents them from fogging internally. Additionally, there may be a reflective coating on the windows to reflect back a portion of the sunlight to reduce the heating of the motor-home interior and to reduce the effects of the sun’s “bleaching” of interior fabrics (curtains, upholstery).

For both the driver’s and passenger’s windows, additional sun shades are available to permit blockage of the sun’s rays which may interfere with driving. These shades can be deployed, as needed, and then moved out of the way when no longer desired.

In the bedroom, one particular window will be marked with an “EXIT” label—this is an emergency escape only to be used when normal exits are blocked or inaccessible. To use this emergency escape, merely lift the red handles at the bottom of the window and push outwards to open the window.

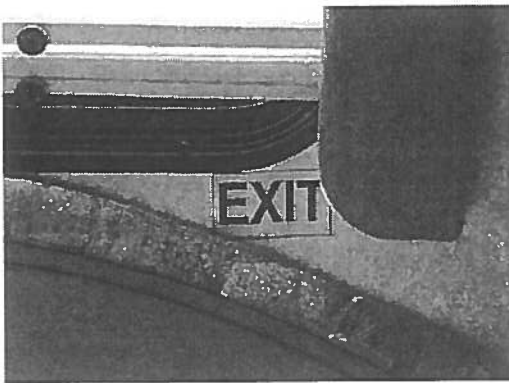

Should it be necessary to use this exit, please look for a secure footing, both inside and outside, when exiting so that no personal injury is sustained in the process. It is also prudent, when parking the motor home, to be aware of where this “emergency-exit” window will be situated so that it is not inadvertently blocked or impeded from its normal, intended operation, should such become necessary.




Awnings (Optional)

The patio awning is an option on the Phaeton. If it is installed, use the following directions to operate the awning properly:

Extending the Awning

1. Loosen the black, adjustment-lock knob on either side of the main arm of the awning. Flip the travel lock latches upwards.
2. By using the pull-rod provided with the awning, reach up and pull the locking lever forward to release the awning.

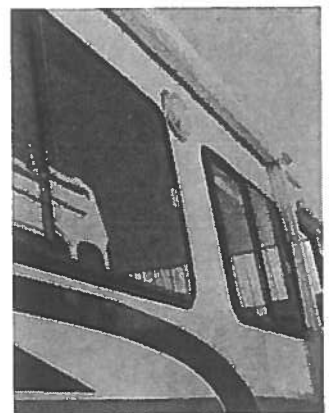

3. Hook the rod unto the loop of the pull strap and pull the awning all the way out to its fully-extended position.
4. Slide one rafter arm up until that arm snaps into place. Push down on the main arm to remove any slack that may remain in the fabric of the awning; then tighten the black adjustment knob. Repeat this process for the other side.
5. Slide the pull strap to the right end of the roller and wrap that strap around the main arm.
6. Pull up on the lift handle and raise the arm assembly to the desired height. Swing the handle “in” and allow the lock button to snap into one of the holes. Repeat this process on the other side of the awning.
7. Press the release lever at the bottom end of one main arm; pull the arm assembly outward to a vertical position and readjust the height. Repeat this process on the other side of the awning. During any rain, lower one end to permit water runoff.

Caution

Since damage resulting from weather is not under warranty, anytime a heavy or prolonged rain or blustery winds are anticipated, it would be advisable to close the awning. Similarly, if the awning is to be left unattended for any prolonged length of time, it would be prudent to close that awning.

Retracting the Awning

1. Raise the lift handle to release the lock button. Lower the main arm to the stop plug. Swing the handle “in” to engage the lock button in a hole. Repeat on the other side of the awning.
2. Loosen the black adjustment knob, lift the slider catch, and then slide the rafter arm downwards to the bottom of the main arm. Leave the black adjustment knob loose. Repeat this process on the other side of the awning.
3. Grasp the pull strap and pull towards you. Flip the locking lever to the “ROLL UP’ position. Hold the awning in the “down” position until you are ready to roll up the awning. BE CAREFUL – the awning will try to roll up as soon as the locking lever is flipped to the “ROLL UP’ position.
4. Slide the pull strap to the center and, by using that strap to control speed, allow the awning to return to the side of the motor home. Allow the strap to wind diagonally to prevent a bulge in the fabric of the awning.

5. Tighten the black adjustment knob and flip the travel lock latch down. Repeat this process on the other side of the awning. The awning is now fully retracted and is ready for travel.


NOTE: Be sure that the awning is fully locked into position on both arms before travel. Failure to do so may cause the awning to deploy when the motor home is in motion.

Vents

The kitchen has a 12-VDC Fantastic vent fan installed to exhaust kitchen odors. For normal operation, the vent is controlled by a thermostat mounted on the vent. Once the vent power switch is in the “on” position and the thermostat is set to a particular temperature, the vent fan will operate until the temperature set-point is reached; at which time the vent fan will automatically turn “off.” The vent fan should only be left in the “on” mode when the motor home is parked and in use.

If the motor home is to be unattended for long periods of time or is to be in storage, make sure that the vent fan is turned “off.” Were the fan left “on,” blustery winds or severe storms may prevent the vent from closing and, consequently, may permit leakage, with possible damage, into the motor home.


The bathroom also contains a 12-VDC, vent fan which is controlled by an “on/off” switch mounted on the bathroom wall.



Doors


Caution

Always secure the dead-bolt lock while the motor home is in motion to prevent accidental opening of the entrance door.

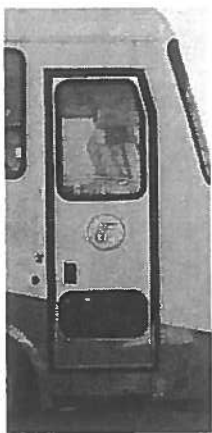

The primary entrance door to the motor home is a radius door having a key lock and a deadbolt for additional security. When the door is fully opened, the door hinge automatically holds the door in an “open” position. To close the door from this “open” position, either the inside or outside handle must be released to permit the door to move; then the door may be closed and then locked, if desired.

There is also a screen door associated with the entrance door; the screen door will permit increased air circulation when the entrance

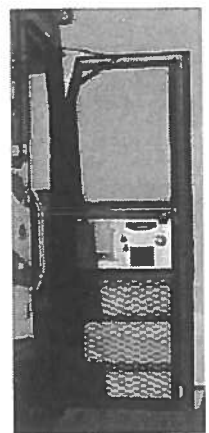

door is open. To enjoy this benefit, the screen door is operated independently of the entrance door.

However, when one wishes to close the screen door and the entrance door at the same time; the screen door latch must be fastened to the entrance door prior to closing the entrance door. Failure to do so will cause the screen door latch to be bent.

Routine Maintenance

EXTERIOR CARE

Important

Damage caused by improperly-performed maintenance or inadequate maintenance is not covered by your Tiffin Motorhomes Limited Warranty.

Washing

The exterior of your new motor home is made of pre-finished fiberglass. Frequent washings and thorough cleanings are required to prevent damage to the motor-home finish after exposure caused by damaging salts, calcium chloride, road tar, tree sap, insects, and other foreign material. Damage caused by exposure to these items is not covered by your warranty agreement. Never wash the motor home in direct sunlight, while the motor home is hot, or with hot water. Any accumulation of mud and dirt under the body can cause damaging rust on steel parts.



Corrosive materials, such as those used for ice and snow removal and dust control, also can accumulate on the underside of the motor home. These accumulations, especially in vehicular areas where mud and other foreign materials could collect, should be removed by flushing those areas (e.g., the underside) of the motor home regularly with water. The chance of corrosion can be minimized with frequent washings of the motor home.

When washing the motor home, make certain that the undercarriage and the wheel wells are thoroughly cleaned, as well as the exterior of the motor home. Do not use strong soaps or detergents for washing the motor home. Always use a mild soap in warm water, a commercially-prepared product for automotive finishes, or your local car wash to wash your motor home properly. Be careful when using any pressurized washer to avoid loosening any exterior decals or sealants and the like.

After washing, carefully inspect the caulking around the window frames and vents and any other joints to see if any seal separations have occurred. Should any re-caulking be necessary, it is relatively simple and is considered to be routine maintenance which is the responsibility of the owner.

Important

Never use a strong solvent, such as lacquer thinner or harsh abrasives on any of the exterior-painted surfaces.

Waxing

The exterior finish will require a routine waxing. When water will not bead and roll off a freshly-washed motor home, a new coat of wax is needed. Wax not only improves the appearance of the motor home, but it also protects the finish against oxidation and corrosive materials. The recommended type of wax is one that is compatible with painted and gel-coated fiberglass finishes and contains an UV (ultra-violet) inhibitor. Buffing with a polishing compound will improve a dull or discolored finish.

Important

When using a polishing compound that does not contain a wax preservative, reapplying a coat of hard wax after polishing is recommended.

Seals

The seals around the doors, windows, vents, slide-out trim, and external seams should be checked at least semi-annually. Additionally, the roof seams should be inspected for cracking or peeling semi-annually. If deterioration is noted during a routine-maintenance inspection, reseal the seams or seals with an approved sealant to prevent leaks.

Your Tiffin Motorhomes dealer can perform the resealing inspections and subsequent work, if any, for you. It is recommended that a Tiffin Motorhomes authorized service center perform these inspections periodically and perform necessary resealing, when necessary.

Proper Sealants for Application


The following sealants are recommended for specific sealing applications, as noted in the table:

ROUTINE MAINTENANCE

Recommended Sealants for Specific Sealing Applications	
SEALANT	APPLICATION
Plas-T-Cote	Metal or fiberglass roof
Surebond #SB-140	Rubber laminated to metal roof and ALL SKYLIGHTS
Carlisle #502-LSW Self-Leveling Sealant	Rubber roof over wood base
Silicone Sealant	To cover butyl and other sealants; not to be used as the main sealant
Parbond	To seal across tops of windows and the like on exterior surfaces where silicone is not used

Striping and Decals

The striping and decals on your motor home normally require very little maintenance. Treat these as you would any painted surface on your motor home. Wash them with mild soap and

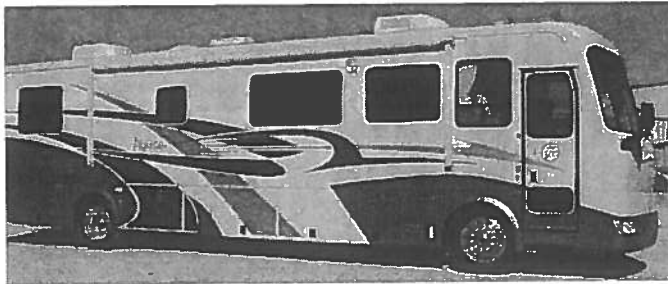

warm water or any retail car soap. Never wash the motor home in direct sunlight, while the motor home is hot, or with hot water. Rinse thoroughly to prevent accumulation of any soap residues. Use caution with high-pressure wash nozzles. Keep such nozzles at least 18 inches from the edge of the decals

during any washing operations. If this is not followed, high-pressure water nozzles may cause the decals to loosen and subsequently to peel. Test small sections of decals when using any type of cleaning solution.

Important

Do not use solvents such as acetone, MEK, toluene, and the like on the decals. Any solvent including alcohol may soften and smear colors. Do not use lacquer thinner or paint thinner on decals. Do not overcoat the decals with clear paint. Do not allow gasoline or other fuels to come into prolonged contact with the decals. However, if this should occur, immediately flush the affected area with water.

ROUTINE MAINTENANCE

Wheel Care

The care and maintenance of your wheel liners are simple and require no special material or products; simply follow the directions included in the Owner's Information Package for these wheel liners (or the optional Alcoa aluminum wheels). Timely care and cleaning will maintain the appearance of these wheel products for many years.

Important

Do not use harsh detergents, acids, or abrasives which may scratch or dull the surfaces. The applicator cloth, sponge, or soft-bristled brush should be non-metallic and non-abrasive.

Important

Remember to check periodically the tightness of your wheel lug nuts.

Roof Care and Maintenance

Proper care and maintenance of your motor home, including your roof, is important for sustained, trouble-free performance. Normal maintenance is simple and easy and does not require special materials. The roof of the motor home is fiberglass and can be cared for in the conventional manner. Keep the roof clean; one should clean the roof at least every three months.

Warning

Use caution when working on the top of your motor home. The wet roof may be extremely slippery and, as such, a possible safety hazard.

ROUTINE MAINTENANCE

Tire Pressure

Correct tire inflation pressure is essential to maximizing the life of the tires and assuring the safety of the vehicle and its occupants. Driving with tires that are not correctly inflated for the load of the motor home is dangerous and may cause premature wear, tire damage, and/or loss of control of the motor home.

An under-inflated tire will build up excessive heat that may actually approach the vulcanization temperature of the rubber and lead to tread separation and/or disintegration of the tire. Additionally, under-inflated tires will also cause poor handling of the motor home, rapid and/or irregular tire wear, and an increase in rolling resistance of the motor home which, in turn, produces a decrease in fuel economy of operation.

An over-inflated tire will reduce the tire's "footprint" (i.e., its actual contact with the road); thus, reducing the traction, braking capacity, and handling of the motor home. A tire that is over-inflated for the load that it is carrying will also contribute to a harsh ride, uneven tire wear, and the tire itself will be more susceptible to impact damage.

Maintaining correct tire pressure for each loaded wheel position on the motor home is critically important and must be a part of regular vehicle maintenance.

Tire Maximum Load Rating

Federal law requires that the maximum load rating be molded into the sidewall of the tire. If one looks at a tire sidewall, one may see some "typical" information, such as:

Max. Load Single 3640 Lbs at 85 psi cold

Max. Load Dual 3415 Lbs at 85 psi cold

The maximum load allowed for the size tire and load rating and the minimum cold air-inflation pressure needed to carry that stated maximum load are noted on the tire. Using less air pressure would reduce the load-carrying capacity of the tire.

The amount of air pressure one needs depends on the weight of the fully-loaded motor home. Consequently, one cannot determine the correct air-inflation pressure, unless one knows the actual weights of the motor home.

Weighing the Motor Home

Earlier, in Chapter 1, the procedures for weighing the motor home were presented (see pp. 1-6 and 1-7). These procedures provided the weighing of a “non-loaded” (i.e., not stocked with the possessions and provisions the user would normally have on board for travel) motor home. Obviously, any additional weight stored on board (inside and underneath) the motor home will contribute to the overall weight of the motor home.

If not stored uniformly throughout the motor home, additional weight of the possessions and provisions of the motor-home user will load each axle and each tire differently (front-to-rear and side-to-side distribution of that additional weight). Accordingly, it is necessary to weigh the motor home fully loaded as the user would have it for travel. Moreover, it is necessary to weigh each tire position individually.

Overloading the motor home can produce problems with the tires, wheels, springs, brakes, drive train, and other motor home assemblies. In addition, an overloaded motor home uses more fuel, is more difficult to handle properly, and can lead to driver fatigue more quickly. In a worst-case condition, if any component should fail, this could result in loss of control of the motor home and subsequent damage.

In certain states, the Highway Patrol routinely weighs motor homes to check for overloaded axle weights. Therefore, there are many good reasons for assuring that the motor home is properly loaded and not overloaded—this can be accomplished through a proper weighing of the fully-loaded motor home.

One can find various places that have certified public scales where one’s motor home can be weighed. For example, moving and storage company lots, farm suppliers with grain elevators, gravel pits, recycling companies, and large-scale commercial-truck stops are some of the possible locations for weighing the motor home.









One can also check the Yellow Pages of the telephone book for “scales – public” or “weighers” to determine other locations for weighing the motor home.

A brief overview of the procedure for weighing the motor home is shown in the following figure:




ROUTINE MAINTENANCE

WEIGHING YOUR SINGLE AXLE RECREATIONAL VEHICLE

RV: To Obtain Individual Axle and Gross Vehicle Weights:

	STEP 1a	STEP 1b	STEP 1c	STEP 1d
				
				
Scale Weight	_____ lbs. (Step 1a = GAW)	_____ lbs. (Step 1b = GVW)	_____ lbs. (Step 1c = GAW)	_____ lbs. (Step 1d)
From Owner's Manual	GAWR _____ lbs.	GVWR _____ lbs.	GAWR _____ lbs.	Vehicle Weight (GCWR-GVW) _____ lbs.

To Obtain Individual Wheel Position Weights:

	STEP 2a	STEP 2b	STEP 2c
			
One Side Scale Weight	_____ lbs. (Step 2a)	_____ lbs. (Step 2b)	_____ lbs. (Step 2c)
Calculate Other Side Weight	_____ lbs. (Step 1a-2a)	_____ lbs. (Step 1b-2b)	_____ lbs. (Step 1c-2c)
Tire Load (lbs.)	_____ lbs. (See Note #1)	_____ lbs. (See Note #1)	_____ lbs. (See Notes #1 & 2)
Inflation	_____ psi (See Note #1)	_____ psi (See Note #1)	_____ psi (See Note #1)

Note 1: From the tire manufacturer's load and inflation tables or the sidewall of the tires mounted on the motor home.

Note 2: If the motor home has duals, read dual capacity from the tire and multiply by 2 (two) to obtain dual-assembly load-carrying capacity.

More detailed information can be found in the manufacturer's literature associated with the chassis and/or the tires provided with the motor home. For example, the following table illustrates the inflation pressures for Michelin tires as a function of the loads per position for a specified speed of the motor home. In this manner, one can determine the appropriate inflation pressures for each of the tires on the motor home, as a function of the loads they are to carry on the trip(s) the motor home is to take. Whenever there is a significant change in the loading regimen of the motor home, it would be wise to recalculate the load weights of the tires to assure optimal use of the motor home.

INFLATION PRESSURES FOR MICHELIN TIRES

Size/Model	Load Range	Inflation Pressures (PSI)										
		Loads Per Position (in lbs.) at Different Pressures										
		1 Tire=Single (S)					2 Tires=Dual (D)					
7.50R-16 XPS Rib	D (LRD)	PSI	35	40	45	50	55	60	65			
		Lbs	1620	1770	1930	2060	2190	2310	2440			
	D	PSI	2860	3130	3380	3630	3860	4080	4280			
		Lbs	55	60	65	70	75	80	85			
225/70R 19.5 Pilot XZA	F (LRF)	PSI	2475	2650	2835	3040	3220	3405	3640			
		Lbs	4760	5120	5510	5840	6170	6500	6830			
	F	PSI	55	60	65	70	75	80	85	90	95	
		Lbs	2475	2615	2755	2895	3040	3195	3315	3450	3640	
245/70R 19.5 XR.V	F (LRF)	PSI	4645	4910	5180	5440	5720	6000	6230	6490	6830	
		Lbs	65	70	75	80	85	90	95			
	F	PSI	3540	3440	3540	3640	3740	3890	4080			
		Lbs	6230	6430	6630	6830	7030	7310	7720			
245/70R 19.5 XR.V	G (LRG)	PSI	65	70	75	80	85	90	95	100	105	110
		Lbs	3340	3440	3540	3640	3740	3890	4080	4190	4335	4540
	G	PSI	6230	6430	6630	6830	7030	7310	7720	7880	8150	8600
		Lbs	75	80	85	90	95	100				
235/80R 22.5 XR.V	G (LRG)	PSI	3595	3815	4035	4280	4545	4675				
		Lbs	6790	7190	7630	8070	8555	8820				

ROUTINE MAINTENANCE

Frequency of Checking Tire Inflation Pressures

When one has determined the “correct” tire inflation pressures for each of the motor-home tires (as a function of the “fully-loaded” condition, of course) and inflated the tires under “cold” (i.e., tires haven’t been driven for more than one mile) conditions; then the air pressures in the tires should be periodically checked to make sure that they retain their proper pressures. It is recommended that tire pressures be checked at least once a month (every two weeks would be better) and before any major trip. On long trips, the tires should be checked every “drive” morning. On short trips (a day or less), the tires should be checked before one departs on the trip and again before one returns home.

Check tire pressures when they are “cold”; that is, the tires haven’t been driven at all or, at most, less than one mile before being measured. In this manner, the tire pressure has not been increased



by the heating associated with tire sidewall and tread flexure associated with traveling. If one must check tires that are warm or hot, remember that they will necessarily read higher than normal. Do not “bleed” these tires down to the “cold pressure” readings, as they will probably then be under-inflated when



they actually are cool. Don’t make any adjustments to tire pressures when the tires are warm or hot, if such can be avoided.

To make these tire-pressure measurements, it is recommended that one purchase a quality, truck-tire air gauge which has an angled dual head. This type of gauge allows one to check inflation pressures of both the inner dual wheel which has the valve stem pointing towards one and the one on the outer wheel which has the valve stem pointing away from one. Pressure-sealing valve caps should always be used to protect the valve stems and prevent air from escaping from the valve stems.

Tire Wear, Balance, and Wheel Alignment

In addition to tire inflation considerations, the tires should also be periodically examined for other types of normal “wear and tear.” If installed and maintained properly, all tires mounted on the motor home should wear in a smooth, even pattern. If the tires begin to show irregular wear patterns and the motor-home alignment is still correct, then sometimes just rotating the tires by changing wheel position and rotation of the tires will allow the tires to wear evenly.

Check with the chassis manufacturer (Freightliner) and its literature (in the Owner’s Information Package) for particulars on maintaining proper wheel alignment. Tire rotation should include the spare tire in the rotation pattern and changing the direction of rotation of the tires. Tires can be rotated front-to-rear and side-to-side.

ROUTINE MAINTENANCE

Tire Cleaning

Proper cleaning of the tires will assure maximum years of service. A soft brush and the normal mild soap should be used to clean the tires. Use care in applying any tire "dressing" product as these contain petroleum derivatives, alcohol, or silicones which may cause deterioration of the rubber, possibly leading to cracking, and accelerate the aging process. In many instances it isn't the actual dressing itself, but the reaction of that product with the antioxidant in the tire. Heat can compound this problem also.


INTERIOR CARE

Important

The fading of upholstery, carpet, and other interior fabrics is generally caused by excessive sunlight. The drapes, blinds, or other shades should be kept closed when the vehicle is parked for an extended period of time to minimize the fading. Normal deterioration of the appearance of such items caused by wear and/or exposure to strong lighting is not covered by the Tiffin Motorhomes Limited Warranty.

Carpet

A weekly routine of vacuuming the carpet and fabrics throughout the vehicle is recommended; the *optional* vacuum system has a central connection within the motor home wherein a vacuum hose can be connected and the necessary vacuuming performed, as desired. Doing such will prevent an undue accumulation of dirt which can detract from the appearance of the carpeting and, thus, shorten its expected life.



Remember to empty or replace vacuum bags before they become overly full—this practice will assure that sufficient vacuuming capability is readily available to handle any and all cleaning situations that may arise. In carpet areas that receive the most sunlight, close the curtains frequently to prevent fading. Also act quickly when anything is spilled or dropped onto the carpet to prevent or minimize

staining.

ROUTINE MAINTENANCE

Included in the Tiffin Motorhomes Owner's Information Package is the carpet manufacturer's Carpet Care Guide. The Carpet Care Guide lists detailed information on cleaning soil areas and removing stains from the carpet installed in the vehicle.

Fabrics

The fabrics used in this Tiffin motor home for the bedspread, draperies, headboard, and valances containing fire-retardant additives that may be damaged by use of improper cleaning products. Cleaning instructions for these items are **DRY CLEAN ONLY**. **Water-based products are not recommended for cleaning the fabrics in your new vehicle.** Most water-based, household-cleaning products are not formulated for use on these fabrics and may cause excessive shrinkage or fading. For best results, the fabrics in this vehicle should be cleaned by a professional carpet and upholstery cleaner.



Spills, spots, or stains should be treated as soon as possible to avoid permanent damage to the fabrics. If a spill occurs, blot the fluid with a dry towel; do not rub the spill as rubbing may cause the liquid to "set" in the fabric and cause a stain. When attempting to clean a spot or stain, always start from the outside and work inward to avoid spreading the stain further. Some stains or soils are extremely difficult or impossible to be removed completely. These stains should receive immediate, professional attention. Spills, spots, stains, or soiled areas are the responsibility of the owner and are not covered by Tiffin Motorhomes Limited Warranty.



Warning

When cleaning the upholstery and fabric of the motor home, do not use lacquer thinner, nail polish remover, laundry soaps, or bleach. Never use carbon tetrachloride or gasoline for cleaning purposes. These substances may cause damage to the materials being cleaned and most are high flammable.

Walls and Ceiling

The wall and ceiling coverings should be cleaned periodically to maintain a new appearance. Use a non-abrasive cleaner with a soft cloth on the walls. Do not use solvents of any kind, as those solvents may damage the surfaces being so cleaned.


ROUTINE MAINTENANCE

Dashboard

To keep the motor-home dashboard in like-new condition, regularly follow these guidelines:

DO:

- Dust and clean the dash with a soft, damp cloth or chamois, wiping the service gently.
- Use a mild detergent and lukewarm water.
- Dry the surface, after washing and rinsing, by blotting with a damp cloth or chamois.

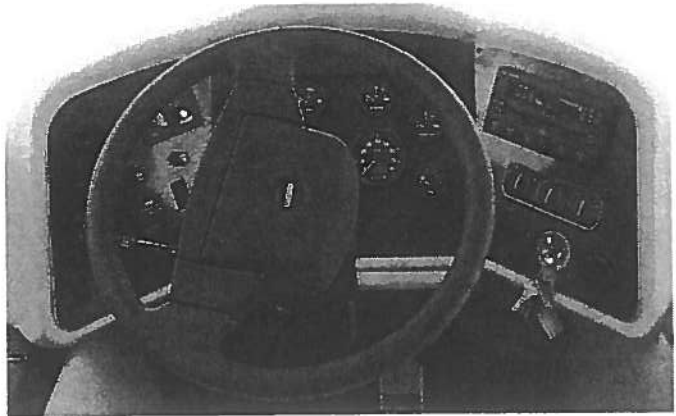


DO NOT:

- Use harsh chemicals that may damage the dashboard.
- Use cloths containing grit or abrasive particles or kitchen-scouring compounds to clean or dust the dashboard.
- Subject the dashboard to hard, direct blows.
- Use boiling water, strong solvents, or other such materials to clean the dashboard as they will soften the plastic.

Woodwork & Floors

The wood cabinetry should be cared for with furniture polish to sustain the natural beauty and luster of the wood. This procedure will also keep the cabinetry looking new, prevent the wood from drying, and reduce chances of accidental staining or aging.




Use area rugs and floor mats by the entrance door to trap dirt. Use soap and water to clean the (ceramic) flooring, begin by vacuuming the floor to remove loose dust and dirt. Then, damp mop the floor with a cleaning solution consisting of any standard cleaning solution available through retail-sales outlets (e.g., Wal-Mart, K Mart, Target) or grocery stores. The mop should be damp, but not dripping. Feel free to use soap-based cleaners, scouring powders, steel wool, abrasive cleaners, wax, or polish on the ceramic floor as this floor is impervious to

ROUTINE MAINTENANCE

these cleaning agents. To remove stubborn spots like shoe polish, oil, tar, markers, scuffs, and the like; use a household solvent or nail-polish remover on those spots; then wipe those treated areas with a damp cloth. To remove chocolate, grease, juice, or wine; use warm water and any off-the-shelf abrasive cleaner (cleansers and the like). To remove candle wax or chewing gum, carefully scrape off when the material has hardened. For further tips, please see the manufacturer's information sheet in your Tiffin Motorhomes Owners Information Package.

Countertops

To care properly for the countertops in your new vehicle, always use a heat pad or trivet to protect the surface from hot objects that may mar or damage the counter-top surface. Hot pans and heat-producing appliances (such as electric skillets), when set directly on top of the countertop, can possibly mar the beauty and finish of the product.

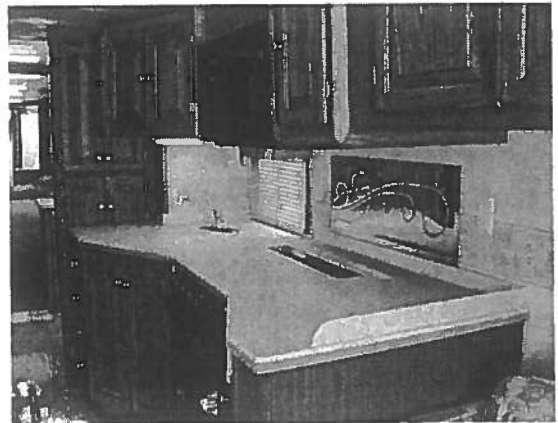

Additionally, since heat-producing appliances can also damage countertop seams, it is essential to check with Tiffin Motorhomes to identify seam locations to avoid them during subsequent use of the motor home. Although solid surfacing is repaired easily, certain steps should be taken to protect it.

Be sure to use a cutting board, rather than cutting directly on the countertop surfaces. Although minor scratches and cuts can be repaired, a little care will assure that the countertop surfaces will keep looking new for years.

Avoid using harsh chemicals on the countertop. Wipe the countertop with a damp cloth to remove water spots. For most dirt and stains, wipe with a damp cloth and use soapy water or ammonia-based cleaners (e.g., Windex).

If a stain doesn't respond to soap and water, for a matte finish, apply an abrasive cleanser and buff it with a Scotch-Brite pad, using a circular motion. Use the same technique in the case of a cigarette burn. If the finish is a gloss finish, please contact the dealer for specific cleaning instructions.

Do not expose the surface to harsh chemicals, such as paint remover, turpentine, nail polish remover, or any stove and drain cleansers. If these chemicals should come into contact with the countertop surfaces, immediately wash off these chemicals, using appropriate safety measures to avoid injury.

ROUTINE MAINTENANCE

In the event of subsequent staining or spotting, sand the affected surface lightly with fine sandpaper (400 grit or finer), then buff in a circular motion with a Scotch-Brite pad.

Accessories

The brass light fixtures, bath accessories, and faucets can be cleaned by wiping with a soft, damp cloth. Washing with warm water will remove dry water spots.

Do not use cleaners that contain harsh or abrasive chemicals. Alcohol or other similar solvents should never be used.



Detectors

The CO and LP detectors are self-contained and DO NOT require any maintenance other than normal cleaning and periodic testing. The smoke detector installed in the motor home is a nine-volt, battery-operated detector. The CO detector uses three AA batteries for its operation.

The batteries in the smoke and CO detectors need to be tested periodically and replaced, when necessary (usually semi-annually). When cleaning the case on any of the detectors, use a damp cloth or paper towel. Do not spray cleaners or wax directly into the case as this action may cause false alarms or hinder the normal operation of the detectors.

An inexpensive battery tester, available from any local electronics retailer, would be a good investment to make. This tester would allow checking of the batteries in the various alarms, any flashlights used in the motor home, and batteries in other appliances (e.g., portable radios, MP3 players, CD players, PDAs, and various electronic games) which may be in the motor home during travels.

Condensation

Important

Since surface condensation within the motor home cannot be controlled by the manufacturer, damage caused by condensation is not covered by the Tiffin Motorhomes Limited Warranty.

Damage may occur to your vehicle if excessive condensation exists. Accumulation of condensation on surfaces within your motor home occurs when warm, moist air contacts a

ROUTINE MAINTENANCE

cool surface. It is most evident on the inside of windows, but this problem can be controlled by:

1. Slightly opening a window or roof vent to allow the moisture to escape from the motor home.
2. A small dehumidifier is also very effective in removing moisture from the air.

Condensation levels are highest during times when a person is cooking or taking a shower in the motor home, but these occasions are not the only times condensation is present. Walls and ceiling panels may become wet when the moisture accumulates on these surfaces. Tiffin Motorhomes does not recommend the use of any catalytic heaters because of resulting extensive condensation.

ROUTINE MAINTENANCE SCHEDULES

Important

Always follow the chassis maintenance guidelines found in the chassis manufacturer's owner's manual.

All routine maintenance is the responsibility of the owner and is not covered by the Tiffin Motorhomes Limited Warranty. Use the maintenance record found in Chapter 15 to record all performed maintenance, as required.

Please note that any damage caused by improper or unperformed maintenance is not covered by the Tiffin Motorhomes Limited Warranty. Items supplied by other manufacturers may require specific individual maintenance not listed herein. Please refer the manufacturers' suggested maintenance guidelines in the Owners Information Package.

Important

Cosmetic adjustments and alignments must be performed within the first three months from date of original purchase for warranty consideration. Thereafter, these items are considered routine maintenance.

ROUTINE MAINTENANCE

Monthly

- Check the battery-water level.

Every Three Months

- Check LP gas lines for leaks with soap solution or leak detector.
- Clean the microwave hood exhaust fan filter and blades.
- Test smoke alarm, carbon monoxide detector, and LP gas detector.
- Check operation of windows, latches, and hinges.
- Clean the roof ducted air conditioner filter or filters.
- Clean and inspect door and window seals; reseal where necessary.
- Inspect and reseal around the tub and shower area where necessary.
- Lubricate the exterior door hinges and latches with a graphite (silicone) lubricant.
- Check, clean, and tighten battery cables and inspect batteries for proper fluid levels.

Every Six Months

- Inspect the slide-out for proper seal. If realignment is necessary, please contact an authorized Tiffin Motorhomes Service Center.
- Inspect the exterior rubber slide-out seals and apply an UV inhibitor, such as 303 Protectant.
- Change the battery in the smoke detector.
- Inspect and rotate the tires, as recommended by the tire manufacturer.
- Check all gas appliances for proper operation.
- Have the LP system inspected by a qualified technician.
- Lubricate the movable parts on the entrance step.
- Change the batteries in both the smoke detector and in the CO detector.

Annually


- Inspection of roof seams and joints should be performed by an authorized Motorhomes Service Center. If resealing is necessary, it is the owner's responsibility and is not covered by the Tiffin Motorhomes Limited Warranty.
- Sanitize the fresh water system.
- Wax and buff all gel-coat surfaces on the vehicle as described previously in this chapter.

Winterizing


To store your vehicle for the winter months, it is necessary to winterize the water system to help prevent freezing of this system. To do this, follow these instructions:

ROUTINE MAINTENANCE

1. Drain all the water from the water-system including the holding tank(s) and hot-water heater; it may be necessary to follow the manufacturer's literature for the hot-water heater.
2. Remove the factory-installed cap from the 1/2-inch brass valve installed on suction opening on the water pump.
3. Attach a clear vinyl hose to the valve and hand-tighten that connection; do not over-tighten. Place the other end of the hose into a gallon of fresh-water system antifreeze (one can refer to the local Tiffin Motorhomes dealer or representative for the fresh-water antifreeze formulation for your specific area).



4. Turn the brass handle 1/4 turn. (NOTE: Use the factory-installed Water Heater Bypass Kit to avoid filling the water heater with antifreeze.)
5. Turn on each faucet, one at a time, and allow pure antifreeze to run through that piping. Let about one cup drop into the drains to protect the traps.

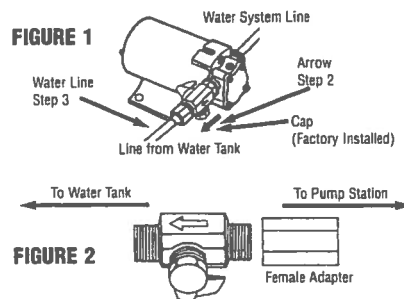

NOTE: Valve Handle Shown In Normal Water Use Position

6. When all the antifreeze is withdrawn from the bottle, remove the clear vinyl hose from the valve and replace the cap (this may require more than one gallon of antifreeze).


1. Close the antifreeze valve when the winterizing process is completed. Store the intake hose and turn the water pump "off."
2. Open the water supply valve that controls flow from the pump to the tank to help prevent freezing on that water line.

3. To de-winterize your vehicle, open both of the low-point drains to allow the antifreeze solution to drain from the water system. Next, close the low-point drains and connect your vehicle to the city water system. Put water in the fresh-water tank and pump at least one gallon through the water pump to remove the antifreeze from the water pump. Keep the water heater supply valve closed and the water-heater bypass valves open. The supply valve for the fresh water tank from the pump must remain closed. As in winterizing, open



ROUTINE MAINTENANCE

the kitchen faucet, bath faucet, inside and outside showers, turning “on” both the hot- and the cold-water valves and flushing the stool until the antifreeze solution is flushed out of the system and the water flow is clear. Once the system has been flushed, open the water heater supply valve and close the water heater bypass valve. Open the fresh water tank supply valve from the pump and the icemaker valve. Reinstall the water filter. Be sure to close the fresh water tank drain valves to allow the tank to fill. **Note:** remember, the Phaeton has an exterior shower installed; therefore, you must winterize this system, as well.



Maintenance & Data Charts

RV Owner's Data Sheet

Please enter the following information in the table for your future use:

Phaeton: Year: _____ Model #: _____ Serial #: _____			
Appliance	Brand	Model Number	Serial Number
Refrigerator			
Washer / Dryer (<i>optional</i>)			
Water Heater			
Microwave			
Inverter (<i>optional</i>)			
Television, Front			
Back-Up Monitor, Rear			
AM/FM/CD Stereo			
Video Cassette Recorder			
DVD Home Theater			
Air Conditioner			
Generator			

Reproduction Master – Copy this sheet and use copy to maintain your maintenance records. You may wish to keep the completed sheets in a three-ring binder for your permanent record.