


5.3.2 MOTOR CONNECTIONS




(C-3) PICTURE. 2 – MOTOR CONNECTOR, WIRE INLET, SIDE VIEW

Silk-screen printing	Logic ID	Range	Clamps	Features - description
(C-3)	MOT2	0 - 12Vdc	PIN 5	Motor (GREY)
	MOT1	0 - 12Vdc	PIN 4	Motor (BROWN)
		Not used	PIN 3	Not used
		Not used	PIN 2	Not used
		Not used	PIN 1	Not used

The motor has a 5-pole connector for a female movable connector represented in picture 2. The picture shows the connector from the cables connection side.


Wires No. 4 and 5 are motor connections, for the wiring please refer to diagram in picture 2.

5.3.3 WIRING

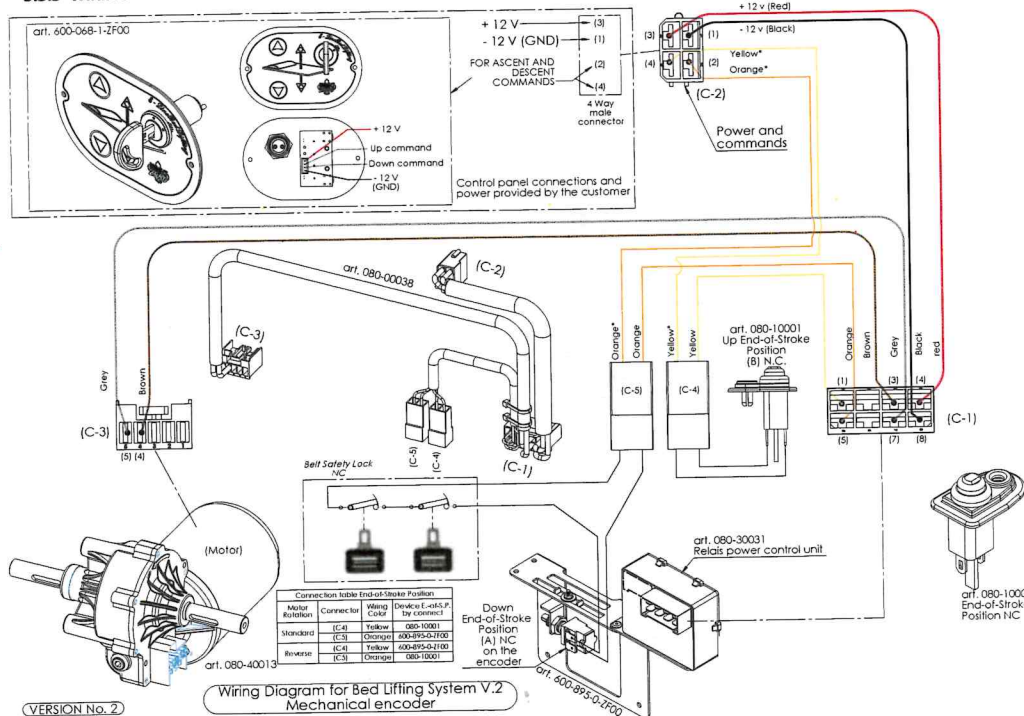

PICTURE 3.A – WIRING DIAGRAM

ELECTRIC SCHEME STANDARD ROTATION

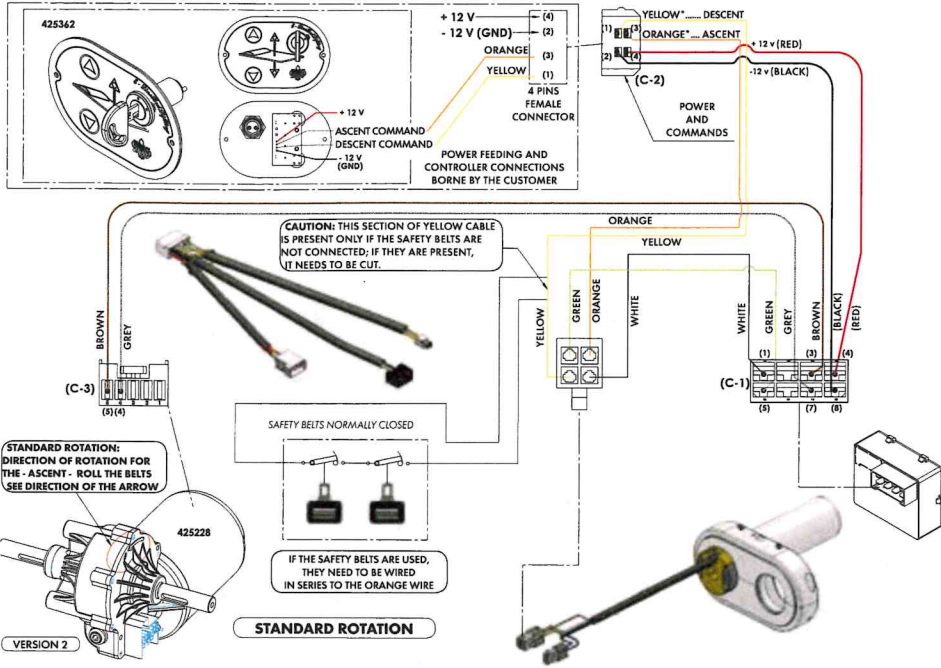

WIRING STANDARD ROTATION

